

NO.XD257-1C INSTALLATION INSTRUCTION

Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.

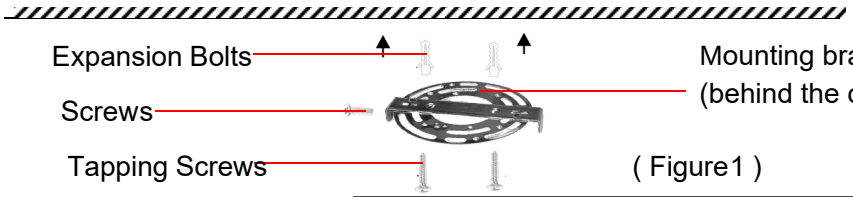

(Figure1)

Please refer to page 2 for detailed instructions on installing the mounting bracket

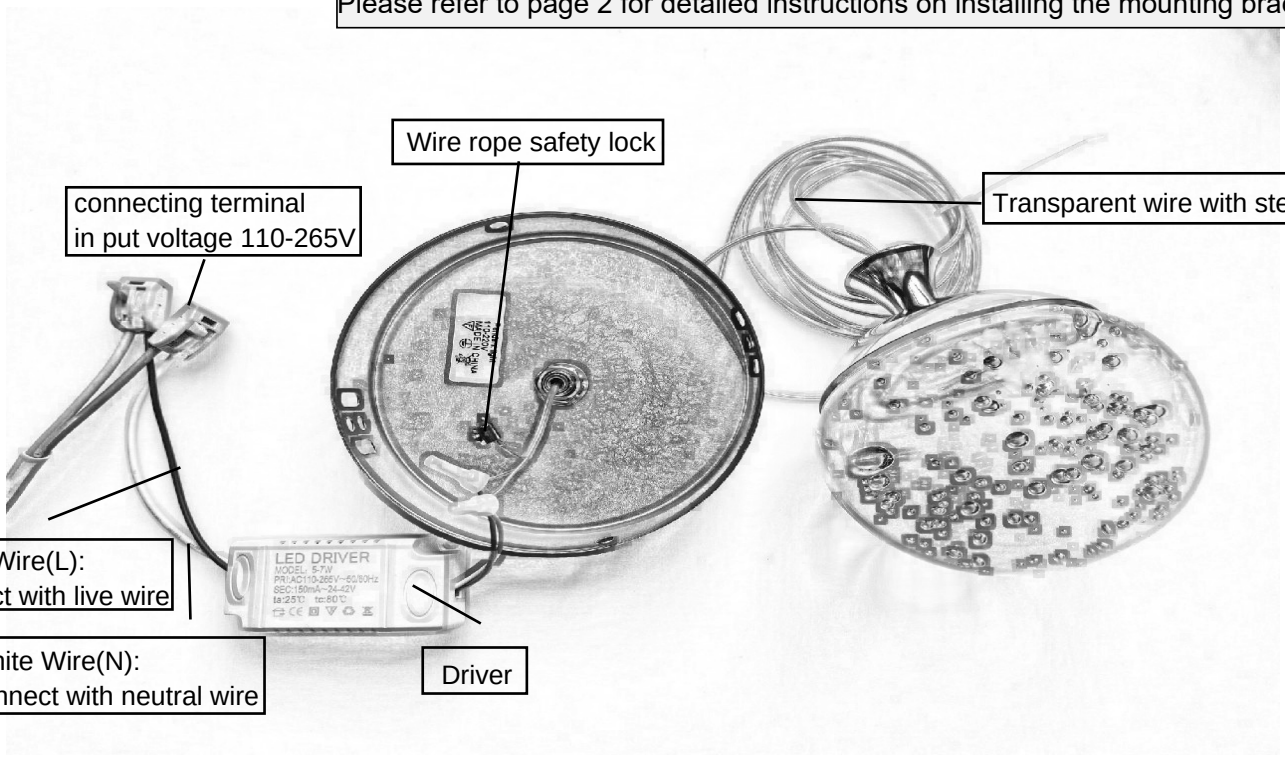

(Figure2)

Installation Steps:

1. Install the mounting bracket.
2. Remove the protective film from the surface of the light fixture. Avoid using knives or sharp tools to prevent scratching the fixture or damaging the wire insulation.
3. Assemble the steering head to the canopy as shown as the picture.
4. Test circuit: Connect the power wires with a temporary wire to test if the light is working properly before installing it to the ceiling.
5. Installation:Install the lamp body to the mounting bracket, and connect the power wires with the connecting terminals.
6. Turn on the power and double-check; the installation is complete.

Warning!

1.Installation should be performed by a professional.
2.To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3.This light fixture operates within a 110V to 260V range only.
4.Do not install the light fixture in damp conditions.
5.Keep the light fixture away from acidic and corrosive materials.




Pull the orange clip up to 90 degrees, insert the wire, then push the clip down to securely clamp the wire.

(figure 5)

Details of accessories



① Mounting Bracket *1



② 120 mm Canopy*1



③ 25mmL tapping screw*2



④ Expansion bolt *2



⑤ 25mmL Screw *2




⑥ 4 Screw*2



⑦ Flat washer *2

Installation instructions for mounting bracket

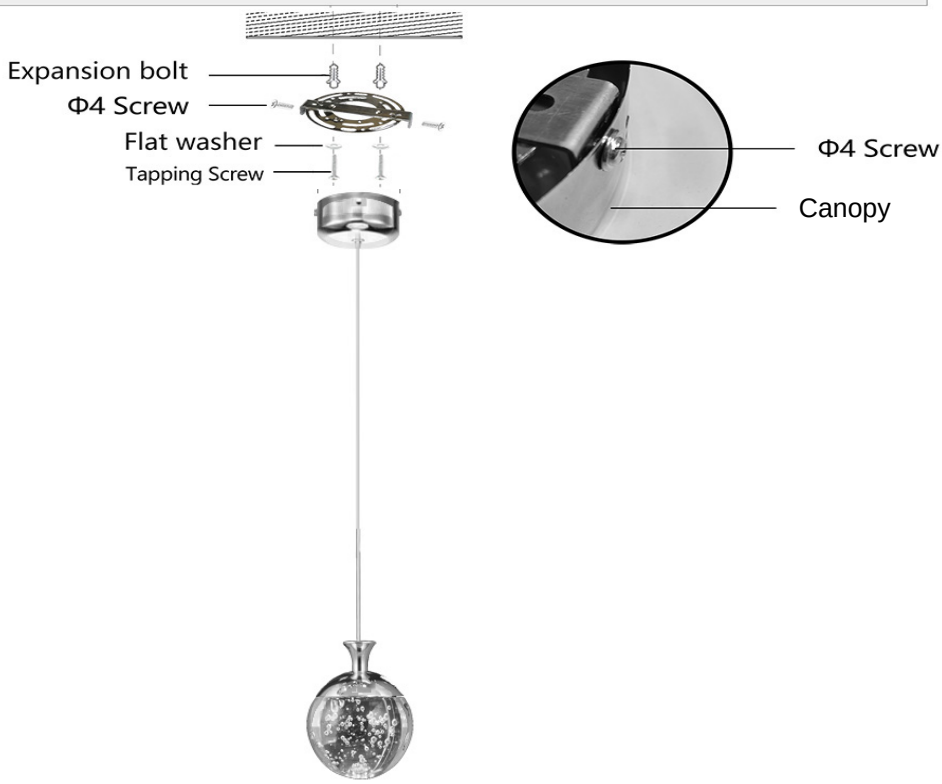

Steps to Install the Mounting Bracket:

Step 1: Position the mounting bracket on the ceiling to determine the lighting location, and mark the screw holes using a marker pen.
Step 2: Use an electric drill to drill holes at the marked locations, then insert expansion bolts into the holes using a hammer.
Step 3: Secure the mounting bracket to the expansion bolts using tapping screws (each tapping screw should be accompanied by a flat washer).
Step 4: Assemble the lighting frame using double-ended metal tubes. Test the electrical connections before mounting to the ceiling.
Step 5: Connect the lamp driver to the ceiling power cord, then securely attach the lamp to the mounting bracket using screws.