

LSEL6330SE

6.3 cu ft. Electric Slide-in Range with EasyClean®

- 6.3 cu. ft Large Capacity
- Fan Convection
- UltraHeat™ 3.2kW 2-in-1 Dual Element
- 4 Radiant Electric Elements
- WideView™ Window
- EasyClean®



AVAILABLE COLORS



STAINLESS STEEL

SUMMARY

Type	Electric Single Oven
Total Oven Capacity (cu.ft.)	6.3
Available Colors	Stainless Steel

COOKTOP

Type	Radiant, Ceramic Glass
No. of Radiant Elements	4
Element Size/Wattage - Left Rear	6" Single, 1200W
Element Size/Wattage - Right Rear	6" Single, 1200W
Element Size/Wattage - Left Front	9" / 6" Dual, 3200W UltraHeat™
Element Size/Wattage - Right Front	9" / 6" Dual, 3200W UltraHeat™
Center (Warming Zone)	-
Hot Surface LED Indicator	Yes

OVEN FEATURES

Broil Element (Watt)	2600W
Oven Bake Element Wattage	2200W
Convection Type	Traditional
Oven Modes	Wark, Bake, Broil, EasyClean
Oven Control Features	Knob
Convection Conversion	No
Easy Clean®	Yes
GoCook Smart Oven Light	Bulb
No. of Rack Positions	7
Door Lock	No

DRAWER FEATURES

Type	Fixed
Time Control	No

SMART FEATURES

ThinQ® (Wi-Fi Enabled)	No
Smart Recipe (3rd Party Recipe App)	No
Proactive Customer Care	No
SmartDiagnosis™	No
NFC Tag On	No

ACCESSORIES

Standard Rack	Yes (2)
---------------	---------

POWER/ RATINGS

Amp Rating at 208V	41.3A
Amp Rating at 240V	47.7A
kW Rating at 208V	8.6kW
kW Rating at 240V	11.5kW
Required Power Supply (amp)	40A

DIMENSIONS/ CLEARANCES/ WEIGHT

Product Dimensions (WxHxD)	29 7/32" x 37 1/4" x 29 7/8"
Oven Interior Dimensions (W x H x D)	24 13/16" x 22 1/16" x 20"
Caninet Width	30"
Shipping Dimensions (WxHxD)	32 1/2" x 44" x 30 1/2"
Product Weight (lbs.)	135.6
Shipping Weight (lbs.)	162

LIMITED WARRANTY


Parts & Labor	1 Year
---------------	--------

UPC CODE

LSEL6330SE	048231347457
------------	--------------

LSEL6330SE

DIMENSION / CLEARANCES

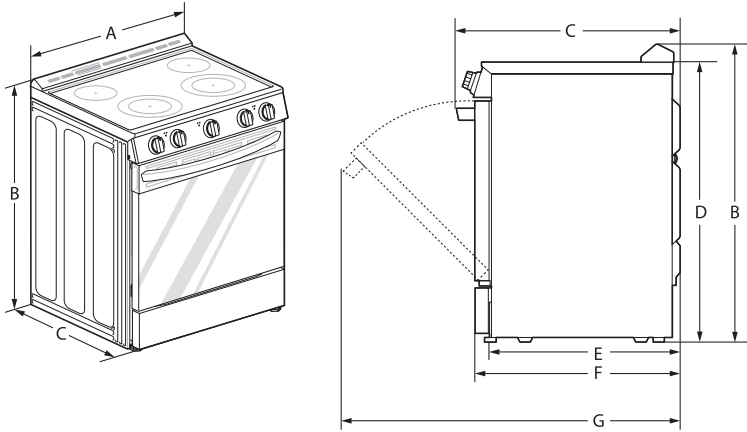


DIMENSIONS

A	Width	29 7/8" (759 mm)
B	Height	37 1/4" (946 mm)
C	Depth (Includes Door Handle)	29 7/32" (742 mm)
D	Height (Excludes Vent Trim)	36" (914 mm)
E	Depth (Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles)	24 25/32" (628.4 mm)
F	Depth (Excludes Door Handle)	26 27/32" (682 mm)
G	Depth when drawer is fully opened	48 5/8" (1235.9 mm)




Minimum Dimensions

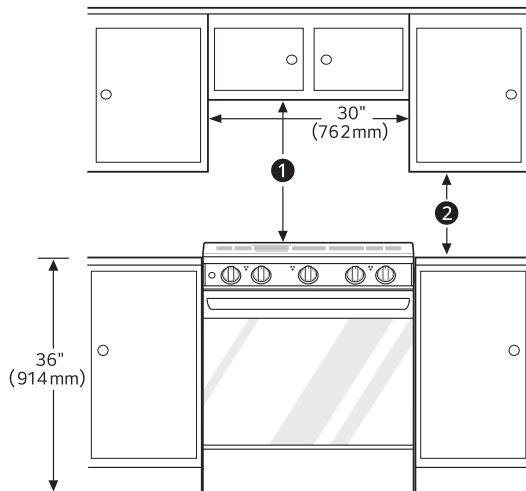

① 30" (76.2 cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" (0.381 mm) stainless steel, 0.024" (0.610 mm) aluminum or 0.020" (0.508 mm) copper.

② 15" (38.1 cm) minimum between countertop and adjacent cabinet bottom.

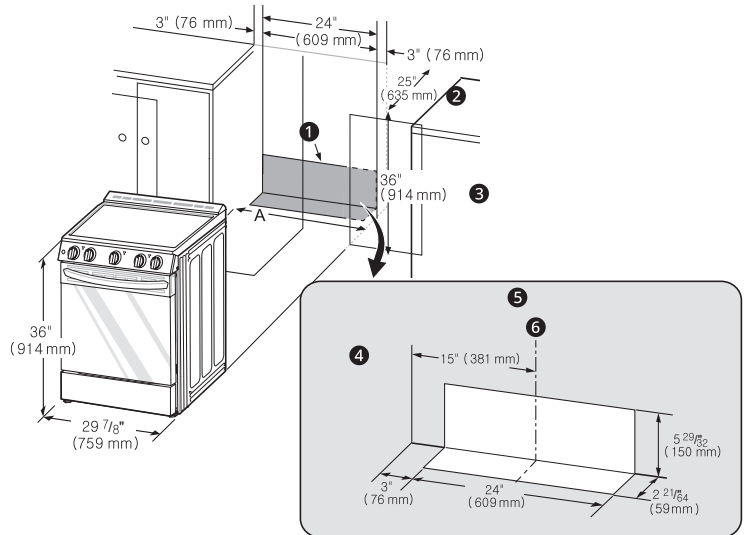

① Acceptable electrical outlet area

② Normal counter top depth

③ Counter top height

④ Cabinet

⑤ Wall

⑥ Center

A (Cabinet opening)

= 30" (76.2 cm) ~ 31" (78.7 cm) For CANADA