



60" x 32" alcove bath, right drain K-878-S

#### **Features**

- Comfort Depth® design makes it easier to get in and out of the bath
- Enameled and recessed apron offers easier access and custom storage under bath
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Safeguard® slip-resistant surface provides excellent traction underfoot

### Material

KOHLER® enameled cast iron

### Installation

- Right drain
- Alcove

## **Required Products/Accessories**

K-7214 27" Cable Bath Drain

or

K-7259 Brass toe tap bath drain

### Recommended Products/Accessories

K-1601 Bath/whirlpool footstop, removable

K-14426 Wall-mount bath spout

K-14427 Wall-mount bath spout

K-23726 Drain treatment

K-23725 Cast iron cleaner

K-31798 Bath drain kit



# ADA

## Codes/Standards

ASME A112.19.1/CSA B45.2 ASTM F462 ADA ICC/ANSI A117.1 IAPMO Certification

# **KOHLER® Enameled Cast Iron Bath** and Shower Base Lifetime Limited Warranty


See website for detailed warranty information.







60" x 32" alcove bath, right drain **K-878-S** 

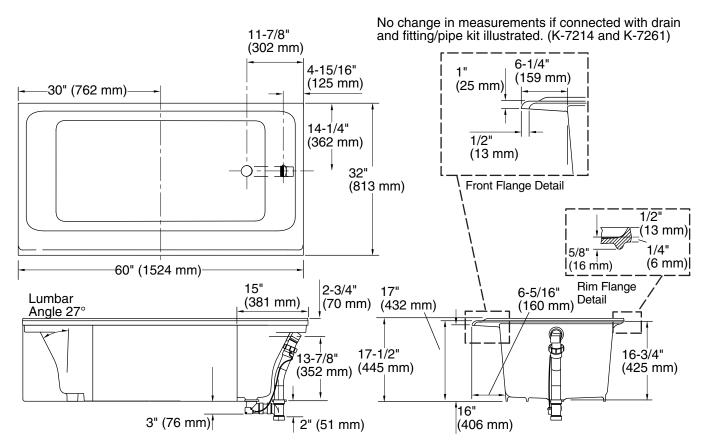

## **Technical Information**

All product dimensions are nominal.

Drain location: Right

Basin area, bottom: 43-7/8" x 20-15/16" (1114 mm x

532 mm)

Basin area, top: 53-3/16" x 23-5/16" (1351 mm x

592 mm)

Weight: 275 lbs (124.7 kg)

Minimum floor load: 54 lbs/ft² (263.7 kg/m²)

Water depth: 12-13/16" (325 mm)

Water capacity: 49.5 gal (187.4 L)

Minimum flat for 4" (101 mm)

door:

### **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

