


NE112-32

FEATURES

- ❖ 3kW Self-Draining Steam Generator
- ❖ Steam Aromatherapy Cup
- ❖ Multiply Body Massage Jets
- ❖ Hand-held Shower w/ Height-adjustable Bracket
- ❖ Rainfall Shower
- ❖ Thermostatic Faucet
- ❖ Black Tempered Glass walls and front Clear Glass
- ❖ Touch Glass Control Panel
- ❖ FM Radio
- ❖ MP3 & iPod Transmitter
- ❖ Chroma-therapy/LED Color Lighting
- ❖ Waterproof Oak Shower Grid & 2 Removable Benches
- ❖ Accessory Rack
- ❖ Polished Aluminum Trim
- ❖ Circulation Fan
- ❖ *Unit is reversible – call for details*

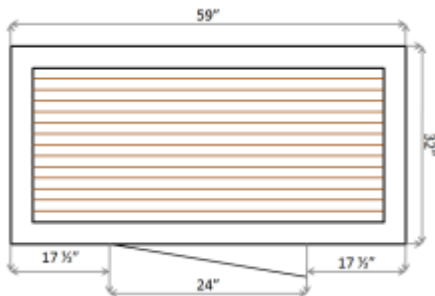

TECHNICAL INFORMATION

- **Materials:** Aluminum, Tempered Glass
- **Power Supply:** 220V
- **Steam Ready:** 2-5 MIN
- **Dimensions:** 59 x 32 x 84.5 IN

ELECTRICAL REQUIREMENTS

- 1 dedicated 12-2 wire with 20 amp GFCI breaker

PLUMBING REQUIRMENTS


- The unit is equipped with hot and cold, metal braided $\frac{3}{8}$ inch water supply hose with $\frac{1}{2}$ female national pipe threaded fitting.
- Need to install hot and cold shutoffs with $\frac{1}{2}$ -male national pipe thread (not included).
- Supply hoses are to connect from the faucet manifold on the unit to the shutoff valves.
- All water jet features are pre plumbed with reinforced braided flexible supply hose
- All fixtures and fittings should be checked for tightness as they may have become loose during transport
- **Optional Acrylic Base - Note:** The flexible drain hose that is included with this unit is for installation into a floor drain only. Substituting the existing drain shoe for a different one will not void the warranty as long as there is no damage or evidence of misuse to the base. Base needs to be leveled in its final resting position (all feet must be touching the ground), mark the placement, and then pull base out and begin assembly. It is advised to have base onsite before preparing drain location.
- **Note:** It is not required to drill holes in the base to secure unit to base. Silicon seal is sufficient.

GENERAL INFORMATION

- Units come broken down in panels and are assembled with screws, nuts and bolts on site.
- **BASE NOT PROVIDED. WOOD GRID SHOULD BE PLACED ON TOP OF TILE FLOOR OR PAN**
- Access panel near jets and controls is advised.
- ***Manufacturer reserves the right to change specs or features at anytime. Please check to confirm details. 1-866-783-2661***

NE112-32BAB


Steam Shower with Acrylic Base

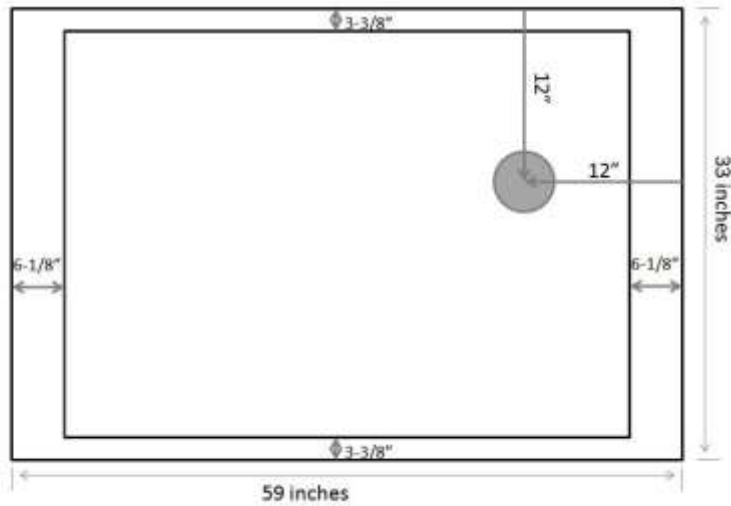

Height is adjustable: 6-7.5inches

NE112-32SB

Steam Shower with Stone Base

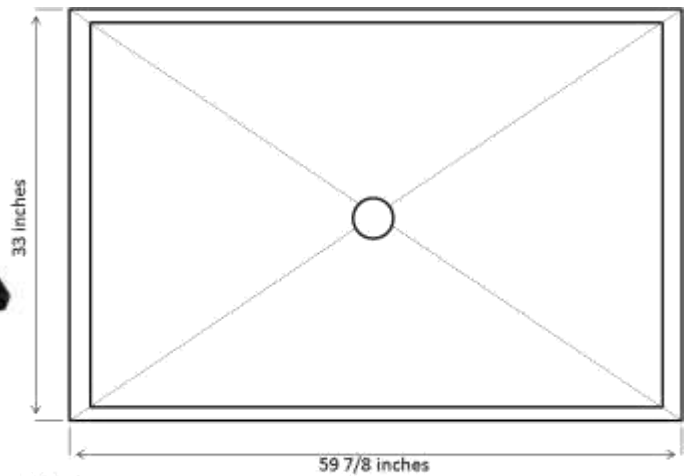

Height is 1 1/2 inch