

### Features

- Single lever handle allows for both on/off activation and temperature setting
- 8-1/2 spout reach.
- Includes the Awaken B90 multifunction handshower and 60" hose.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Bath filler: 9 gpm (34 l/min) @ 60 psi
- Handshower: 2.0 gpm (7.6 l/min) @ 80 psi
- Coordinates with Refinia faucets, accessories, and showering components to complete your bathroom.

### Material

- Premium Metal Construction
- KOHLER finishes resist corrosion and tarnishing

### Installation

- Floor-mount
- Requires K-97342 mounting block

### **Required Accessories**

K-97342 Mounting-block





### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense<sup>®</sup> California Energy Commission (CEC)

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## Available Color/Finishes

Color tiles intended for reference only.

Color Code Description



- CP Polished Chrome
- BN Vibrant® Brushed Nickel




# Refinia®

Floor-Mount Bath Filler Trim **K-T97334-4** 

# KOHLER. Faucets

Refinia® Floor-Mount Bath Filler Trim K-T97334-4

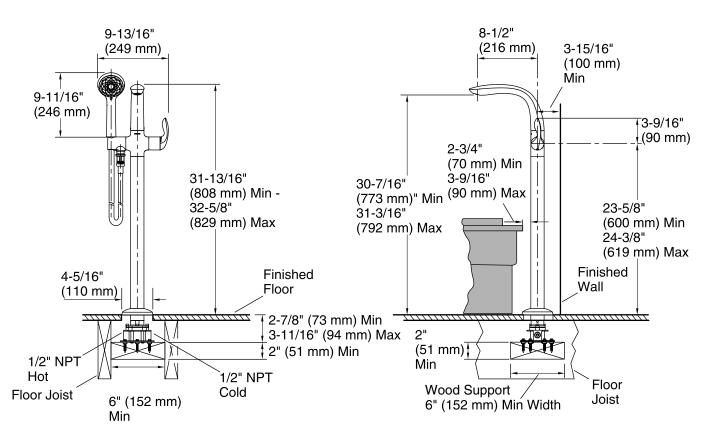

## **Technical Information**

All product dimensions are nominal.

Valve body: Composite

### Spout:

Spout reach: 8-1/2" (216 mm)

### Faucet:

Flow rate:7 gal/min (26.5 l/min)Pressure:45 psi (3.1 bar)

### Handshower:

Rated maximum flow: 2 gal/min (7.6 l/min)

### Notes

Install this product according to the installation guide.

Adequate floor support is required. The wood support must be a minimum of 2" (51 mm) thick by 6" (152 mm) wide. 2x6 lumber is NOT adequate for this application.

Concrete can be used as the floor support. Requires 3/16" masonry drill bit and six 1/4" x 1-3/4" concrete screws, not included.

