


Slide-In Dual Fuel Range

FCS366ES
057112090504

Installation

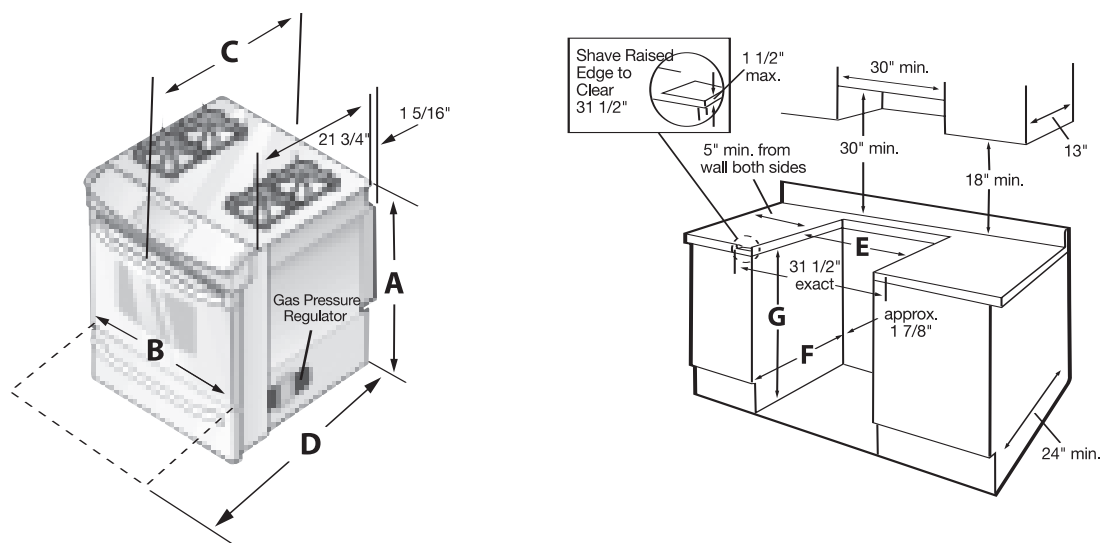

	EXTERIOR DIMENSIONS						CUT-OUT DIMENSIONS					
MODELS	A. HEIGHT		B. WIDTH	C. DEPTH		D. DEPTH WITH DOOR 90° OPEN	E. WIDTH	F. DEPTH		G. HEIGHT		
	MIN.	MAX.		TO NOTCH ON BACK OF CONSOLE	TO EXTREME PROTRUSION			MIN.	MAX.	MIN.	MAX.	
DUAL FUEL SLIDE-IN RANGES	35 5/8"	36 3/8"	30"	24 3/4"	28"	45 1/4"	30"	21 3/4"	22 1/8"	35 5/8"	36 5/8"	

Gas Oven Burner Ratings	
Bake	18,000 BTU Natural Gas / 16,000 BTU LP Gas
Broil	14,000 BTU Natural Gas / 13,500 BTU LP Gas
Convection Assist Element: 350 Watts	

Sealed Gas Burner Ratings	
Maximum Output	Low Turn-Down Output
16,000 BTU Natural Gas / 14,000 BTU LP Gas	1,800 BTU Natural Gas
14,000 BTU Natural Gas / 11,000 BTU LP Gas	1,500 BTU Natural Gas
12,000 BTU Natural Gas / 10,000 BTU LP Gas	1,200 BTU Natural Gas
9,500 BTU Natural Gas / 8,000 BTU LP Gas	850 BTU Natural Gas
5,000 BTU Natural Gas / 4,500 BTU LP Gas	675 BTU Natural Gas

Important: Because of continuing product improvements, Electrolux Major Appliances reserves the right to change specifications without notice. Dimension and cutout information is for planning purposes only. For complete installation details consult manual packed with product, or download manual at Customer Service, online at www.frigidaire.com.