

DMT2420

AMTK27, AMTK30, AMTK36, AOMTK27, AOMTK30


dacor
The Life of the Kitchen.®

Revised
06/17/08

Microwave Oven


1/1

**PLANNING
GUIDE**

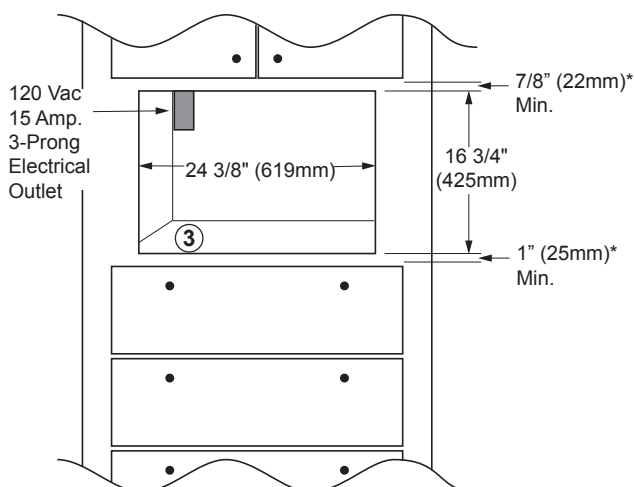


MICROWAVE AND TRIM KIT

*Bare minimum spacing: Includes additional space to avoid scrapping/vibration.

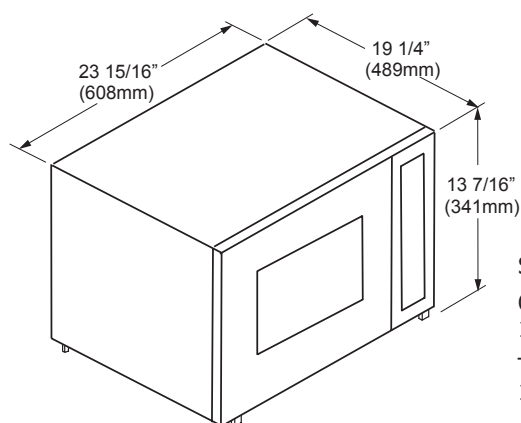


DMT2420 SPECIFICATIONS

Shipping Weight: 46 lbs.
Circuit Required: 120 Vac,
15 Amp. dedicated
Total (Connected Load):
1.5 Kw (12.5 Amp.)

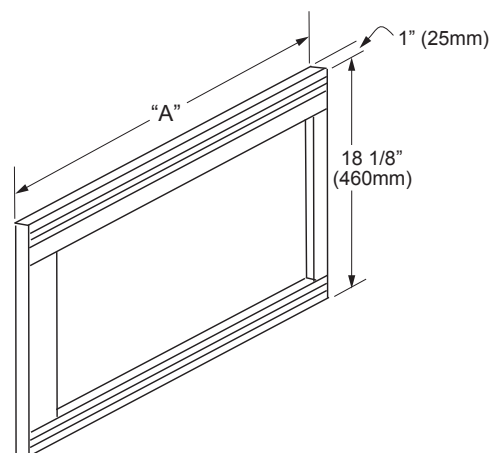

AMTK OVERALL DIMENSIONS
(Epicure® or Millennia™ Trim Kit)

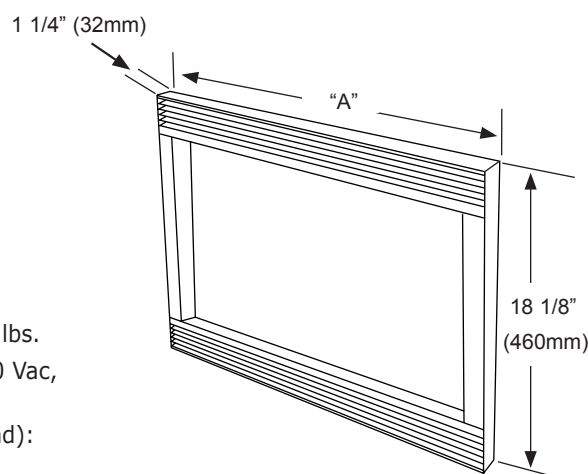

AOMTK OVERALL DIMENSIONS
(Preference® Trim Kit)



NOTE:

1. **24" (610mm) minimum exterior cabinet depth.**
2. **See the Combination Installation (CI) Section if installing with a wall oven or warming oven.**
3. **3/4" (19mm) support platform (flush with cutout).**
4. **Microwave is supplied with a 42" (1067mm) power cord, with a three prong grounded plug.**
5. **Tolerances: +1/16" (1.6mm), -0 unless otherwise specified.**

Model No.	"A" Overall Width	Trim Kit Overlays	Approximate Shipping Weight
AMTK27	27" (686mm)	5/8" (16mm) Top, 3/4" (19mm) Bottom	12 lbs.
AMTK30	30" (762mm)		12 lbs.
AMTK36	36" (914mm)		16 lbs.
AOMTK27	27" (686mm)		17 lbs.
AOMTK30	30" (762mm)		18 lbs.

DCM24

ACTK27, ACTK30, ACTK36, AOCTK27, AOCTK30


dacor
The Life of the Kitchen.®

Revised
05/05/08

Convection Microwave Oven


1/1

PLANNING GUIDE

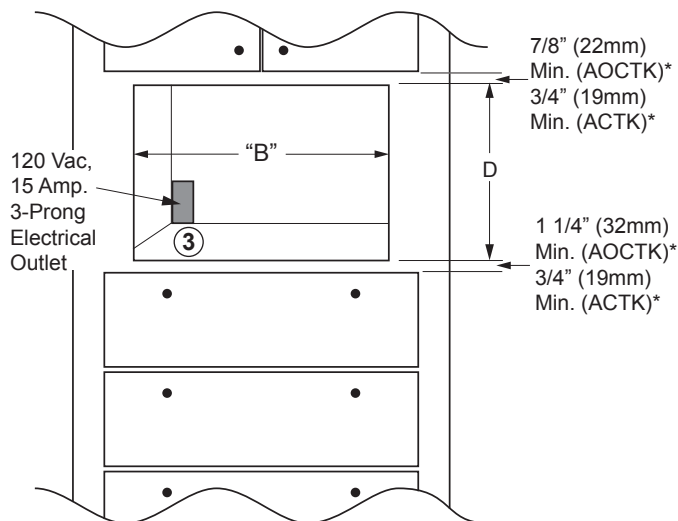

MICROWAVE AND TRIM KIT

*Bare minimum spacing: Includes additional space to avoid scrapping/vibration.

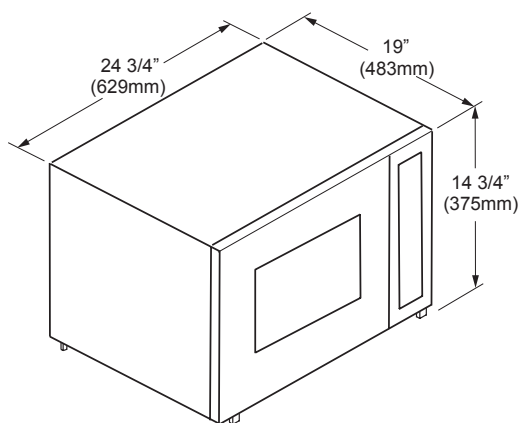


DCM24 SPECIFICATIONS




NOTE:

1. 24" (610mm) minimum exterior cabinet depth.
2. See the Combination Installation (CI) Section if installing with a wall oven, or warming oven.
3. 3/4" (19mm) support platform (flush with cutout).
4. Microwave is supplied with a 42" (1067mm) power cord, with a three prong grounded plug.
5. Tolerances +1/16" (1.6mm), -0 unless otherwise specified

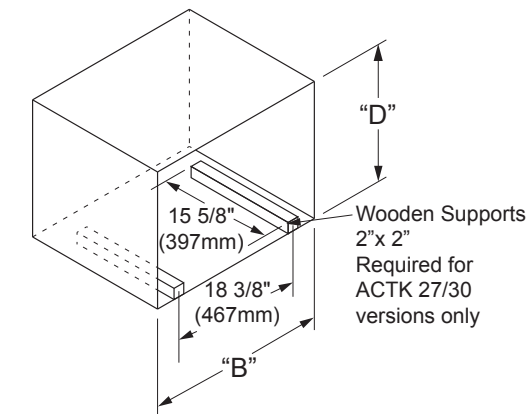


CUTOUT DIMENSIONS ISOMETRIC VIEW

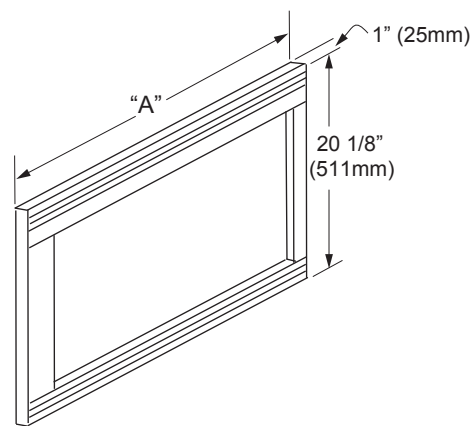

ACTK OVERALL DIMENSIONS

(Epicure® or Millennia™ Trim Kit - use these models when stacking with the Classic/Renaissance Wall Oven)

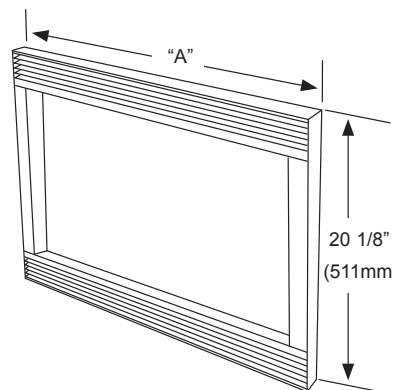

AOCTK OVERALL DIMENSIONS

(Epicure® or Millennia™ Trim Kit - use these models when stacking with the Discovery Wall Oven)

Shipping Weight: 60 lbs.

Circuit Required: 120 Vac,
15 Amp. dedicated

Total (Connected Load):
1.6 Kw (13 Amp.)

Model No.	"A" Overall Width	"B" Cutout Width	"D" Cutout Height	Top Overlay	Bottom Overlay	Approximate Shipping Weight
ACTK27	27" (686mm)	25 1/4" (641mm)	19 1/8" (486mm)	1/2" (13mm)	1/2" (13mm)	15 lbs,
ACTK30	30" (762mm)	28 1/4" (718mm)	19 1/8" (486mm)			16 lbs.
ACTK36	36" (914mm)	25" (635mm)	19 1/8" (486mm)			20 lbs.
AOCTK27	27" (686mm)	25 1/4" (641mm)	18 1/2" (470mm)	5/8" (16mm)	1" (25mm)	19 lbs.
AOCTK30	30" (672mm)	25 1/4" (641mm)	18 1/2" (470mm)			20 lbs.

Web: <http://www.Dacor.com>
Corporate Phone: 800-793-0093

Specifications are subject to change without notice.
See installation instructions for additional details.