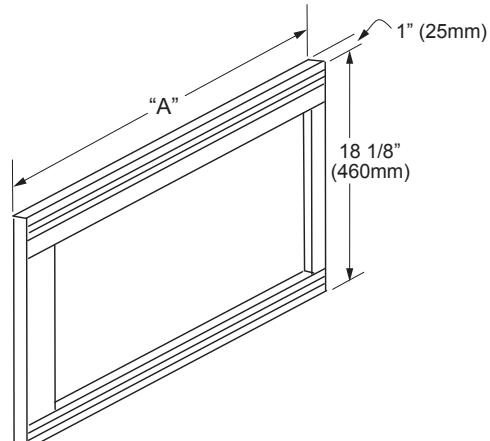
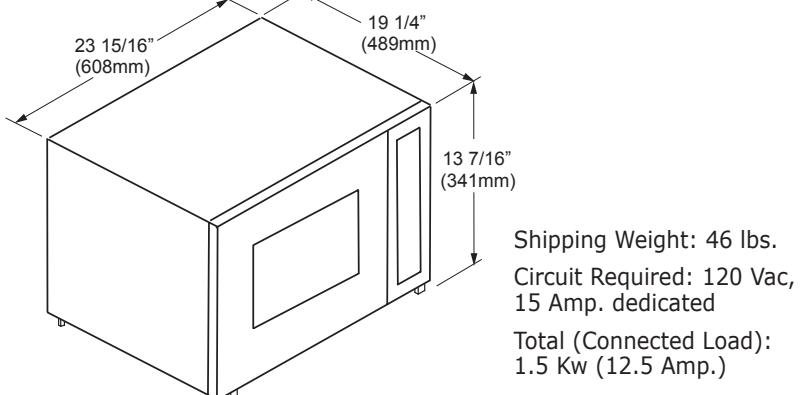
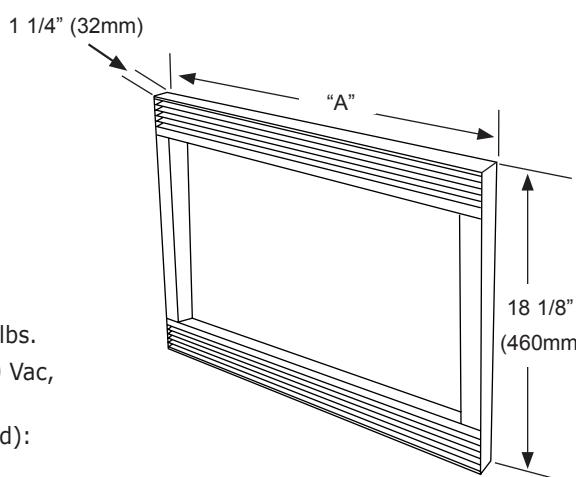


MICROWAVE AND TRIM KIT

*Bare minimum spacing: Includes additional space to avoid scrapping/vibration.

AMTK OVERALL DIMENSIONS
(Epicure® or Millennia™ Trim Kit)

DMT2420 SPECIFICATIONS

AOMTK OVERALL DIMENSIONS
(Preference® Trim Kit)

NOTE:

1. 24" (610mm) minimum exterior cabinet depth.
2. See the Combination Installation (CI) Section if installing with a wall oven or warming oven.
3. 3/4" (19mm) support platform (flush with cutout).
4. Microwave is supplied with a 42" (1067mm) power cord, with a three prong grounded plug.
5. Tolerances: +1/16" (1.6mm), -0 unless otherwise specified.

Model No.	"A" Overall Width	Trim Kit Overlays	Approximate Shipping Weight
AMTK27	27" (686mm)		12 lbs.
AMTK30	30" (762mm)		12 lbs.
AMTK36	36" (914mm)		16 lbs.
AOMTK27	27" (686mm)	5/8" (16mm) Top, 3/4" (19mm) Bottom	17 lbs.
AOMTK30	30" (762mm)		18 lbs.

DCM24

ACTK27, ACTK30, ACTK36, AOCTK27, AOCTK30




Revised
05/05/08

Convection Microwave Oven


PLANNING GUIDE

1/1

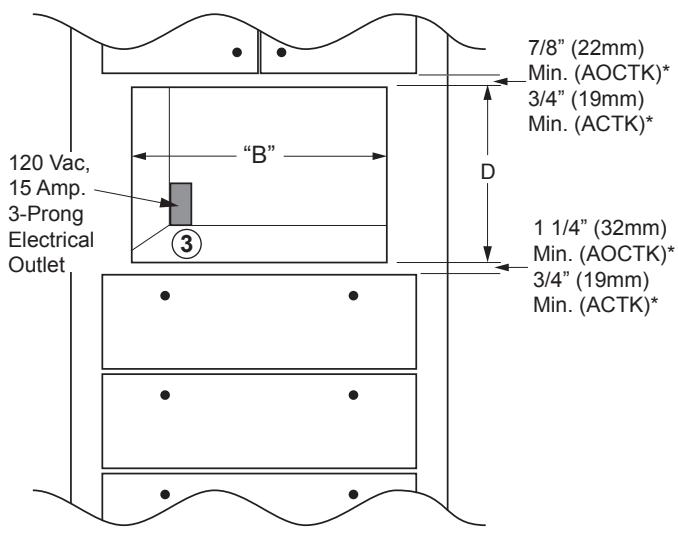

MICROWAVE AND TRIM KIT

*Bare minimum spacing: Includes additional space to avoid scrapping/vibration.

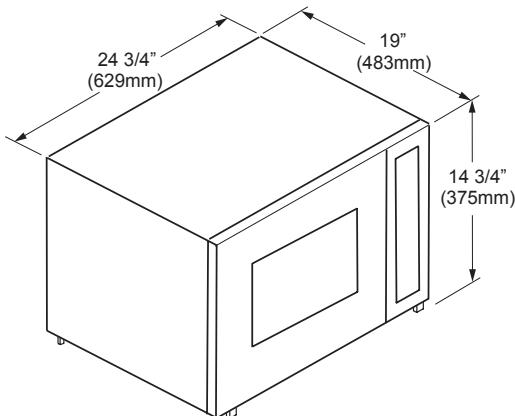

PCM24 SPECIFICATIONS

A small icon of a notepad with a pencil.


NOTE:

1. 24" (610mm) minimum exterior cabinet depth.
2. See the Combination Installation (CI) Section if installing with a wall oven, or warming oven.
3. 3/4" (19mm) support platform (flush with cutout).
4. Microwave is supplied with a 42" (1067mm) power cord, with a three prong grounded plug.
5. Tolerances +1/16" (1.6mm), -0 unless otherwise specified

Shipping Weight: 60 lbs.


Circuit Required: 120 Vac,
15 Amp. dedicated

Total (Connected Load):
1.6 Kw (13 Amp.)

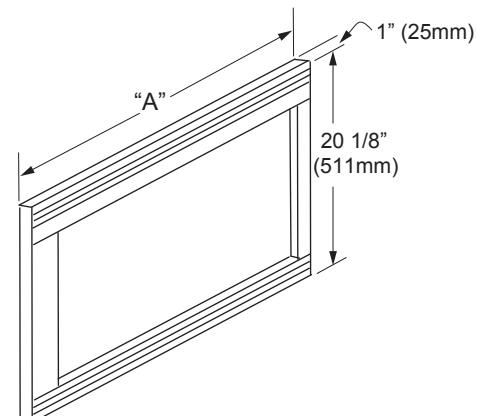

ACTK OVERALL DIMENSIONS

(Epicure® or Millennia™ Trim Kit - use these models when stacking with the Classic/Renaissance Wall Oven)

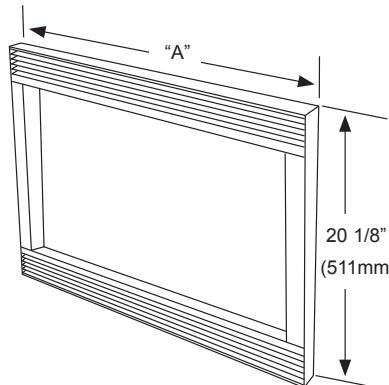

AOCTK OVERALL DIMENSIONS

(Epicure® or Millennia™ Trim Kit - use these models when stacking with the Discovery Wall Oven)

Model No.	"A" Overall Width	"B" Cutout Width	"D" Cutout Height	Top Overlay	Bottom Overlay	Approximate Shipping Weight
ACTK27	27" (686mm)	25 1/4" (641mm)	19 1/8" (486mm)	1/2" (13mm)	1/2" (13mm)	15 lbs,
ACTK30	30" (762mm)	28 1/4" (718mm)	19 1/8" (486mm)			16 lbs.
ACTK36	36" (914mm)	25" (635mm)	19 1/8" (486mm)			20 lbs.
AOCTK27	27" (686mm)	25 1/4" (641mm)	18 1/2" (470mm)	5/8" (16mm)	1" (25mm)	19 lbs.
AOCTK30	30" (672mm)	25 1/4" (641mm)	18 1/2" (470mm)			20 lbs.