

ASSEMBLY & INSTALLATION INSTRUCTION FOR #2006MP

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. This fixture include three sizes of tube(3"*1pc,6"*1pc,12"*3pcs)to be connected into various height. Choose desired installation height and thread fixture wires through each tubes to be used, Screw all tubes together until secure.
2. Thread the BOTTOM TUBE(19) onto the SOCKET ASSEMBLY(20), Pass fixture wires through SWIVEL ASSEMBLY(16) and Thread the SWIVEL ASSEMBLY(16) onto the UPPPER TUBE(17).
3. At the center of the BACK PLATE(2) there are eight perforated slots. Knock out the set matches your OUTLET BOX (1).
4. Screw the FIXTURE MOUNTING SCREWS (13) into the BACK PLATE (2) and thread the HEX NUTS (14) onto the FIXTURE MOUNTING SCREWS (13), as shown. Secure the position of the FIXTURE MOUNTING SCREWS (13) by tightening the HEX NUTS (14) against the BACK PLATE (2).
5. Carefully pass the power supply (6&8) wires and the SUPPLY GROUND WIRE (5) through the center hole of the BACK PLATE (2). Secure the BACK PLATE (2) to the OUTLET BOX (1) with MOUNTING SCREWS (3).
6. Attach the BLACK SUPPLY WIRE (8) to the SMOOTH (or BLACK) FIXTURE LEAD WIRE (9) by using the WIRE CONNECTOR (10). At the same manner, attach the WHITE SUPPLY WIRE (6) to the RIBBED (or WHITE) FIXTURE LEAD WIRE (7). Loop the FIXTURE GROUND WIRE (4) around the GROUND SCREW (11) of the BACK PLATE (2). (Note: Be sure to provide an extra 3" length of the FIXTURE GROUND WIRE (4) for connection to the SUPPLY GROUND WIRE (5).) Tighten the GROUND SCREW (11). Connect the remaining FIXTURE GROUND WIRE (4) to the SUPPLY GROUND WIRE (5) using a WIRE CONNECTOR (10). Place wiring and connections inside the OUTLET BOX (1).
7. Place the COVER PLATE (12) onto the FIXTURE MOUNTING SCREWS (13), and secure it into place using the DECORATIVE NUTS(15) provided.
8. Slide the GLASS SHADE(22) over the SOCKET(21), secure with and SOCKET RING(23).
9. Screw light bulb into the socket and make sure it does not exceed the maximum wattage specified on the fixture's wattage rating label.

INSTALLATION IS NOW COMPLETED

FIG

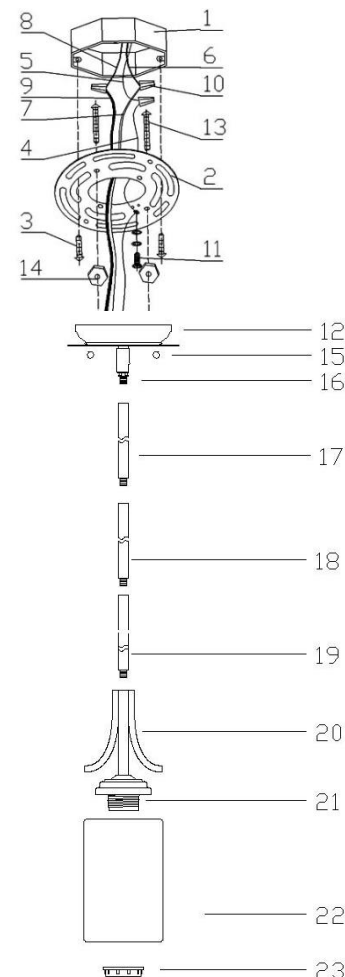

- | | | |
|--|--|---------------------|
| 1. OUTLET BOX | 9. SMOOTH (OR BLACK) FIXTURE LEAD WIRE | 17. UPPER TUBE |
| 2. BACK PLATE | 10. WIRE CONNECTOR | 18. MIDDLE TUBE |
| 3. MOUNTING SCREW | 11. GROUND SCREW | 19. BOTTOM TUBE |
| 4. FIXTURE GROUND WIRE | 12. COVER PLATE | 20. SOCKET ASSEMBLY |
| 5. SUPPLY GROUND WIRE | 13. FIXTURE MOUNTING SCREW | 21. SOCKET |
| 6. WHITE SUPPLY WIRE | 14. HEX NUT | 22. GLASS SHADE |
| 7. RIBBED (OR WHITE) FIXTURE LEAD WIRE | 15. DECORATIVE NUT | 23. SOCKET RING |
| 8. BLACK SUPPLY WIRE | 16. SWIVEL ASSEMBLY | |