


AMBIANCE® LANDSCAPE LIGHTING SYSTEM



9369-12 BLACK	200 FT. 12/2 60°C
9370-12 BLACK	500 FT. 12/2 60°C
9371-12 BLACK	200 FT. 12/3 60°C
9372-12 BLACK	1000 FT. 12/2 60°C
9373-12 BLACK	100 FT.* 12/2 105°C
9373-15 WHITE	100 FT.* 12/2 105°C

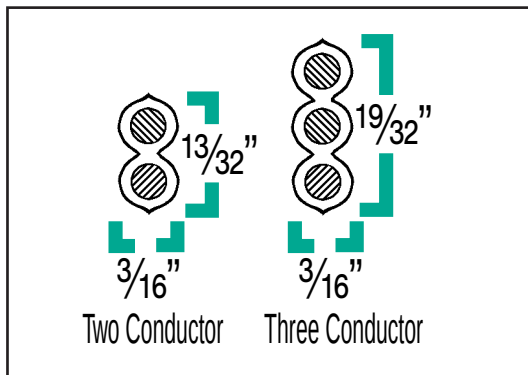

PRODUCT FEATURES:

- UL and CUL listed; 12 gauge outdoor.
- 250w capacity 12V.
- Specially designed, easy piercing, self-sealing insulation over stranded copper wire.
- Do not use nails or screws running through the cable to support it to a surface.
- UV stabilized and can be buried underground without conduit.

GENERAL TECHNICAL INFORMATION:

- High heat 105° C insulation around fine stranded 12 awg wire (9373-12/-15 only).
- Use of other manufacturers components will void the Sea Gull Lighting warranty, UL listing and create a potential safety hazard.
- Wattage per length: 250w max at 12V.
- * Must be used with the linear Ambiance System (i.e. 9328, 9429, 9329, etc.).
- * Use with 9435 track or with 9328 or 9429 socket with wire clip.

9369,9370,9371,9372,9373 TECHNICAL INFORMATION

INSTALLATION AND SAFETY INSTRUCTIONS

**DO NOT NAIL OR SCREW THROUGH
CABLE TO ATTACH TO A SURFACE.**

Drill 1/2" diameter holes in surface where
cable will be running through deck, railing, etc.

**CAUTION: To avoid risk of fire,
DO NOT exceed these limits:**

1. 12/2 Ambiance™ cable is suitable for 12V
only, for 250W consumed load.