

MMi DOOR Severe Weather Entry Units

Our Severe Weather Entry Unit is approved for use in a range of entrance systems to meet Florida and Texas wind-borne requirements in areas where wind speeds can exceed 140 mph. Our Impact Glass meets DP±47 wind and missile impact code requirements to the WBDR areas (Wind-Borne Debris Region). The laminated glass construction suppresses noise with a sound transmission class (STC Value) of 36.

Plastpro Fiberglass Doors have been put through a rigorous battery of tests, first in Plastpro's own testing lab and again by an independent testing facility. The results meet or exceed the Florida Building Standards.



Full length composite stiles, top and bottom rails prevent any water penetration and enhance screw holding ability.

Impact resistant, reinforced skin with deep embossment creates beautiful shadow lines and will not split, warp, dent or rust.

Wide full length LVL for strength and durability provides more stability for multipoint hardware.


No seal or finish is ever required for qualifying warranty.

100% Composite poly-fiber PF Frame is insect resistant, will not rot or split. Twice the screw-holding power.



Hurricane Impact Frame


ODL's patented frame design, which is mechanically fastened in the corners to prevent flex, adds strength to the door. With a classic frame profile, the narrow aluminum extrusion adds strength.



0.090" PVB Inner Layer
0.125" Glass Panel

Impact-Resistant Laminated Glass

Our decorative doorglass, blinds and grilles are sealed between impact-resistant glass on the exterior and tempered safety glass on the interior.

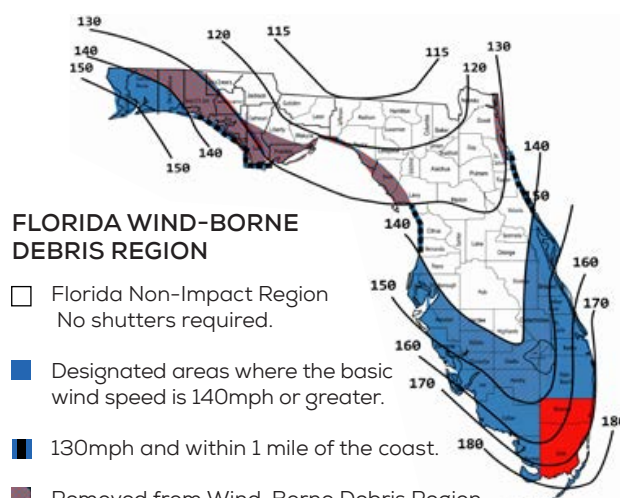

FLORIDA WIND-BORNE DEBRIS REGION

- ☐ Florida Non-Impact Region
No shutters required.
- Designated areas where the basic wind speed is 140mph or greater.
- 130mph and within 1 mile of the coast.
- Removed from Wind-Borne Debris Region
- High Velocity Hurricane Zone Broward and Dade County

TEXAS FIRST TIER COASTAL COUNTIES

- Seaward Zone
130 mph 3-second gust design wind speed
- Inland (I) Zone
120 mph 3-second gust design wind speed
- Inland (II) Zone
110 mph 3-second gust design wind speed

Please consult your architect, contractor, or building official for the rating needed for your area and home.

MMi DOOR LOCATIONS

Michigan (HQ)

6361 Sterling Drive North
Sterling Heights, MI 48312
586.264.0950
800.686.9218
Fax: 586.264.5430

Ohio

400 Circle Freeway Drive
Cincinnati, OH 45246
513.874.6771
800.215.3770
Fax: 513.870.0242

Pennsylvania

172 Plummer Road
Sidman, PA 15955
814.487.7800
800.452.0251
Fax: 814.487.7850