



## Corner Stabilizer #48586 Assembly and Operating Instructions

## by TIE DOWN

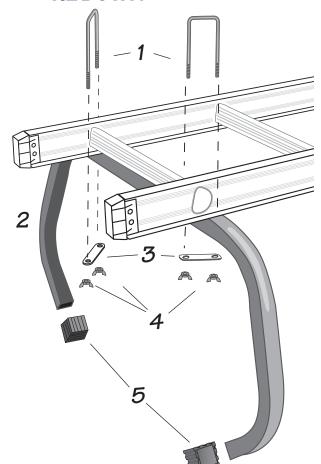

#	Description	Qty
1	U-bolts	2
2	Corner Stabilizer	1
3	Mounting Brackets	2
4	Wing Nuts	2
5	End Cana	2



## **Assembly instructions**

- 1. Lay the ladder flat on the ground with the "Wall Side" down.
- 2. Lift the end of the ladder up and position the Corner Stabilizer in desired mounting position (under to top rung) The ladder should rest in place over the stabilizer bar.
- 3. Place u-bolts (1) over the side of the ladder near the ladder rung, and over the Corner Stabilizer (2) in a 45 degree angle. NOTE: Position the u-bolts so that they straddle the ladder side rail and top ladder rung as shown above right.
- 4. Fasten the stabilizer (2) to the inside of the ladder using two mounting brackets (3) and four wing nuts (4).
- 5. Hand tighten wing nuts (4).
- 6. Flip the ladder/stabilizer over and press the rubber end caps on the ends of the stabilizer tube. Tap the caps on with a rubber mallet if needed to assure a tight fit.

Instructions #08127 (e1160 - Rev. 8/30/21)



404-344-0000 • www.tiedown.com 605 Stonehill Drive SW, Atlanta, GA 30336 sales@tiedown.com