



## Two-piece elongated toilet with skirted trapway, 1.28

gpt

K-3814-RA

### **Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Revolution 360<sup>®</sup> flushing technology generates a forceful swirling motion to keep the bowl clean longer
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Right-hand Polished Chrome trip lever
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- CleanCoat™ surface treatment inhibits the growth of water scale and mineral stains for improved ease of cleaning
- Combination consists of the K-4144 bowl and K-4143-RA tank
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- Eligible for consumer rebates in some municipalities
- 1.28 gpf (4.8 lpf)

### Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Seat and supply line sold separately

### Recommended Products/Accessories

K-7637 Angle Supply with Stop (single)

K-5383 10" rough-in full skirt trap and attachment system

K-5381 14" rough-in full skirt trap and attachment system

K-20120-R Trip Lever

1023457 Wax Ring/Hardware Kit


1265114 Connector Hose

K-4636-RL Cachet® ReadyLatch® Quiet-Close™ elongated

toilet seat

### **Included Components**

K-4144 Elongated toilet bowl with skirted trapway




Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to <a href="https://www.kohler.com">www.kohler.com</a> USA or <a href="https://www.kohler.ca">www.kohler.ca</a> Canada

7-3-2025 19:53 - US/CA







### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1

CSA B651 OBC

# **KOHLER® Toilets and Seats Limited Warranty**

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit








Two-piece elongated toilet with skirted trapway, 1.28

gpf

K-3814-RA

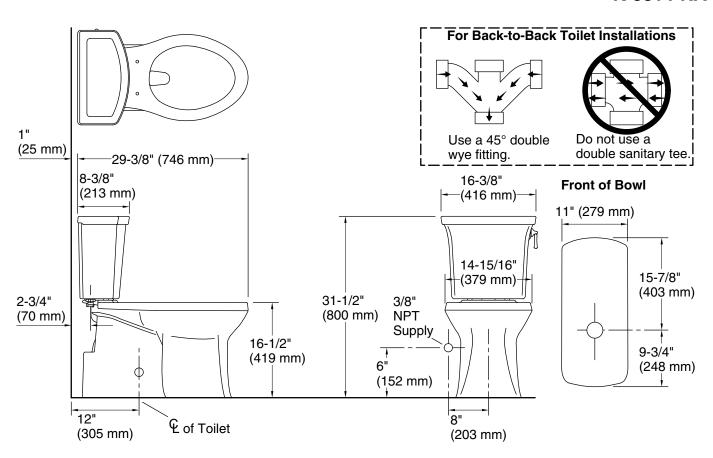

### **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated

Flush type: Revolution 360, AquaPiston

Trap passageway: 2-1/8" (54 mm)

Water surface size: 9-3/4" x 7-1/4" (248 mm x 184 mm)

Rim to water 6-1/4" (159 mm)

surface:

Rough-in: 12" (305 mm)

### **Fixture Supply Requirements**

Min static pressure: 15 psi (103.4 kPa) Max static pressure: 80 psi (551.6 kPa)

### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

