

LITTLE BLASTER™

SET-UP INSTRUCTIONS

MACHINES WITH 300 CFM RECLAIM

*** READ BEFORE OPERATING EQUIPMENT ***

1. Remove plastic from machine.
2. Remove lag bolts from each of the four legs, then remove machine from the pallet.
3. Remove reclaim, and boxes, from machine
4. Install air controls, hoses, foot control regulator, etc.
(SEE PAGE 5 - FIGURE 2)
5. Lift grate and pull gun and hoses into slot provided in front center grate. Lower grate back into place.
6. Remove wrapping from reclaimer.
7. Open bag of hardware, nuts, bolts, clamps, putty tape, etc. **(REFER TO FIGURE 6 - PAGE 9)**
8. Position reclaimer with mounting bracket (#1) so that the inlet hole on bracket is aligned with the inlet hole in back of cabinet. Secure reclaimer to the machine with bolts provided using four holes punched on the back of machine. (Two people are needed to install the reclaimer).
9. Attach media hose (#6), that feeds to bottom of blast gun housing to media valve (#4).
10. Attach flex hose (#5), to sump adapter (#2), and reclaimer inlet with clamps (#7).
11. Attach filter bag (#9), to reclaimer outlet with hose clamp (#8).
12. Connect to reclaimer motor male plug (#10), to female plug cord from the light box.
13. Connect compressed air supply to fitting provided on left rear leg of the machine. Air piping should be of the same size as the connection point, offering no restriction to flow.

(DO NOT USE QUICK-DISCONNECTS)
14. Connect the factory installed male cord from light box, to a 120-Volt, 60 HZ, 1 Phase power supply. A 20 AMP breaker or fuse should be used.

MAKE SURE MACHINE IS PROPERLY GROUNDED.

LITTLE-BLASTER™

SET-UP INSTRUCTIONS

LITTLE-BLASTER AIR CONTROLS INSTALLATION

***** READ BEFORE OPERATING EQUIPMENT *****

1. Remove box from machine with Blast Gun and Air Controls.
2. Connect regulator to bracket with lock ring.
3. Connect inlet air hose to left rear leg of machine.
4. Run air hose through machine sump grommet and connect to gun handle.
5. Connect media hose to pick-up tube.

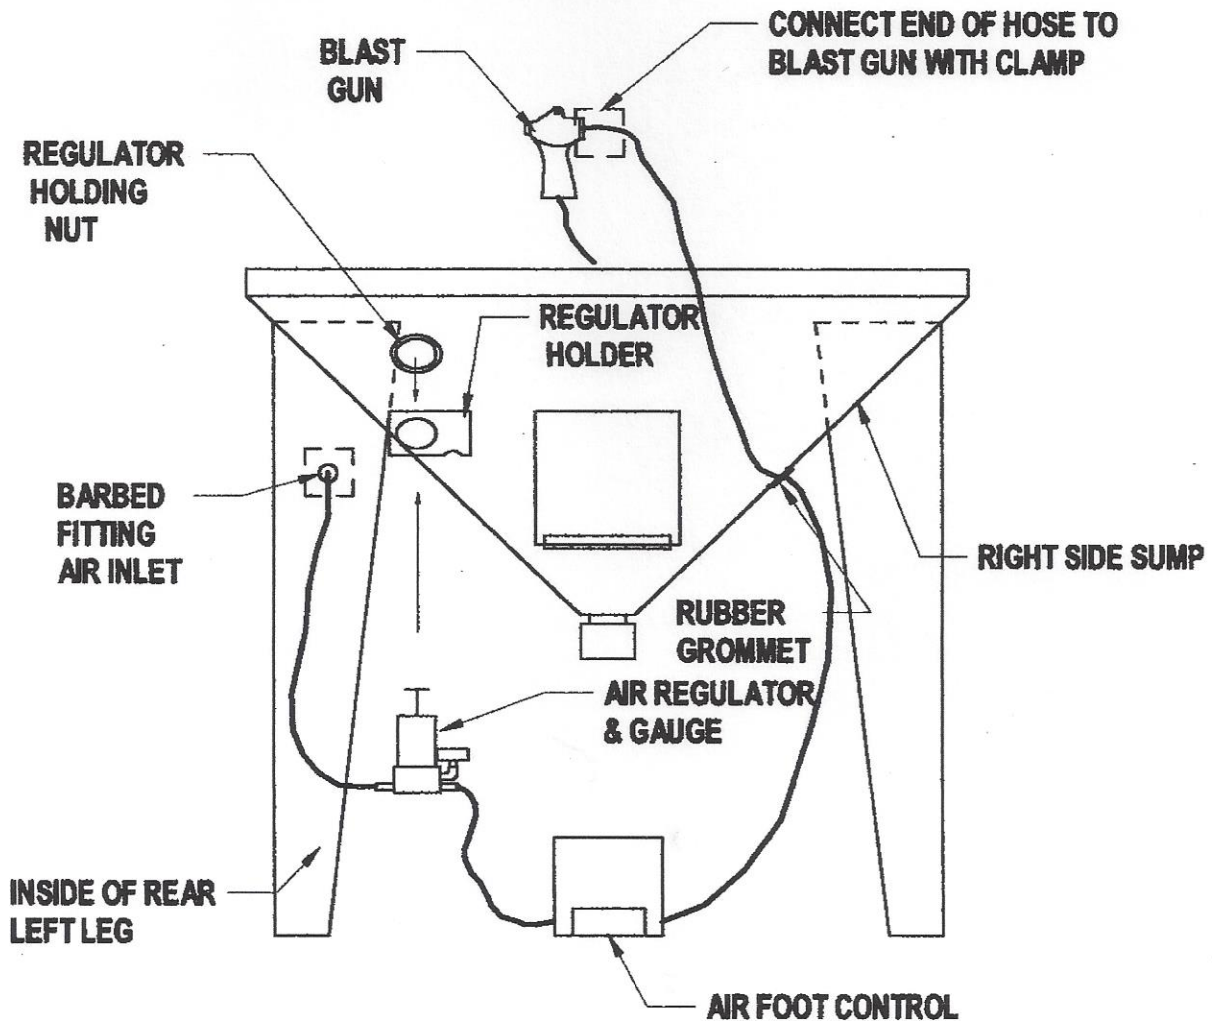


Figure 2