




RainPoint[®]
More Than Water Saving

USER MANUAL

2-Zone Smart Hose Timer

Model No. HTV213FRF

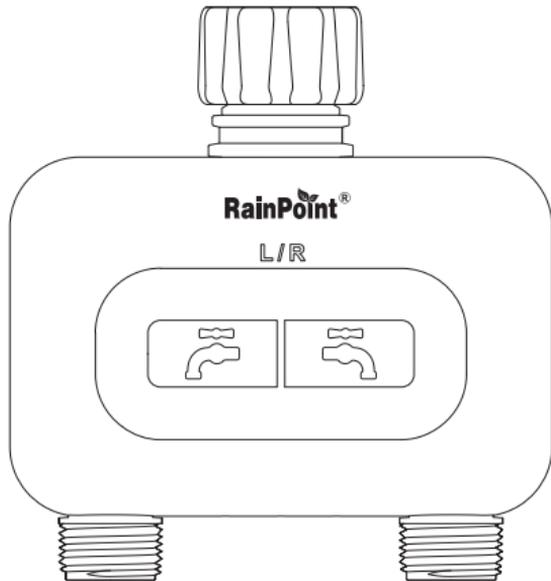


Welcome to the **RAINPOINT** family! Please read the manual before use to learn about the features and functions.


Contents

| | | |
|------------|-------------------------|-----------|
| 1. | Box Contents | 01 |
| 2. | Introduction | 02 |
| | 2.1 Product Overview | 02 |
| | 2.2 Specifications | 03 |
| | 2.3 Product Features | 03 |
| 3. | Connection | 04 |
| 4. | Installation | 08 |
| 5. | APP Setting | 09 |
| | 5.1 Device Home Page | 09 |
| | 5.2 Basic Settings | 10 |
| | 5.3 Plan Setting | 12 |
| | 5.4 Charts | 14 |
| | 5.5 Manual | 14 |
| 6. | Smart Page | 15 |
| 7. | Troubleshooting | 17 |
| 8. | Precautions | 19 |
| 9. | Warranty Policy | 19 |
| 10. | FCC Statement | 20 |
| 11. | Customer Support | 21 |


1. Box Contents

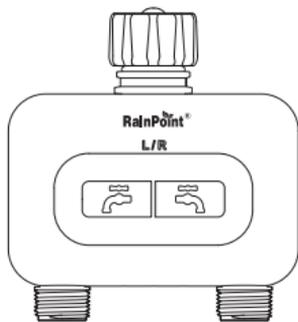


1



3



2





4

1. 1 X HTV213FRF 2-Zone Smart Hose Timer
2. 1 X User Manual
3. 1 X Sealing Tape
4. 1 X Warranty Card

2. Introduction

2.1 Product Overview

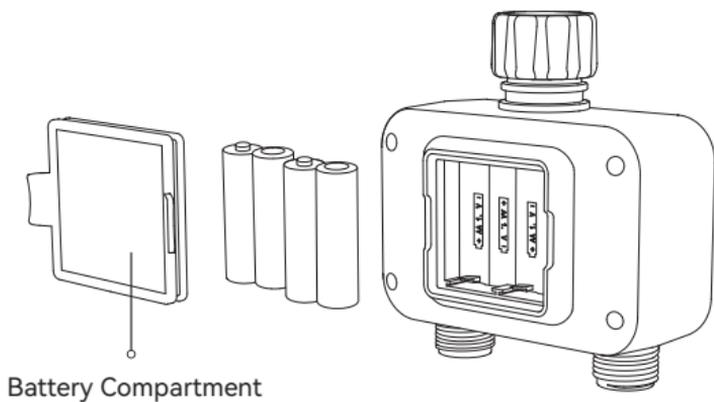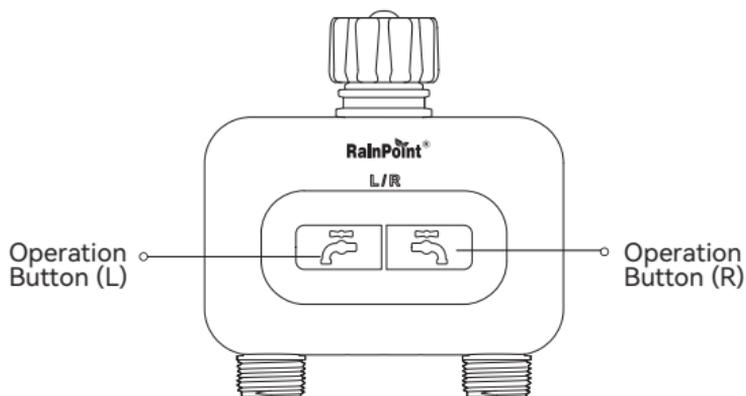

2.2 Specifications

- **Range:** 197 ft.(60 m) to hub, without interference
- **WiFi:** 2.4GHz Only
- **Waterproof Level:** IP54
- **Pressure Operating Range:** 7~116 psi (0.5~8 bar)
- **Flow Rate Range:** 1.32~9.25 gal/min (5~35 L/min)
- **Watering Duration:** 1min~12hrs
- **Temperature Operating Range:** 37°F~122°F (3°C~50°C)
- Maximum 6 plans per zone
- 4 AA batteries required (Not included)

Tips:

- Not For Use With Appliances.
- Do Not Mix Alkaline, Standard (Carbon-Zinc), or Rechargeable (Nickel Cadmium) Batteries.
- Used up or dead batteries must be removed from the timer and disposed of properly.
- For Outdoor Use With Cold Water Only.

2.3 Product Features

- App WiFi remote controlled
- Built-in flow meter with leak alert
- APP real-time water flow rate display
- APP water consumption history review
- **3 watering modes:** Irrigation/ Interval/ Cycle & Soak
- Set watering plans based on water usage
- Add a paired soil sensor to automatically monitor watering progress based on soil temperature and moisture data
- Auto start or stop watering base on soil moisture level
- Compatible with Amazon Alexa and Google Assistant voice control
- Multi-Zone outlets to meet more watering needs

3. Connection




Tips: Scan the QR code or search the URL below to watch the video which will guide you through the basics, from setting up your hose timer to using unique features.

Video Address: <https://bit.ly/4eqh2ks>


Pair timer with hub

In order to remote control and manage irrigation plans, this timer needs to be paired with hub. Please refer to hub user manual to download app and connect the hub with WiFi network first.



1. After the hub is successfully connected with WiFi, select hub device on app home page, touch **"Add Device"** on hub home page.

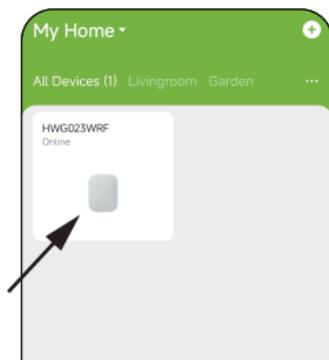


2. Select the category "**Controller**" on the left and then find model "**HTV213FRF**", or press  on the top right corner to scan product QR code and enter pairing below.

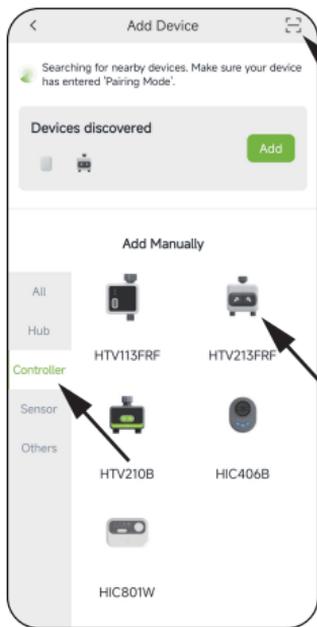

3. Tap Next and move onto Pairing page.

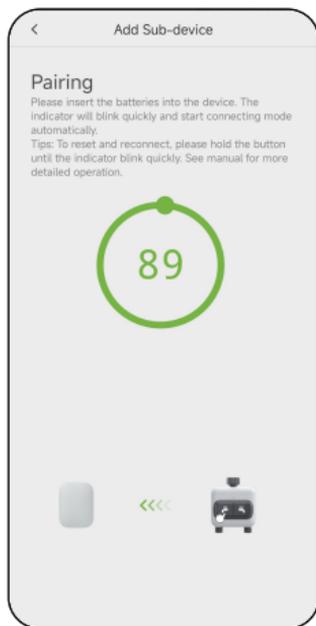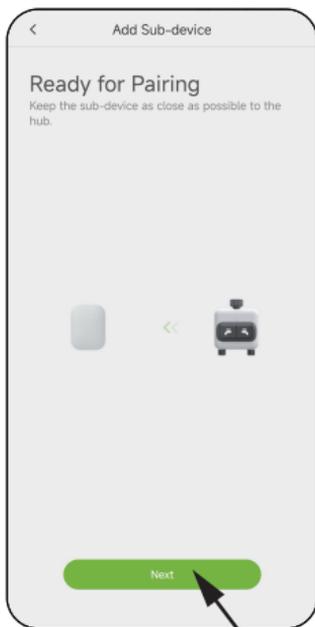


4. **Insert 4 new AA batteries (NOT Included).** And press and hold the **Operation Button(L)** for 5 seconds until the indicator flashes red quickly. Then the timer will start pairing automatically.

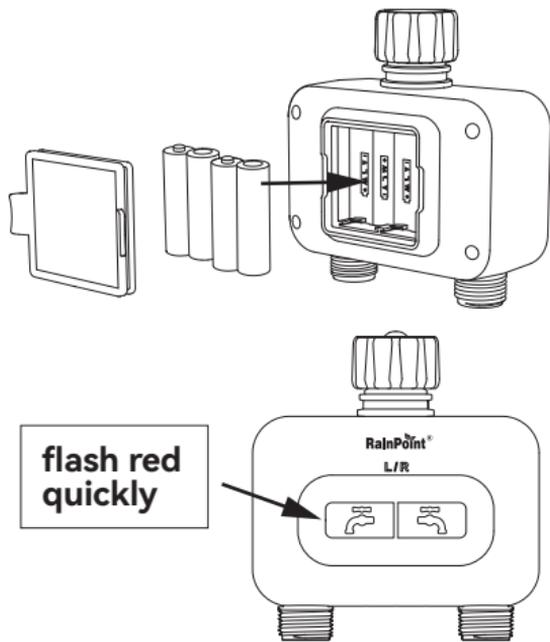

Tips:

- Make sure your hub and timer stay close together during pairing.
 - If at any time you need to re-pair or do a factory reset, press and hold the **Operation Button (L)** until the red indicator light flashes quickly to activate pairing mode manually.
5. After successfully connecting, the last water usage value will display on the middle of **Device Home Page**. The next watering plan time will display as well after you creat plans.

4. Installation

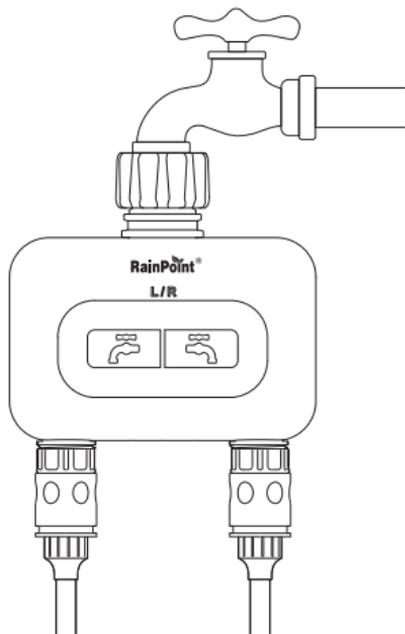


NOTE:

1. Install your Smart Hose Timer as vertically to the ground as possible. Avoid material fatigue caused by horizontal or angled connections.
2. For better signal connection with the WiFi hub, please do not place the timer in an underground valve box.

5. APP Setting

5.1 Device Home Page

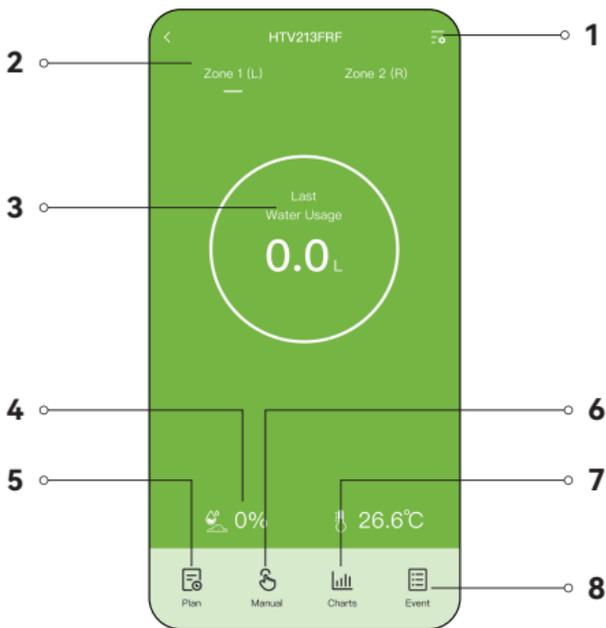

1. **Setting:** Basic settings for the hose timer
2. **Left Zone & Right Zone**
3. **Next Plan Time & Last Water Usage**
4. **Soil temperature & Moisture:** Display soil data if you add a paired RainPoint WiFi Soil Meter
5. **Plan:** Create and manage watering plans

6. **Manual:** Manual watering in Irrigation, Interval(Misting), Cycle & Soak mode
7. **Charts:** Water Consumption Bar Chart
8. **Event:** View execution history for the past year

5.2 Basic Settings

Find the icon   on the top right corner of the Device home page to "Settings" page.

Device Name


Edit the name of the timer

Device Information

Check Device ID, model #, battery level and firmware version

Device Replacement

Replace the timer with a new one while keep the irrigation plans and sensor data record from the old timer

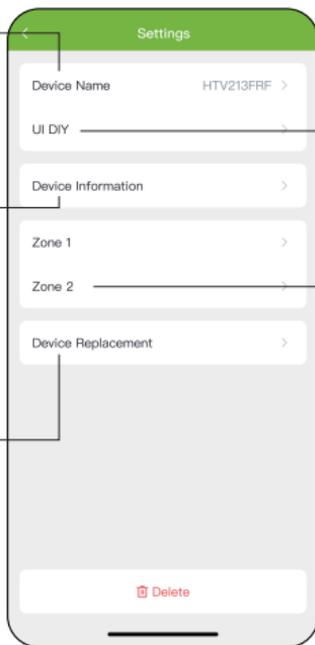

UI DIY

Choose front color & background picture

Zone 1/Zone 2

Detailed zone settings

Zone settings

Description

Edit the name of the zone

Intelligent Plan


Enable to display recommended values for irrigation duration and frequency based on your local climate data

Default Duration Time

Set a default watering duration for manual irrigation from 1min to 12 hrs as desired

Water Usage Correction

Manual calibration in case of inaccurate water consumption

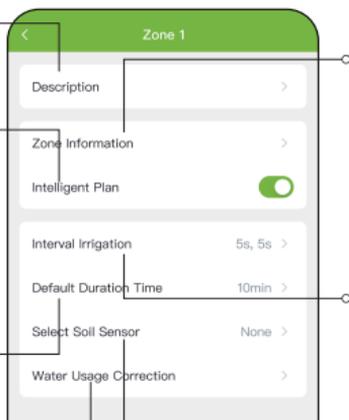

Zone Information

Edit information notes for the zone (e.g. soil type in the area, planted vegetation type, sprinkler type, etc.)



Interval Irrigation

Set the valve Run Time and Interval for the manual interval irrigation

Select Soil Sensor

Choose RainPoint smart soil sensor you would like to connect to the timer

Tips: After enabling Intelligent Plan, the recommended values will be displayed as shown on the right.

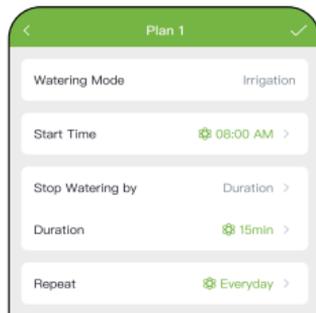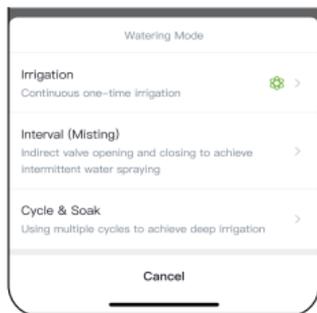


5.3 Plan Setting

Select **Plan**  and start to create a new auto-watering plan.

Rain Delay

The timer will skip all plans during the selected period (24/48/72 hrs) to prevent overwatering. Apply on rainy days or other weather conditions that cause high soil moisture.

 Turn the plan on or off

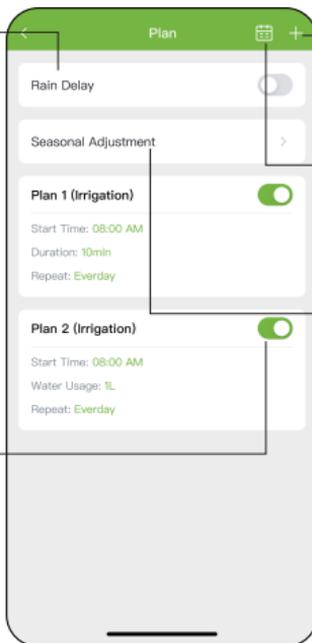

 Add a new irrigation plan

 Timetable overview of all plans for the next 3 years

Seasonal Adjustment

Set and Adjust the water consumption of irrigation plan by percentage according to monthly seasonal climate conditions

Tips: Up to 6 plans can be created.

Watering Mode

Select an irrigation mode, Irrigation/Interval/Cycle & Soak

Start Time

Set the time that the plan starts

Duration

Set a watering duration for the plan from 1min to 12 hrs as desired



Stop Watering by

Select a way to stop watering, Duration or Water Usage

Repeat

Set the watering frequency for your plan

Tips:

- **Irrigation Mode:** Normal watering mode with basic start time, duration and frequency
- **Interval Irrigation Mode:** Special mist time and interval period that can intermittent quick watering
- **Cycle & Soak Mode:** Customized watering and soaking cycle times for deep irrigation and full absorption
- **Stop Watering by Water Usage:** Once either the Water Usage limit or the Maximum Watering Time is reached, irrigation will automatically stop

5.4 Charts

Select **Charts** to review your timer's daily or monthly water usage.



5.5 Manual

5.5.1 Irrigation

Select **Irrigation** on **Device Home Page** to manually start a temporary plan with a settable time.

5.5.2 Interval (Misting)

Select **Interval** to manually start a temporary misting plan. Set a specific set of short interval valve opening and closing times to achieve intermittent water spraying.

5.5.3 Cycle & Soak



Select **Cycle & Soak** to manually initiate a temporary intermittent cycling plan for deep irrigation.

Note: If a plan is running when manual watering is started, or if a plan is about to run during the current manual period, it will be skipped this time.

6. Smart Page


Set up customized **Smart Scenes** according to your preferences and needs to build RainPoint's device IoT system. In this way, your hose timer will automatically adjust watering plans and send various notifications based on the plants' environment.

Follow the in-app instructions to complete **Smart Scene** settings.

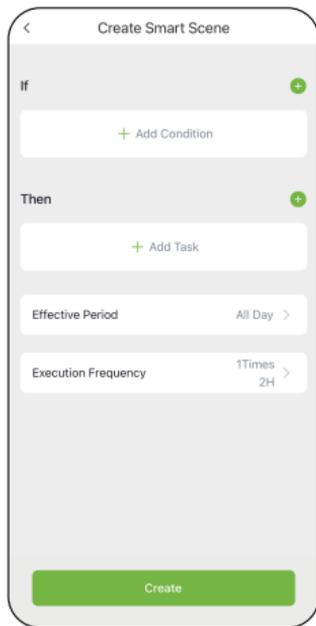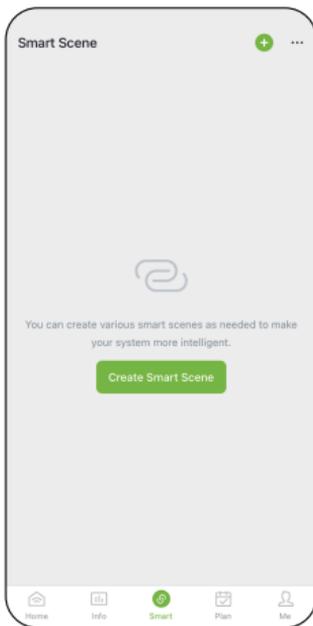

Tips:

- **Smart Scene Operation logic:** "If" selected condition is triggered, "Then" execute the specified task.
- Up to **5 conditions** and **5 tasks** can be added.
- In **Time** condition pane, **Execution Time** can be set to the sunrise/sunset time at your location (based on in-app weather forecast).
- **Conditions Trigger Relationship Setting:** Touch the icon  below **If**. Here you can select the type of trigger relationship between multiple conditions.

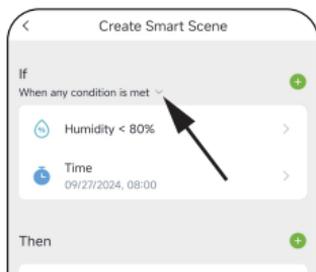

- Tap the icon  on the upper right corner of **Smart Page**, and tap **Manage** to delete scenes.
- Tap the icon , tap **Logs** to view execution history.

7. Troubleshooting

| Problem | Possible Factors | Some Solutions |
|-----------------------------|---|--|
| Can't turn on/off the valve | <ul style="list-style-type: none">• Low battery.• Impurities in water inlet.• Unstable network or delayed response. | <ul style="list-style-type: none">• Replace new batteries.• Regularly clean the filter port of impurities to avoid disruptions in use.• Wait a while and try again. |
| Inaccurate water flow meter | <ul style="list-style-type: none">• Inaccurate statistics due to tilted mounting angle.• Low or fluctuating water pressure from the tap. | <ul style="list-style-type: none">• The water timer needs to be installed vertically to the ground. It is recommended not installed at an angle to avoid affecting the measurement of water flow data.• Normal error range of water flow measurement is $\pm 5\%$. |
| Timer can't connect | <ul style="list-style-type: none">• Unstable WiFi network.• Long distance from the hub.• Timer not in pairing state. | <ul style="list-style-type: none">• Check if the WiFi network devices are working properly.• Keep close to hubs and routers when connecting the timer.• Re-pair the timer: Press and hold Operation Button (L) until the red light flashes rapidly to indicate pairing. (Or remove the device from the home page and reconnect.) |

| Problem | Possible Factors | Some Solutions |
|---------------------------|--|--|
| Hub can't connect | <ul style="list-style-type: none"> • Not using 2.4GHz WiFi. • Incorrect WiFi password. • Distance between sensor and hub is too far. | <ul style="list-style-type: none"> • Confirm 2.4GHz WiFi connection. • Confirm that the WiFi password you entered is correct. • Stay closer to the hub while connecting. |
| Plan not executed on time | <ul style="list-style-type: none"> • Water inlet filter is clogged with impurities. • Rain Delay is on. • In a low power state, the timer goes into a low power protection state and does not execute the schedule. The parameter of irrigation duration/period is set to null. | <ul style="list-style-type: none"> • Inlet impurities need to be cleared regularly so that they do not clog up and interfere with irrigation plans. • Check if the rain delay parameter is set. • Replace fresh batteries. • Check that the irrigation duration/period parameter is set. |

8. Precautions

- Please make sure to use 2.4GHz band WiFi to connect this timer.
- Please install your timer vertically to avoid device body damage and inaccurate water flow measurements.
- Under freezing temperatures, timers should be removed from the spigot and stored indoor to avoid potential freezing damage.
- Please clean filters regularly and replace if it is worn in order to prolong working life of timer.

9. Warranty Policy

RainPoint provides a 1-year limited warranty on this product against manufacturing defects in materials and workmanship.

10. FCC Statement (FCC ID: 2AWDBHTV213FRF)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

FCC Warning: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.


11. Customer Support

Please subscribe to our channel: **RainPoint** on YouTube for tutorial videos.



Or scan the QR code to visit the **RainPoint** channel on YouTube.

If the app and the user manual don't have what you're looking for, and need some help about **RainPoint**, please contact us by **LOT NO.:** XXXXXX (on the back of the device)



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

Need Help ?

Scan the QR code for more help.



or Email:

support@rainpointonline.com