

Iron/Tones®

Top-/Under-Mount Kitchen Sink K-6625

Features

- 33-inch minimum base cabinet width for top-mount installation.
- 36-inch minimum base cabinet width for undermount installation.
- Large/medium bowls.
- 9" (229 mm) depth provides generous workspace.
- No faucet holes.
- Smart Divide® features a lower bowl divider that increases workspace and versatility.
- Versatile design allows large basin to be installed on the right or left.



KOHLER® enameled cast iron.

Installation

Top-mount or undermount.

Recommended Products/Accessories

K-5137 Sink Rack K-5139 Sink rack K-23726 Drain treatment K-23725 Cast iron cleaner

Optional Products/Accessories

K-11352 Disposal Flange with Stopper K-9000 P-Trap 1411886 Undermount sink kit 23"



Codes/Standards

ASME A112.19.1/CSA B45.2

KOHLER® Enameled Cast Iron Kitchen Sink Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


olor	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
	47	Almond
	FD	Cane Sugar™
	NY	Dune
	FE	Frost
	95	Ice™ Grey
	G9	Sandbar
	K4	Cashmere
	FT	Basalt
	58	Thunder™ Grey
	R1	Roussillon™ Red
	KA	Black 'n Tan
	FP	Caviar
	7	Black Black™
	GRL	Grey Lavender
100	DGB	Indiao Blue





Iron/Tones®

Top-/Under-Mount Kitchen Sink K-6625

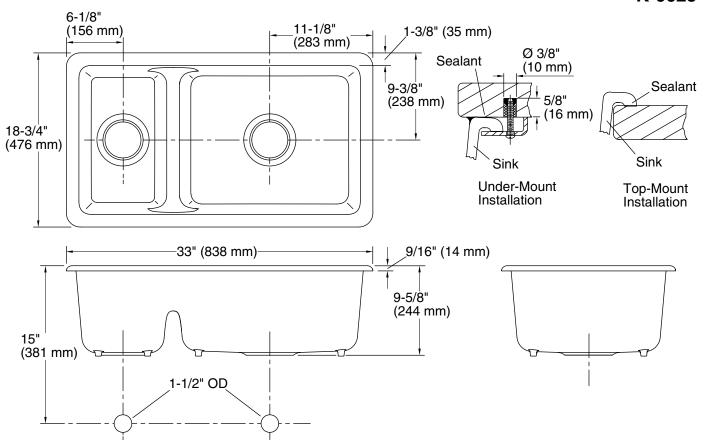

Technical Information

All product dimensions are nominal.

Bowl configuration: Off-set Large/small Installation: Top-mount, Undermount

Min. base cabinet 36" (914 mm)

width:

Bowl area (Right): Length: 19-1/4" (489 mm)

Width: 16" (406 mm) Water depth: 9" (229 mm)

Bowl area (Left): Length: 9-1/4" (235 mm)

Width: 16" (406 mm)

Water depth: 9" (229 mm)

Drain hole: 3-7/8" (98 mm)

Template: 1043168-7, required, included

Notes

Install this product according to the installation instructions.

NOTICE: The countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by the Kohler Co. (Call 1-800-4-KOHLER.) Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

