9022 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration


ASSEMBLY AND INSTALLATION

- 1. Connect the stems (15) (14)(13) (depending on desired height). Attach them to the nipple on the top of the nipple (16), then thread the stem into the swivel (11).
- 2. Thread two mounting screws (5) through the mounting bar (7) and secure with the hex nut (9).
- 3. Attach the mounting bar (7) with box screw (10) to the outlet box (1).
- 4. Pull out the outlet wire and ground wire from the outlet box $% \left\{ 1,2,\ldots ,n\right\}$

Make wire connections with wire nut (6).

- --Ribbed wire (w/o marking) or white wire from light to White wire (2) from power source.
- --Smooth wire (w marking) or black wire from light to Black wire (3) from power source.
- --Attach the ground wire (4) to mounting bar (7) with a ground screw (8).
- 5. Attach the fixture canopy to the outlet box (1), secure it with the ball nut (12).
- 6. Install bulbs: (bulbs not include)

(Don't exceed the maximum capacity recommended on the sockets).

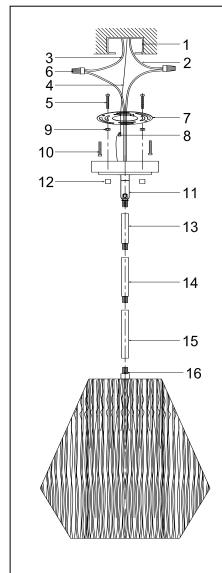

1.OUTLET BOX 2.WHITE WIRE 3.BLACK WIRE **4.GROUND WIRE** 5.MOUNTING SCREW **6.WIRE NUT** 7.MOUNTING BAR **8.GROUND SCREW** 9.HEX NUT 10.BOX SCREW 11.SWIVEL 12.BALL NUT 13.STEM 14.STEM 15.STEM 16.NIPPLE