

# Assembly Instruction Sheet #IS -8012C20C

## For Style 8012C20C

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (6) E12 Candelabra Base Bulbs 60W Maximum (Not Include).

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

### ⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture.

We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

### Package Contents

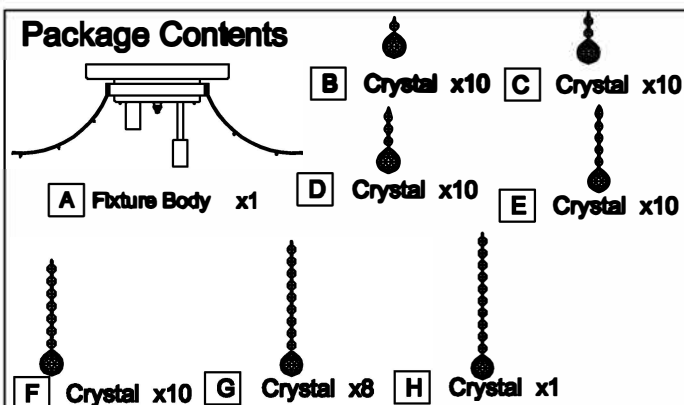

### Hardware Contents

PART	DESCRIPTION	QUANTITY
AA	Screw	4pcs
BB	Electrical Marrets	2pcs
CC	Outlet Box Screw	2pcs
DD	Mounting Screw	2pcs
EE	Crossbar	1pcs



### STEP 1 – Attach Mounting Screws, Lock Washers and Hex Nuts to Crossbar

A. Line up a set of holes on the Crossbar (EE) and Holes on the ceiling canopy. Thread Mounting Screws (DD) into the holes on the Crossbar (EE). Pass Lock Washers and thread Hex Nuts onto the Mounting Screws (DD). Hand tighten until snug.

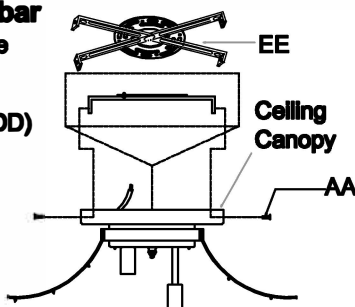


Figure 1

### STEP 2 – Attach Crossbar to Outlet Box.

A. Pass the supply wires through the Crossbar (EE). Attach the Crossbar (EE) to the Outlet Box (CC) with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.

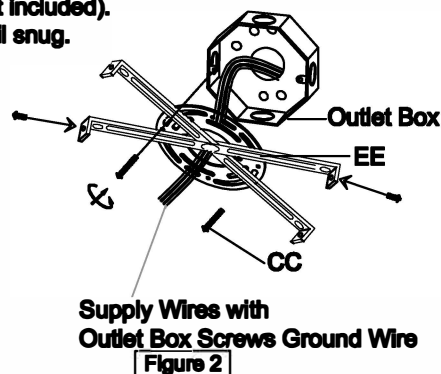


Figure 2

### STEP 3 – Fit Ceiling Canopy to Crossbar Assembly.

A. Fit the ceiling canopy to Mounting Screws (DD) and secure with Screw (AA). Note: The ceiling canopy should be snug against the ceiling and the Screw (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Crossbar (EE) until the correct length is achieved. Once the ceiling canopy is secure, remove the Screw (AA) and ceiling canopy and proceed to Step 4.

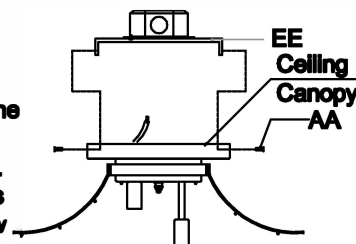


Figure 3

#### STEP 4 - Wire Connections .

- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

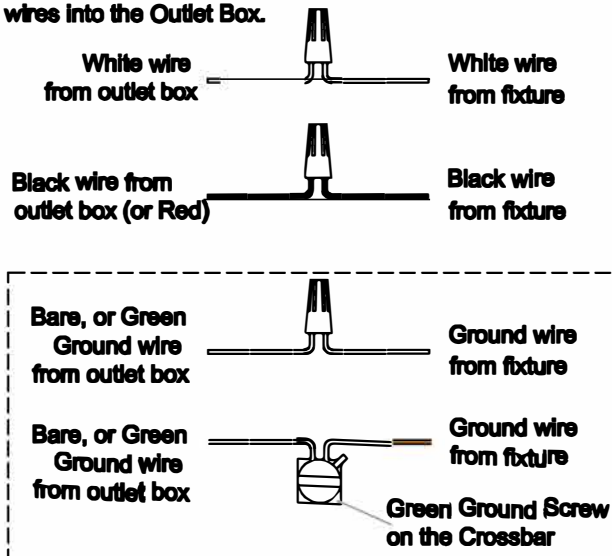


Figure 4

#### STEP 5 - Install Ceiling Canopy to Ceiling .

- A. Carefully tuck all wires into the outlet box and position the ceiling canopy of the Fixture Body (A) over the outlet box. Align the holes in the ceiling canopy with the Mounting Screws (DD). Secure with Screw (AA) and hand tighten until snug.


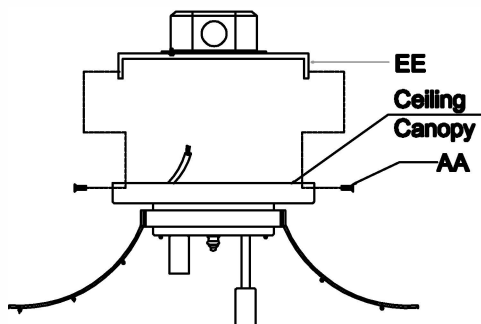


Figure 5

#### STEP 6 - Install Crystals and bulb.

- A. Install bulbs into sockets and screw snugly into place.  
B. Please put the crystal (B) (C) (D) and (E) to the Fixture Body (A) .

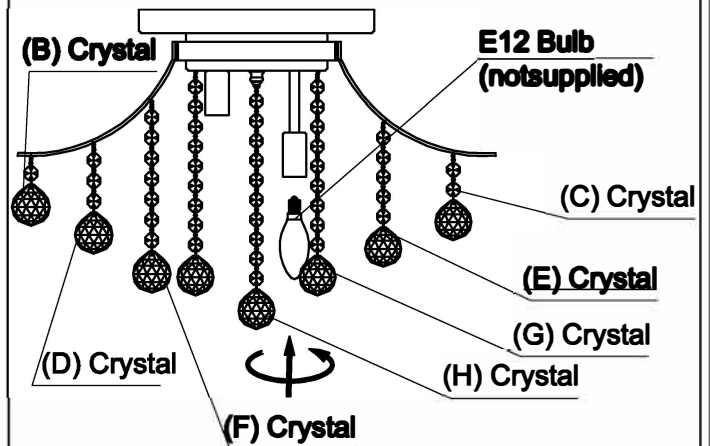

<p><b>B</b></p> <p>14mm*1PCS 40mm*1PCS 10PCS</p>	<p><b>C</b></p> <p>14mm*2PCS 40mm*1PCS 10PCS</p>
<p><b>D</b></p> <p>14mm*3PCS 40mm*1PCS 10PCS</p>	<p><b>E</b></p> <p>14mm*5PCS 40mm*1PCS 10PCS</p>
<p><b>F</b></p> <p>14mm*7PCS 40mm*1PCS 10PCS</p>	<p><b>G</b></p> <p>14mm*9PCS 40mm*1PCS 8PCS</p>
<p><b>H</b></p> <p>14mm*10PCS 40mm*1PCS 1PCS</p>	

Figure 6