

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver



Pliers




Wire strippers


HARDWARE INCLUDED



Fixture



Cage



Mounting Unit



Ball Nuts





Mounting Screws



Wire Nuts

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


EXPLODED PARTS

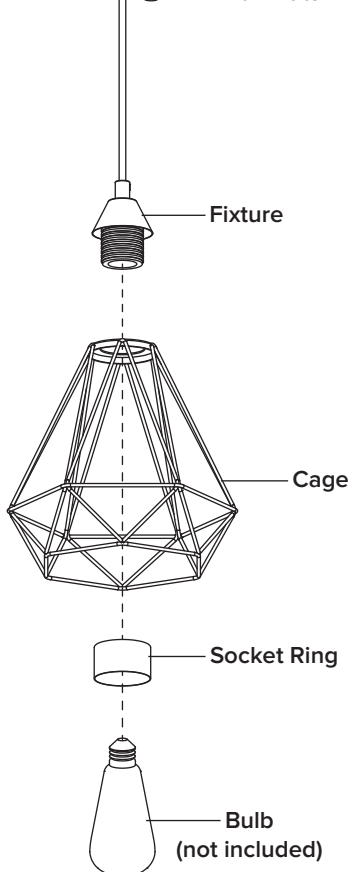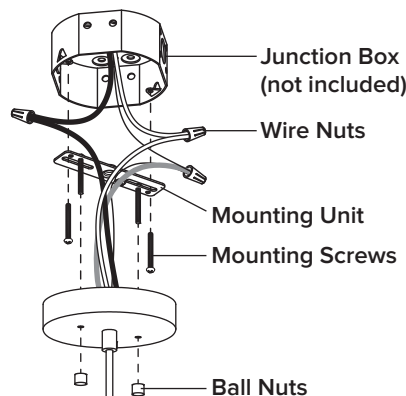

INSTALLATION


STEP 1

Unscrew the **ball nuts** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).

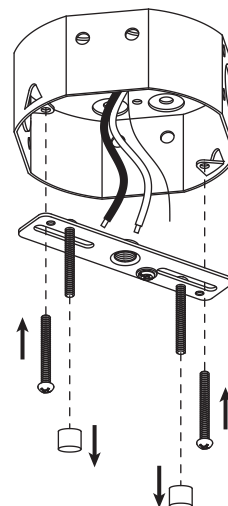

STEP 2

Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied **wire nuts**. Secure with electrical tape.

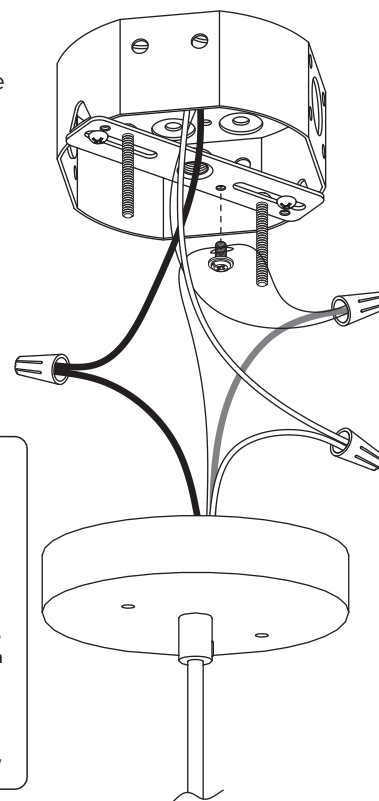

Black or Red wire
(live wire)
from the junction box

White wire
(neutral wire)
from the junction box

Bare or Green ground wire
from the junction box



Black wire from the
fixture identified
with the label "L"

White wire from the
fixture identified
with the label "N"

Ground wire from the
Fixture identified with
the label "G"

Bare ground wire
from the Fixture

*Green Ground Screw


*Sealing tape
(not included)

ASSEMBLY INSTRUCTIONS (INSTALLATION)

STEP 3


Attach the **fixture** to the **mounting unit** through screws holes as shown, and secure it with **ball nuts**.

*Junction Box
(not included)

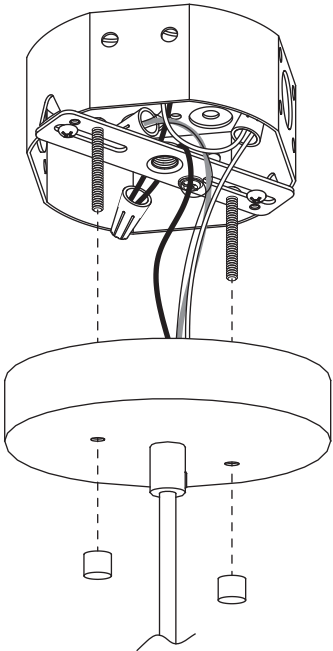

STEP 4

Remove the **socket ring** from the socket.
Use the **socket ring** to attach the **cage** to the **fixture**.

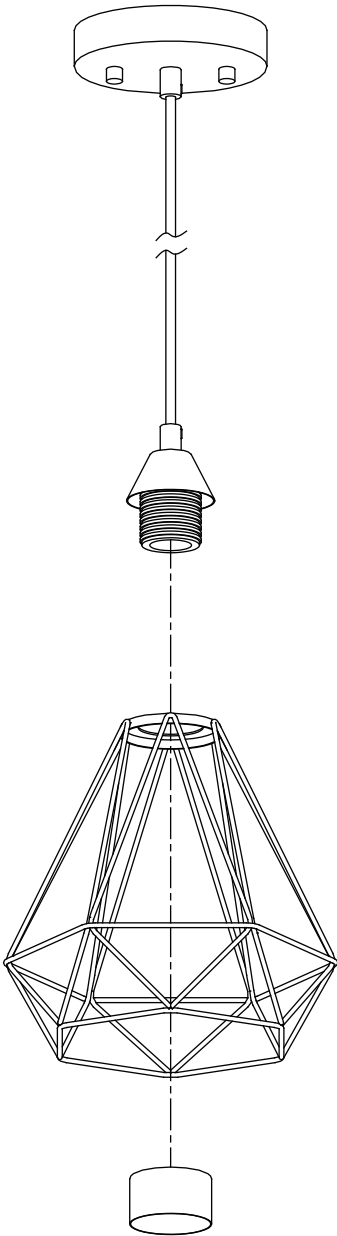

STEP 5

Install bulb (not included)

