

SHOWER SYSTEM FAUCET

Installation instruction

Boyet Living

H1107

CH / BN / MB / BG / ORB

Website: www.boyelliving.com

Customer Service: : 323-982-8955


Email: service@boyelliving.com



1. INSTALLATION PRECAUTIONS

1. When you open the product packaging, please check the product and accessories at first. If there are any discrepancies, please contact us promptly. We will provide you with a satisfactory solution.
2. The hot and cold water supply pipe of the valve must be properly connected. When facing the front of the valve, the hot water supply is on the left and cold water supply is on the right. Incorrect connection will cause permanent damage to the cartridge.
3. If the accessories to be changed without affecting the use, we will not make a prior notice.
4. The impurities in the water supply pipe must be cleared before installation to avoid blockage.
5. The water pressure of the faucet is 0.05MPa-1.0MPa (including cold water and hot water Pressure). Applicable water temperature range: 39°F-194°F.

2. PREPARATION BEFORE INSTALLATION

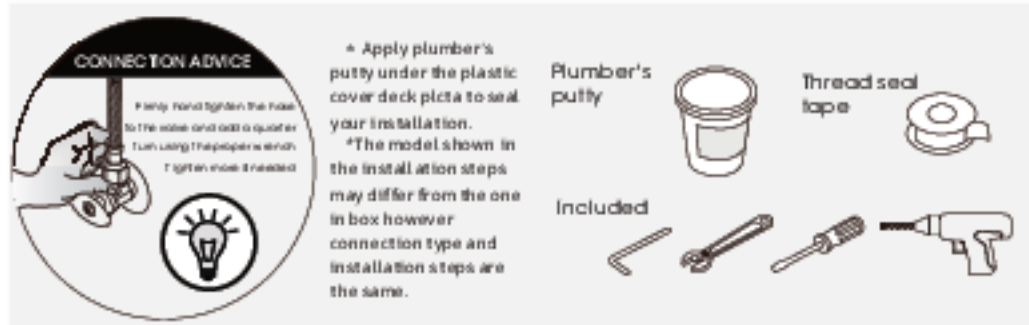

3. CONCEALED FAUCET ACCESSORIES LIST



No.	Description
A	Shower Head
B	1/2"x2" NPT Nipple
C	Escutcheon
D	Shower Head
E	Shower hand
F	Diverter Body & Shower Pipe
G	Mounting Bracket
H	Stainless Steel Hose
I	Mounting Screw
J	Anchor

CARE INSTRUCTIONS

Rinse the product with clear water. Dry the product with a soft cloth.

DO NOT:

Use abrasive cleansers, cloths, or paper towels. Use any cleaning agents containing acid, polish, wax, alcohol ammonia, bleach, solvent or any other corrosive or harsh chemical cleansers.

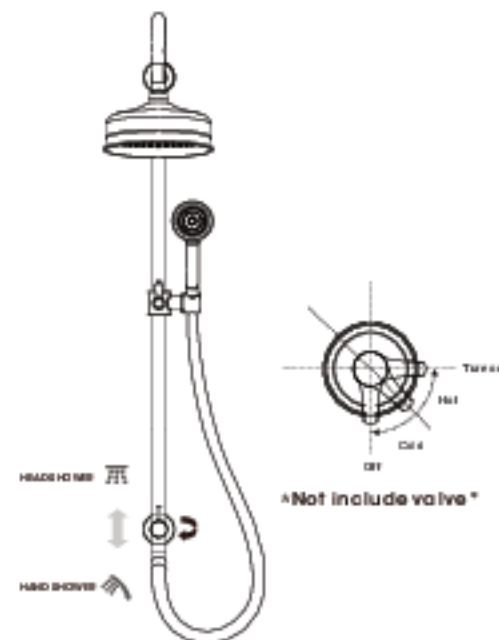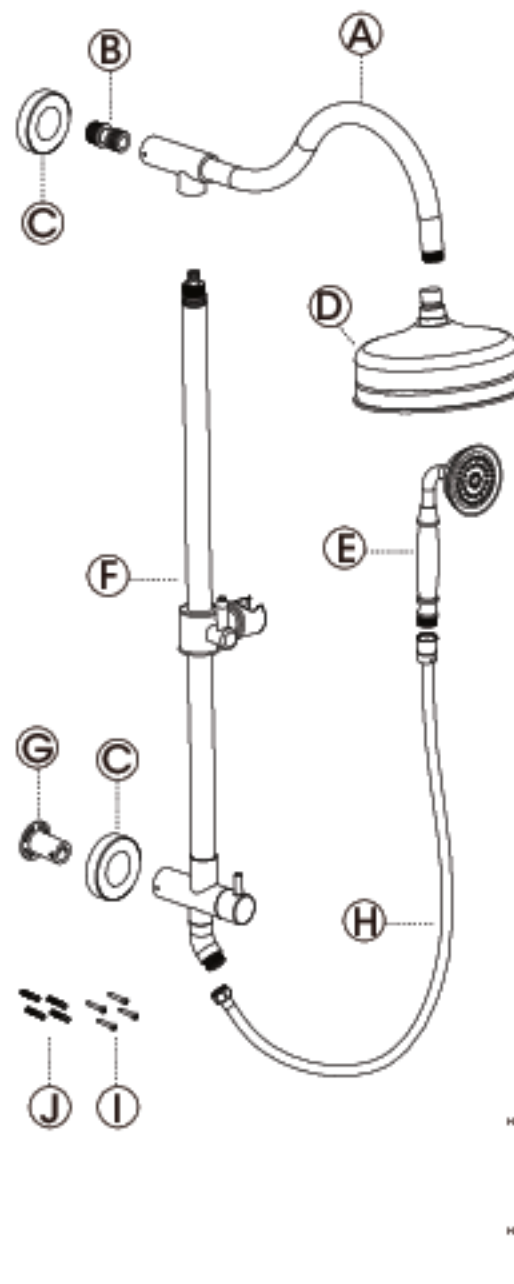

Not include valve