


Project		Catalog #		Type	
Prepared by		Notes		Date	

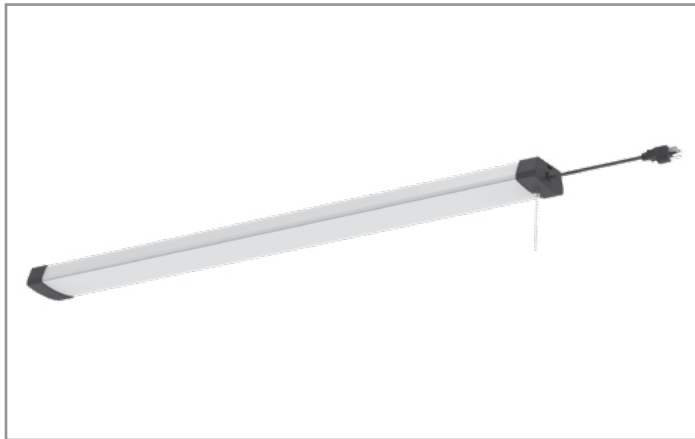

Metalux

5,000 Lumen Shoplight

LED Shoplight

Typical Applications

Workshops • Barns • Garages • Storage Rooms

Interactive Menu

- Order Information page 2
- Product Warranty

Product Certification




Product Features



Top Product Features

- Delivers over 5000 lumens at 41 watts
- Fixture-to-fixture linkability (up to 4)
- Replaces up to 3-lamp T8 fluorescent (96W)
- Frosted lens provides a wide, even light distribution
- Ideal for garages, barns, workshops and open areas

Dimensional and Mounting Details

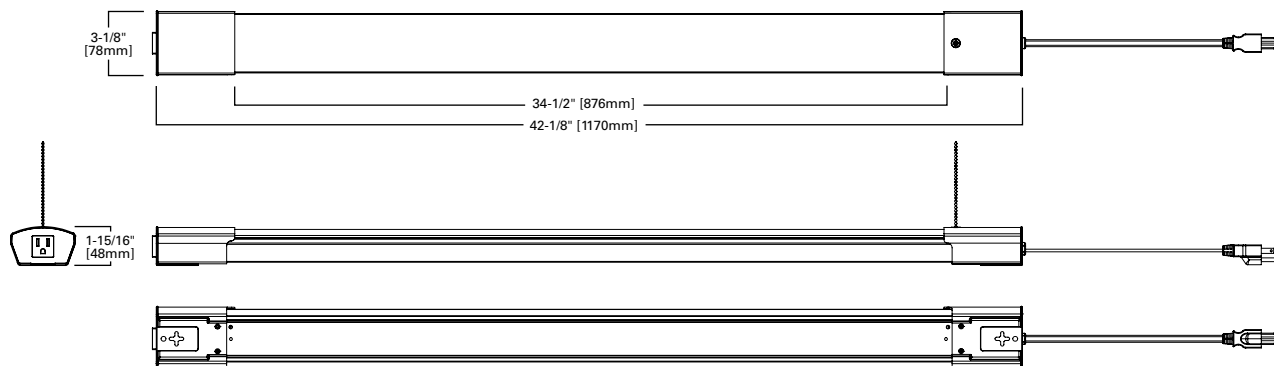

Order Information

Catalog Number	Lumen	Wattage	UPC	Unit Weight	Pallet Qty	Master Pack Qty
4SHP5040RL	5290	41W	080083250349	2.4 lbs.	120	6

Product Specifications

Construction

- Metal housing with high impact plastic end caps
- Frost polycarbonate white lens

Mounting

- Suspension mount using included 12-inch chain and S-hook
- Surface mount using included snap-on brackets
- Mounting hardware, wall anchors and eyebolts included

Linkable Outlet

- Link up to 4 fixtures together using 120V outlet

Electrical

- 120V, FCC rated Class B, non-dimming driver
- 5ft 3-blade grounded cord and plug included
- On-off pull chain for easy operation

Optical Shielding

- UV-stabilized lens
- Wide distribution diffuse lens for greater work coverage and glare control

LED and Light Engine

- 4000K CCT and minimum 80 CRI
- L70 at 50,000 rated life-hours (TM-21), or up to 34 years at 4 hrs/day.
- LED modules comply with IESNA LM-79 and LM-80 standards

Compliance and Certifications

- ETLus listed for dry location
- ENERGY STAR® Certified luminaire - consult ENERGY STAR® Certified Product List
- FCC part 15 Class B (residential) compliant
- RoHS compliant
- Operating temperature of -20°C to 40°C

Limited Product Warranty

- 5-year limited warranty