

INSTALLATION GUIDE  
ZPJSFL5206DCBXE26

# Cautions and Warnings

• **READ THIS ENTIRE MANUAL CAREFULLY BEFORE BEGINNING INSTALLATION. SAVE THESE INSTRUCTIONS.**





















- Use only Exbrite replacement parts.
- To reduce the risk of personal injury, attach the fan directly to the support structure of the building according to these instructions, and use only the hardware supplied.
- To avoid possible electrical shock, before installing your fan, disconnect the power by turning off the circuit breakers to the outlet box and associated wall switch location. If you cannot lock the circuit breakers in the off position, securely fasten a prominent warning device, such as a tag, to the service panel.
- All wiring must be in accordance with national and local electrical codes and ANSI/NFPA 70. If you are unfamiliar with wiring, use a qualified electrician.
- To reduce the risk of personal injury, do not bend the blade attachment system when installing, balancing, or cleaning the fan. Never insert foreign objects between rotating fan blades.
- To reduce the risk of fire, electrical shock, or motor damage, do not use a solid-state speed control with this fan. Use only Exbrite speed controls

**NOTE:** The important safety precautions and instructions appearing in the manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense and caution are necessary factors in the installation and operation of this fan.

## Parts Inventory

Carefully open the packaging. Remove items from Styrofoam inserts. Remove motor housing and place on carpet or Styrofoam to avoid damage to finish. Check against parts inventory that all parts have been included.


- Downrod and hanging ball

		 x4  x4  x2  x7  x10  x10  x5  <b>Balance pieces x1</b>
Canopy x1	Remote control x1	Spiral package
		
Hanger bracket x1	Motor x1	Light Cup x1
		
Blade x3	Decorative covers x1	Leaves fork x3
	 <b>6" x1</b>  <b>25" x1</b>	
Glass lamp cover x1	Downrod and hanging ball	Light cover x1

## Installation Preparation

To prevent personal injury and damage, ensure that the hanging location allows the blades a clearance of 2.3m from the floor and 76cm from any wall or obstruction.

Be sure the outlet box is securely attached to the building structure and can support the full weight of the fan.

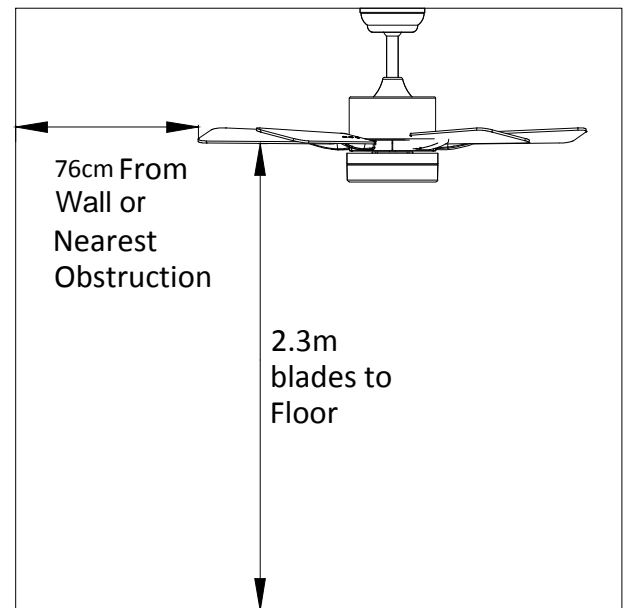


## Preparing the Fan Site

### Downrod Installation



This fan can be mounted with a downrod on a normal or vaulted ceiling. The hanging length can be extended by a longer downrod.

Installation requires these tools:

Screwdriver, flat-head screwdriver, adjustable pliers or wrench, stepladder, wire cutters, and rated electrical tape.

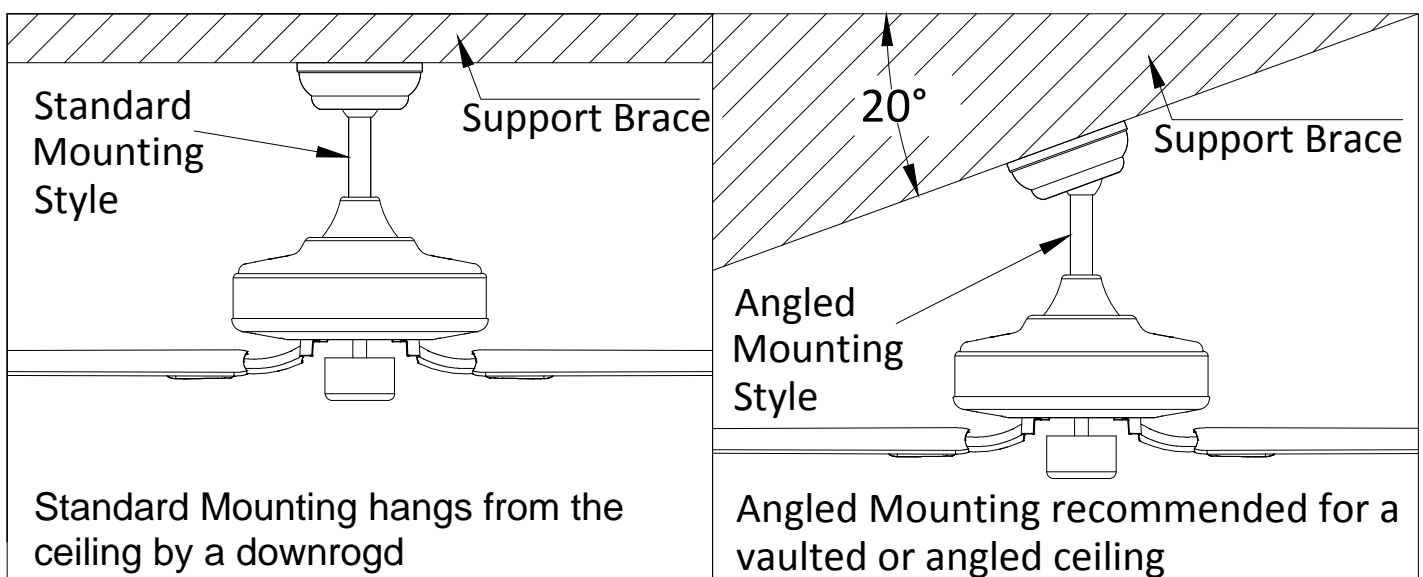


## Installing the Hanger Bracket

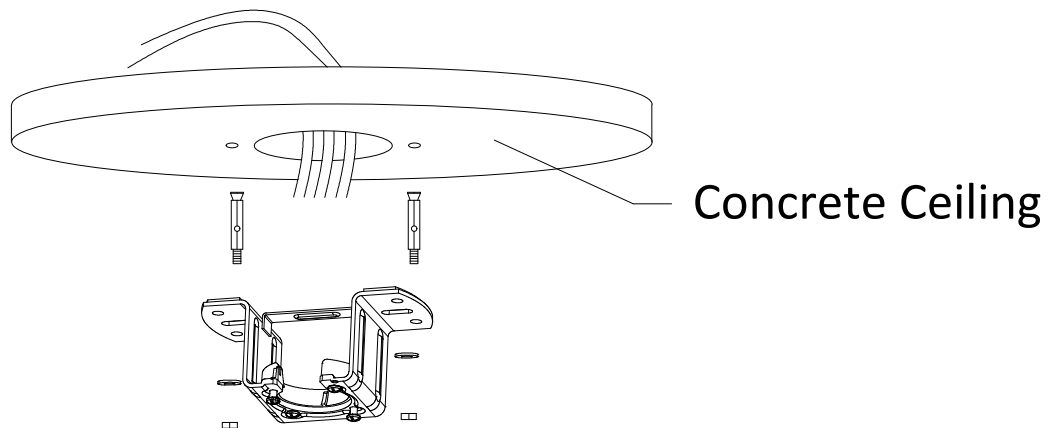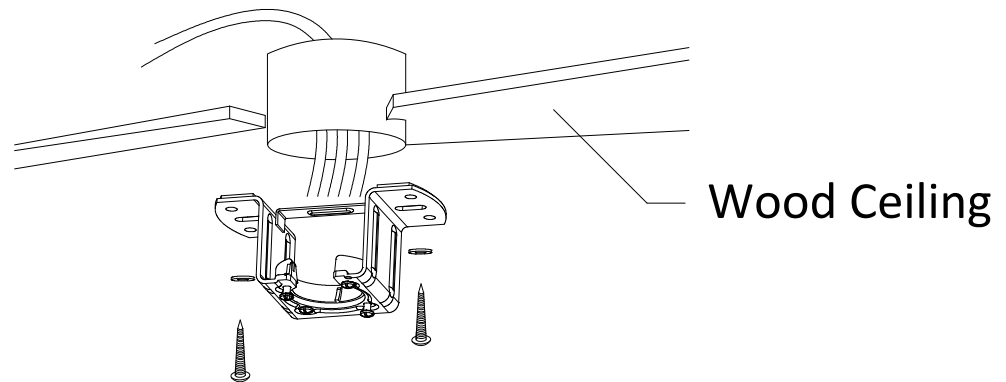

Please drill  $\phi 8\text{mm}$  hole on the concrete ceiling, and insert the bolt.  
Align bracket with the hole, then tighten with nut.

## Assembling and Hanging the Fan

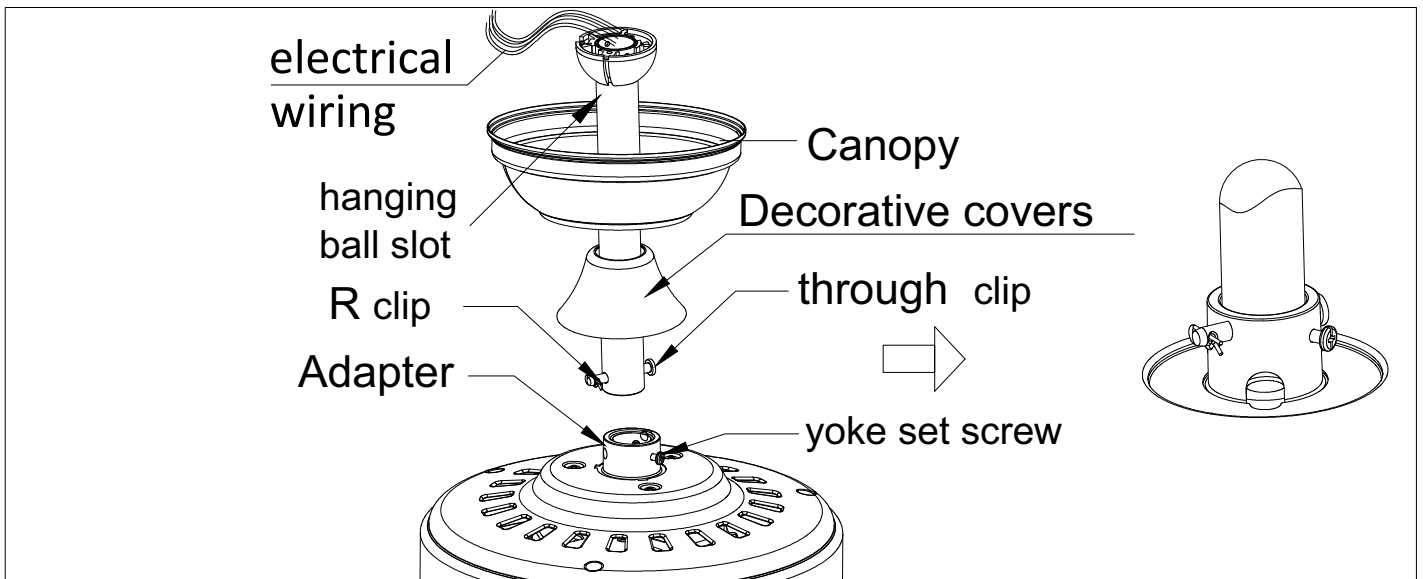

If you wish to extend the hanging length of your fan, you must remove the hanging ball from the 6 inch downrod provided to use with an extended downrod (included) . (If you wish to use the 6 inch downrod, please proceed to instructions below.)

To remove hanging ball, loose set screw on hanging ball and remove pin and clip. Lower hanging ball and remove stop pin. Slide hanging ball off the original downrod A, and slide it down the longer downrod B (the top of the downrod should be noted as having a set screw hole; use this hole when setting the set screw).

Insert stop pin into top of extended downrod and raise hanging ball.

Be sure stop pin aligns with slots on the inside of the hanging ball, tighten set screw securely.

Tip: To prepare for threading electrical wires through downrod, apply small piece of electrical tape to the ends of electrical wires-this will keep the wires together when threading them through the downrod.


Loosen yoke set screws and nut at top of motor housing. Remove pin and clip from downrod (if you have not already done so). Slide downrod through canopy.

Tread electrical wires through downrod and pull extra wire slack from the upper end of the downrod.



Place downrod into the motor housing yoke and ew-insert pin and clip that were previously removed. Tighten yoke set screws and nut securely. Lower canopy to motor housing.

## Remote control connection


DC:

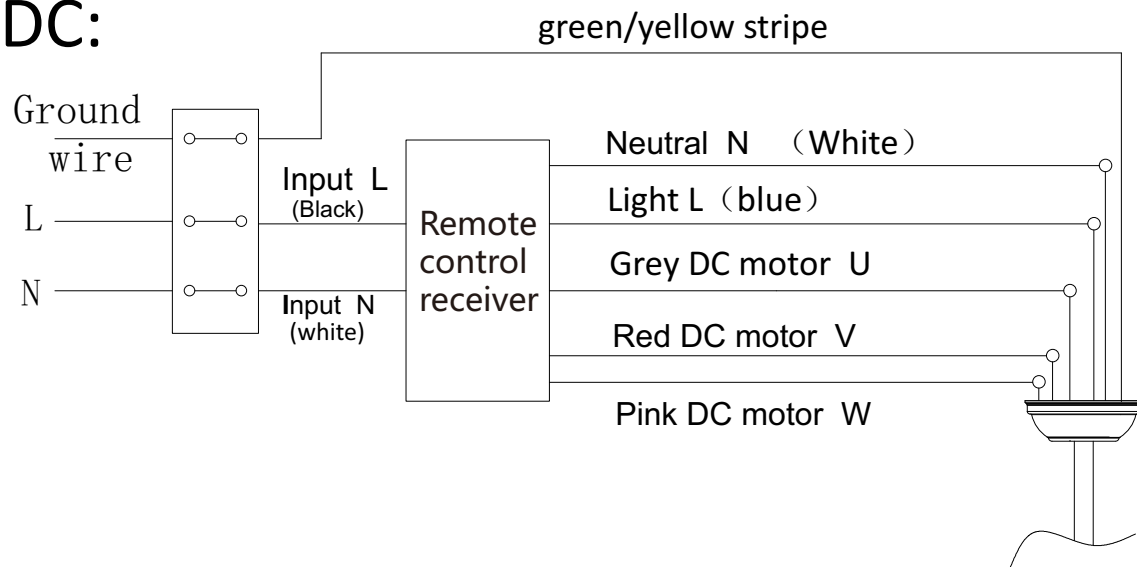

Receiver place:

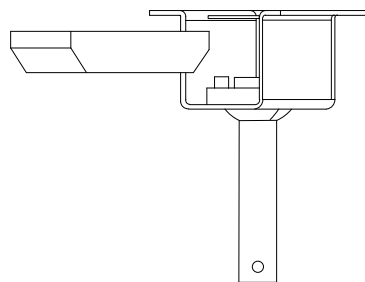

## Canopy Assembly

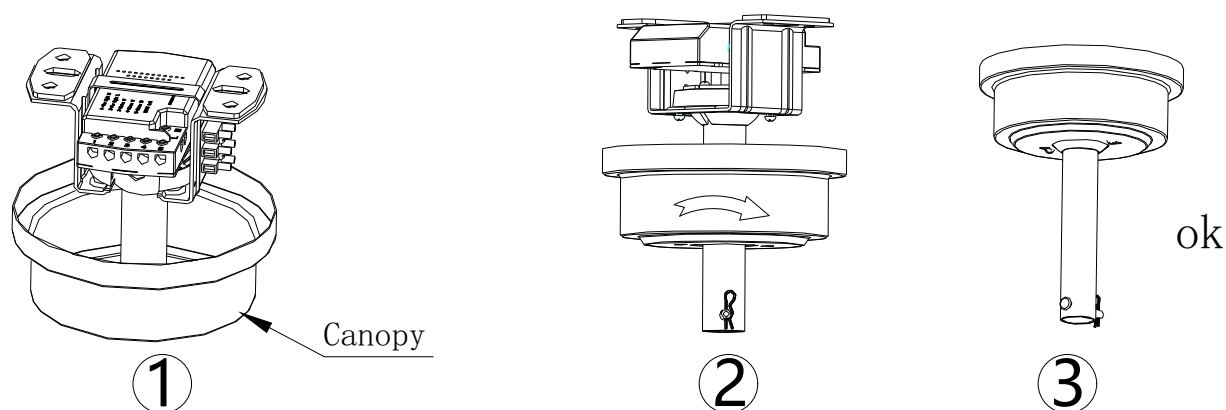


raise canopy to hanging bracket,aligning loosened screws in hanging bracket with slotted holes in canopy.Twist canopy to lock.Re-insert screws and secured all screws with screwdriver.

with hanging bracket secured to the out let box and able to support to fan,you are now ready to hang your fan. Grab the fan firmly with two hands.Slide down rod through opening in hanging bracket and let hanging ball rest on the hanging bracket.Turn the hanging ball slot until it lines up with the hanging bracket tab.

Tip:Seek the help of another person to hold the stepladder in place and to lift the fan up to you once you are set on the ladder.

## Blade Assembly

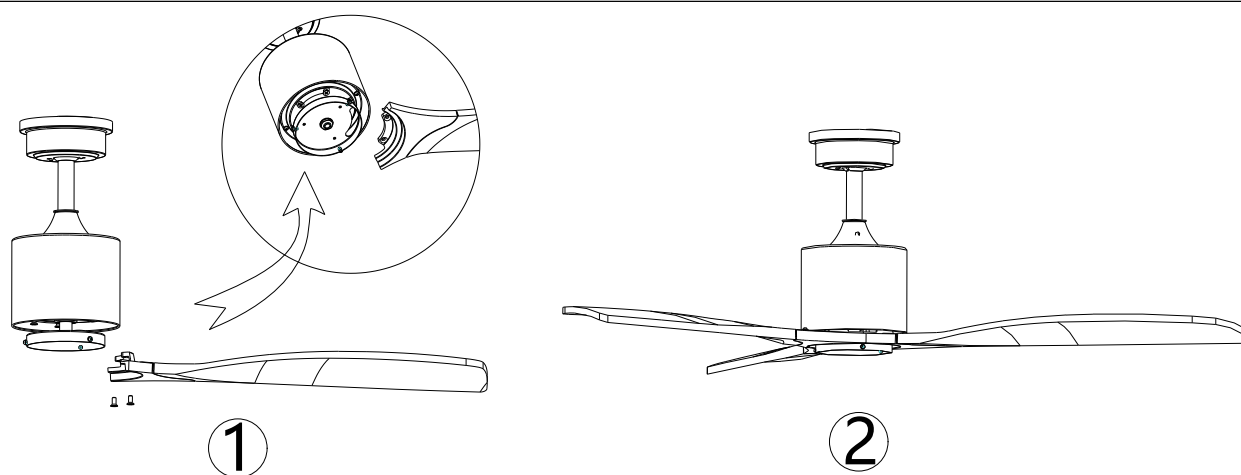


Quick installation:Place a paper pad on each screw and then secure the blade arm to the blade.

Align the blade holes with the motor screw holes, tighten the screw and secure all blades.For each blade, the motor rotates an angle to facilitate tool mounting screws.

Note: Tighten blade screws twice.




## Install the lampshade

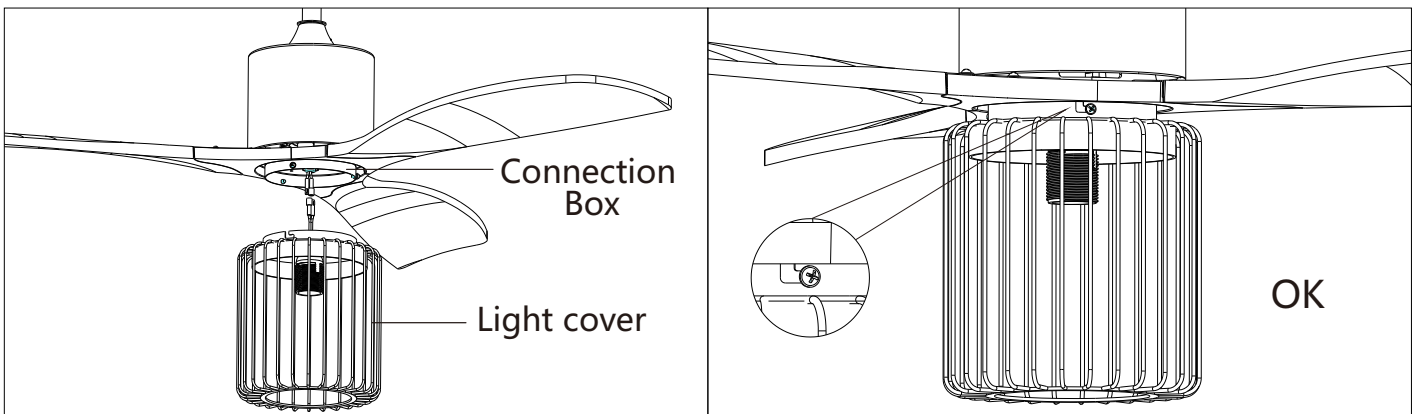

The lampshade is paired with the two lamp lines on the junction box, and pay attention to distinguish the male and the female terminals.

Remove one screw on the junction box, hang the two buckle of the lampshade on the other two screws of the junction box, then rotate the buckle in place, and finally tighten the three screws on the side.

## Install glass lampshade

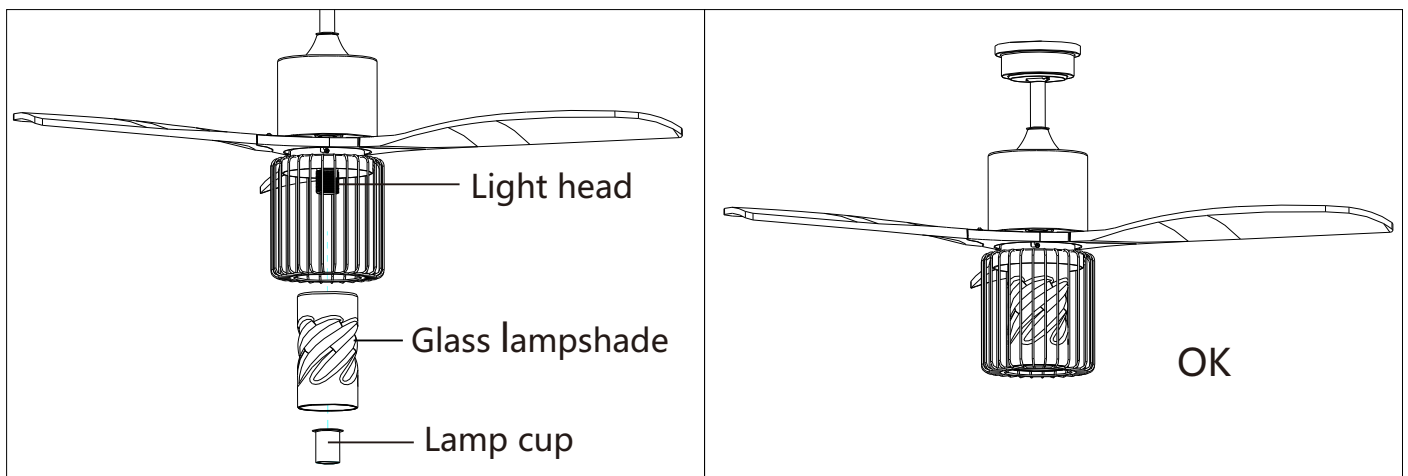

Unscrew the lamp cup from the lamp head first, then put the glass lampshade, and tighten the glass lampshade with the lamp cup.