



TV Stand

ID0140363WH








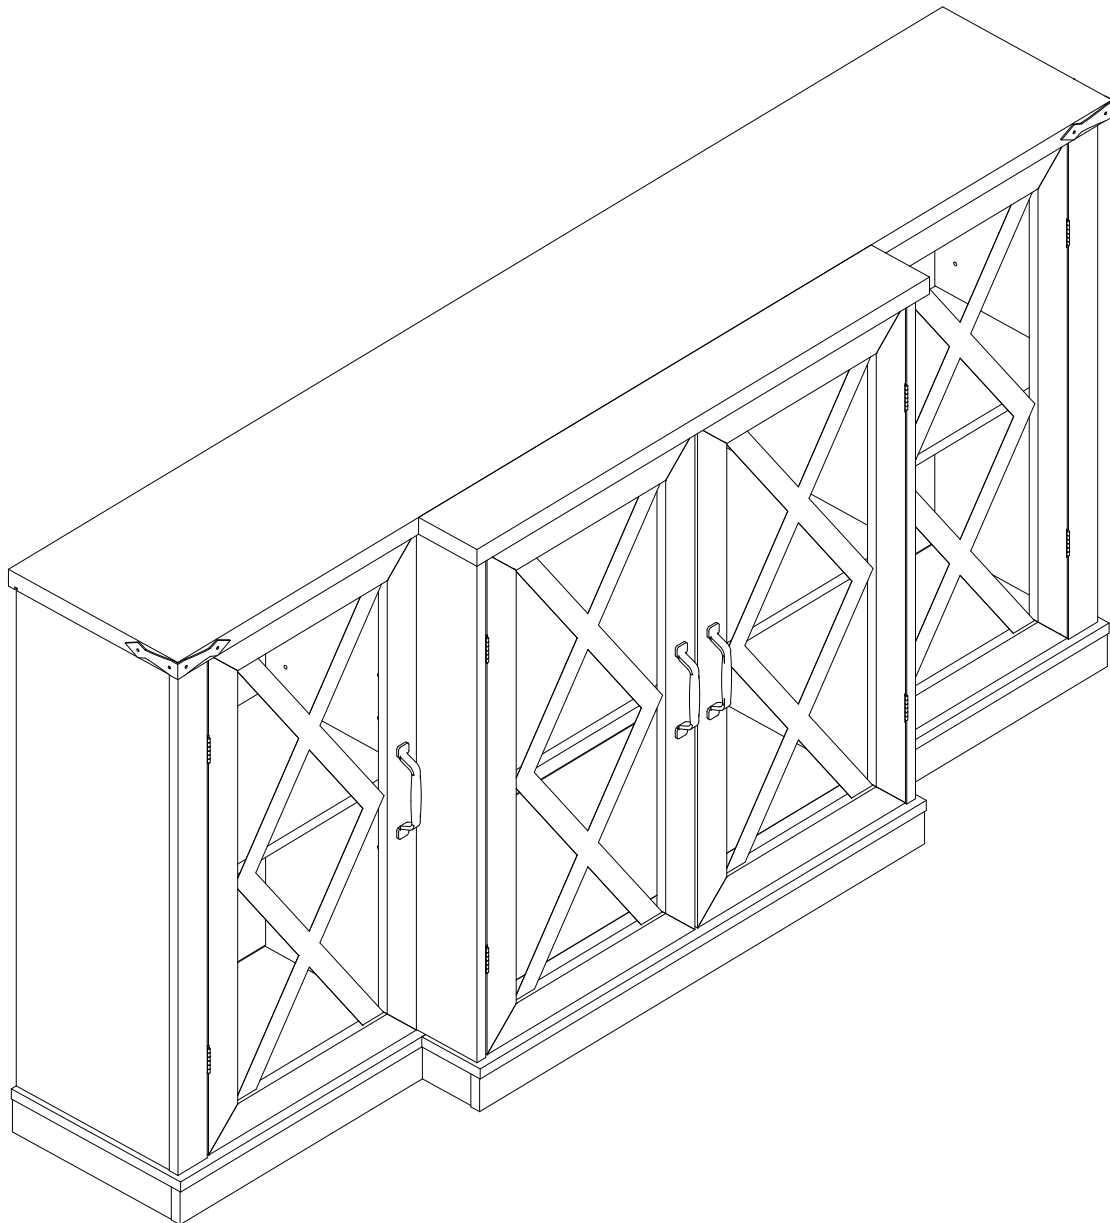


Important – Please read these instructions fully before starting assembly
Customer Service: contactus24service@gmail.com
Phone: (951) 213-4742








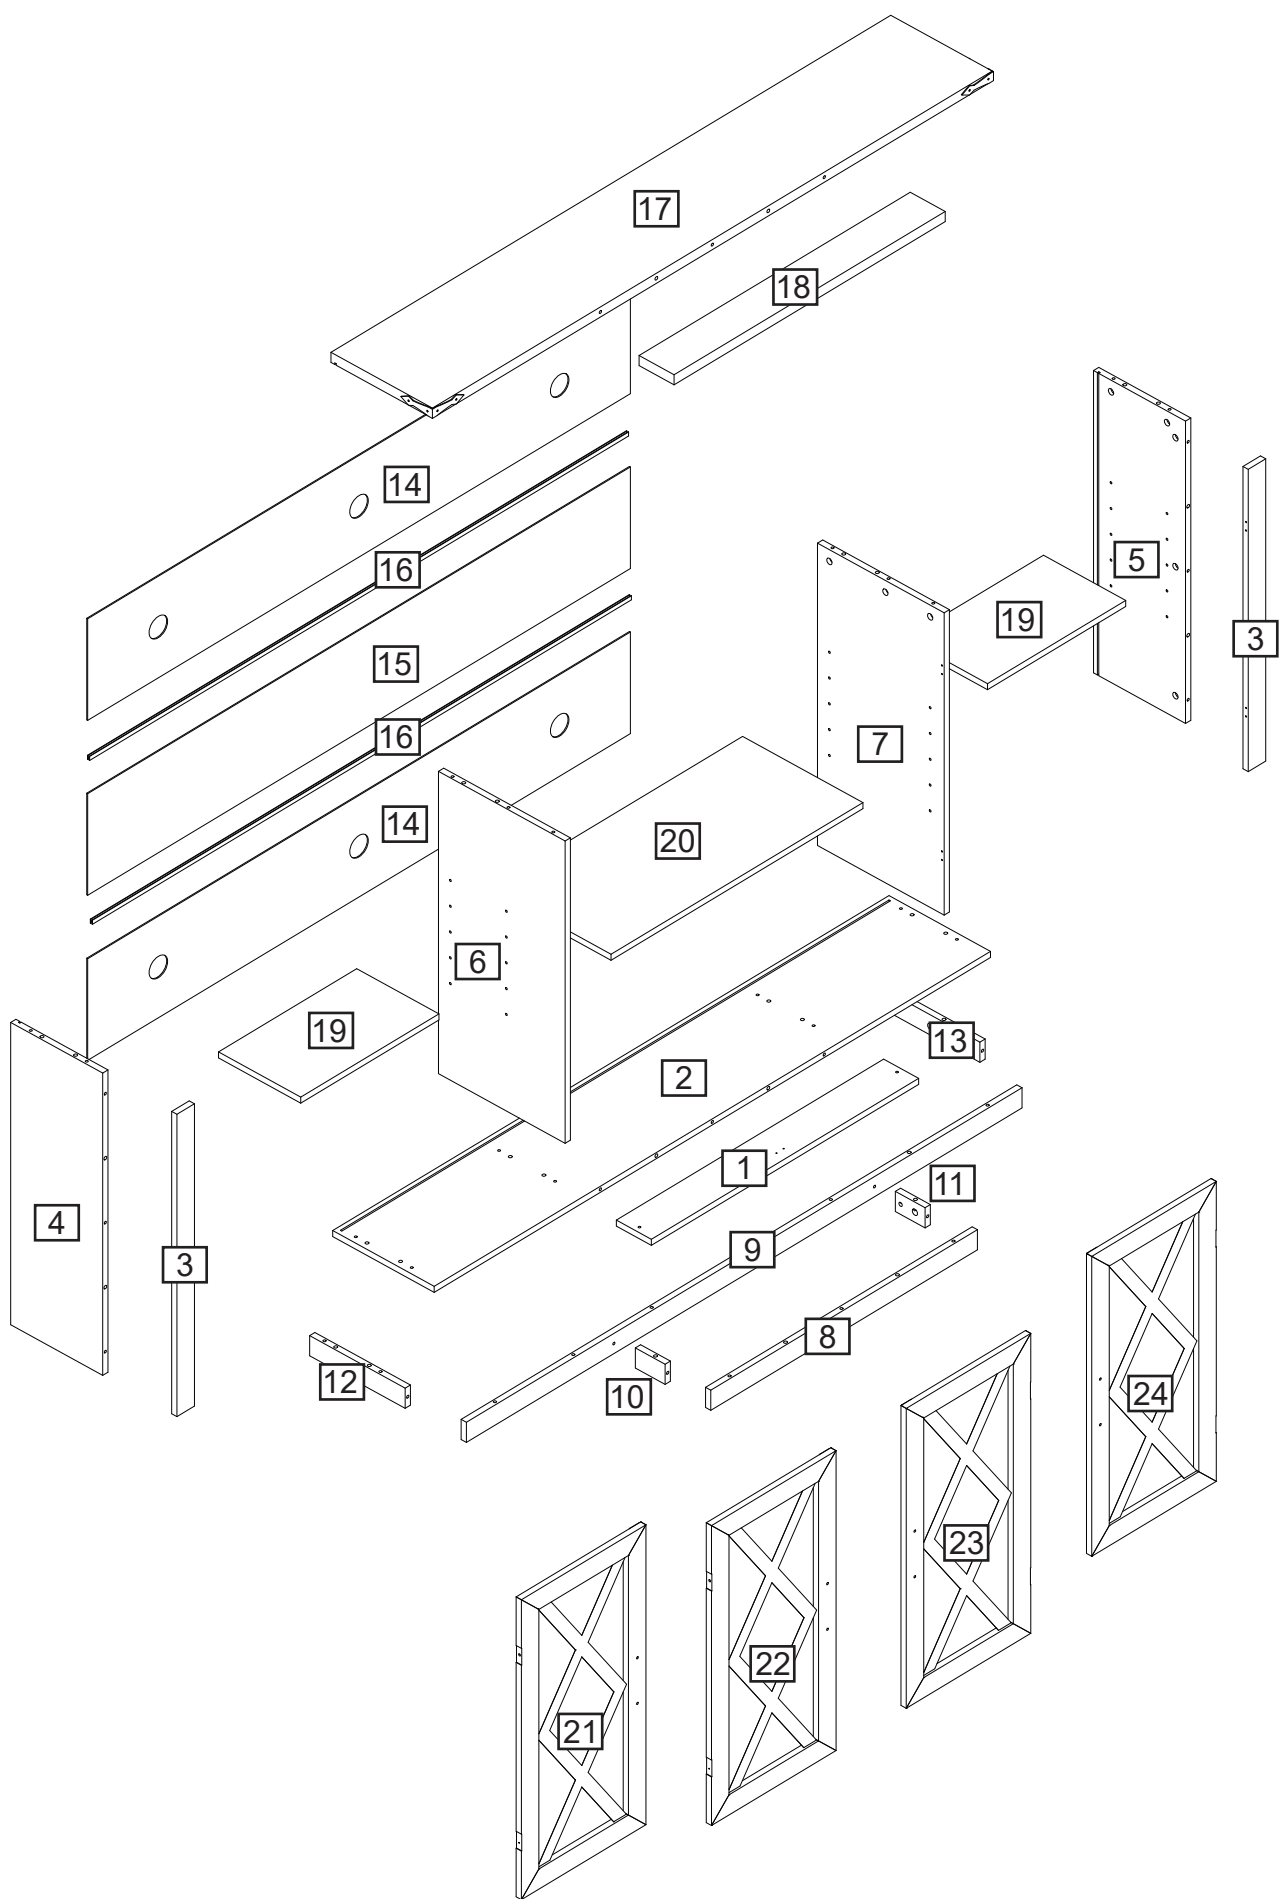


ASSEMBLY INSTRUCTIONS

Part List:









ITEM	DESCRIPTION	PART	QTY
1	Small bottom board		1
2	Bottom board		1
3	Front vertical bar of left/right		2
4	Left side board		1
5	Right side board		1
6	Left middle vertical board		1
7	Right middle vertical board		1
8	Small bottom front covering		1

Part List:

ITEM	DESCRIPTION	PART	QTY
9	Bottom front covering		1
10	Small bottom left side covering		1
11	Small bottom right side covering		1
12	Bottom left side covering		1
13	Bottom right side covering		1
14	Upper/Under back board		2
15	Middle back board		1
16	H bar		2


ASSEMBLY INSTRUCTIONS

Part List:

ITEM	DESCRIPTION	PART	QTY
17	Top board		1
18	Small top board		1
19	Left/Right shelf		2
20	Middle shelf		1
21	Left door		1
22	Middle left door		1
23	Middle right door		1
24	Right door		1


ASSEMBLY INSTRUCTIONS

Hardware List:

ITEM	DESCRIPTION	PART	QTY
A	7*39mm Male Camlock		37
B	Female Camlock		37
C	8*30mm Dowel		34
D	3.5*14mm Screw		60
E	5*40mm Screw		12
F	4*14mm Screw		4
G	Back buckle with screw		18
H	Adjustable foot		1
I	Foot nail		8
J	Handle		4
K	Angle iron		2
L	Door stopper		3
M	Shelf support pin		12
N	Hinge		8
O	Wall fixing pack		2
P	Door stopper		4
Q	Plastic nut		2
R	Door stopper		1


Step 1

Connect the male camlock as directed in the assembly instructions using a screwdriver.

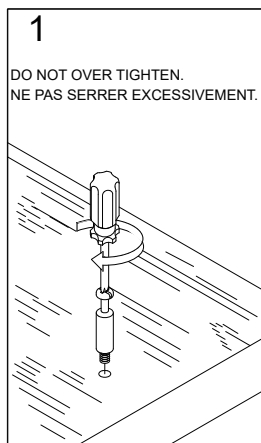

Step 2


Push the male camlock into the entry hole.

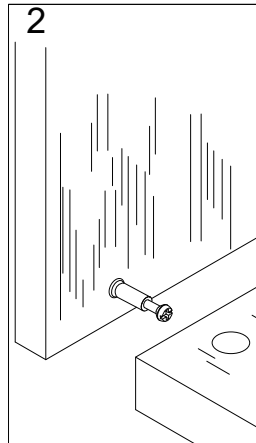

Step 3

Insert the female camlock as shown in the instructions.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.

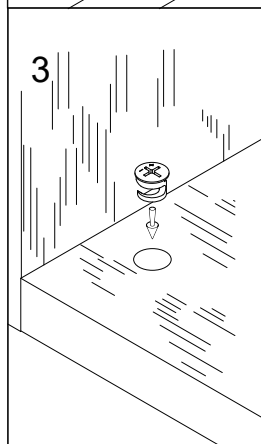


Step 4


Turn the female camlock clockwise with a screwdriver.

You should feel a click when the camlock is locked in place.


The joint is now secure.

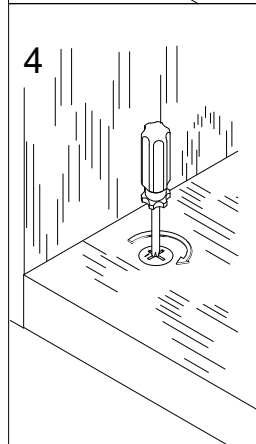




1

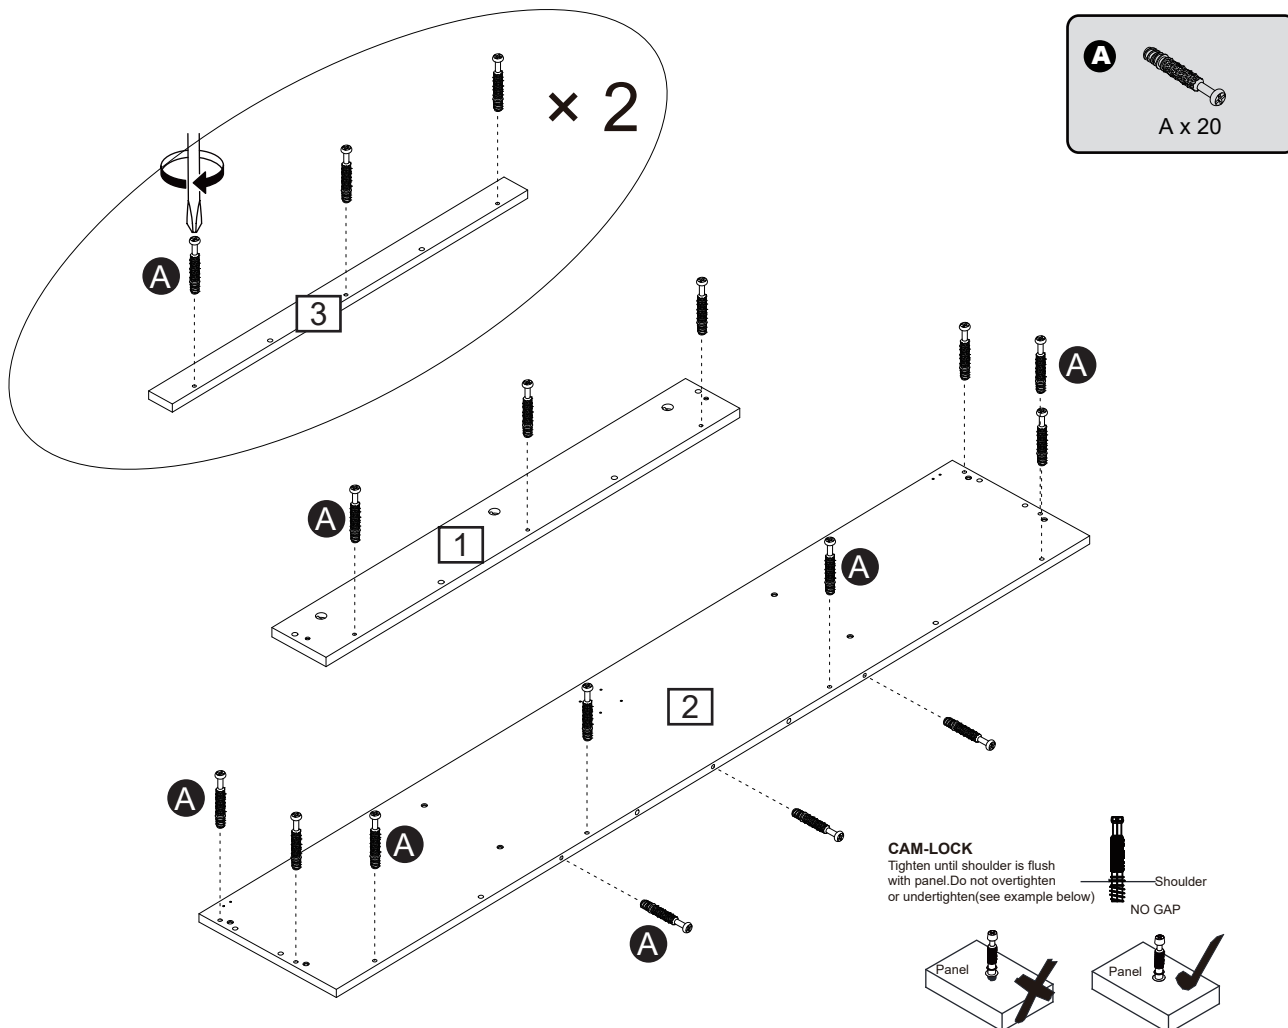



2

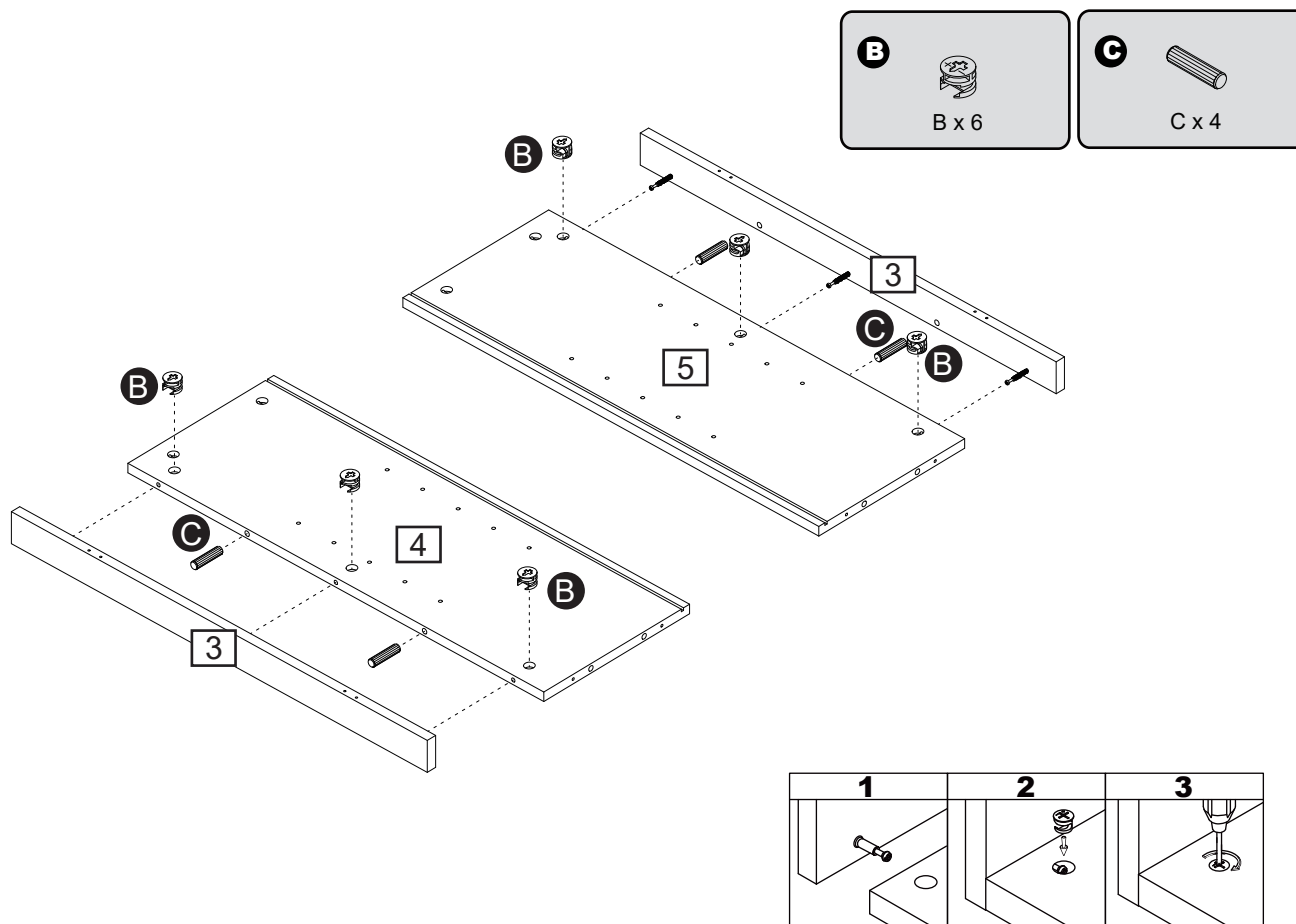



3

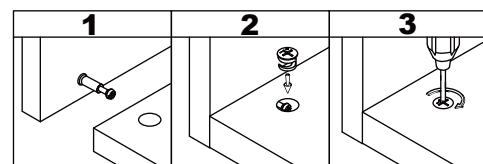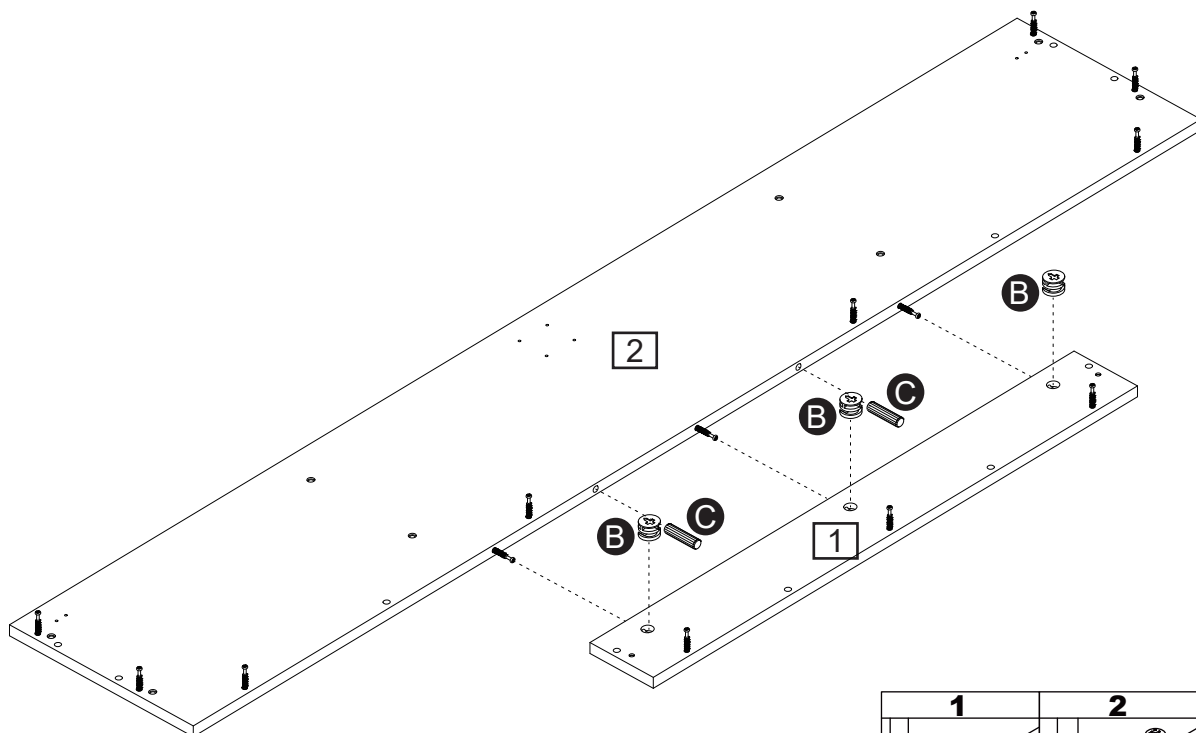

4


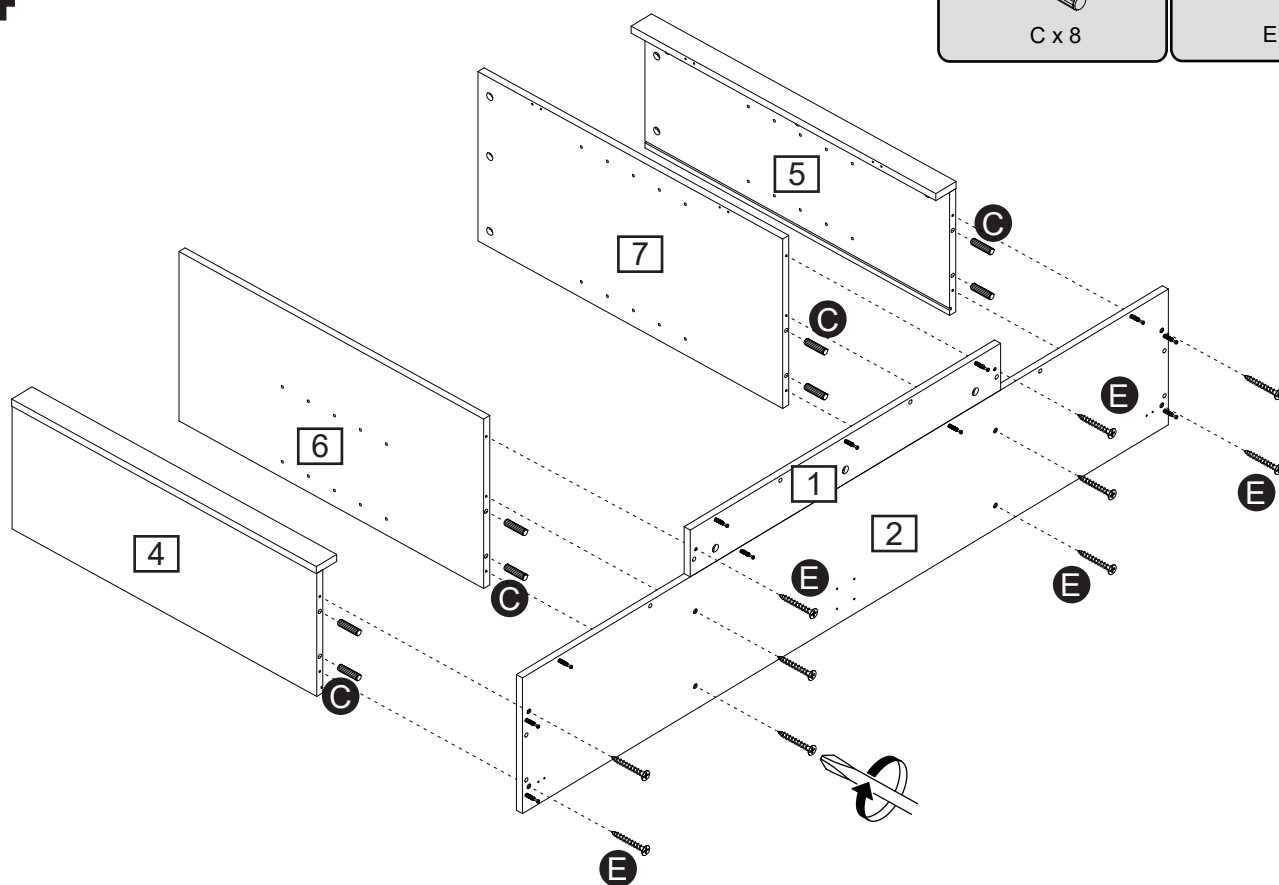



5


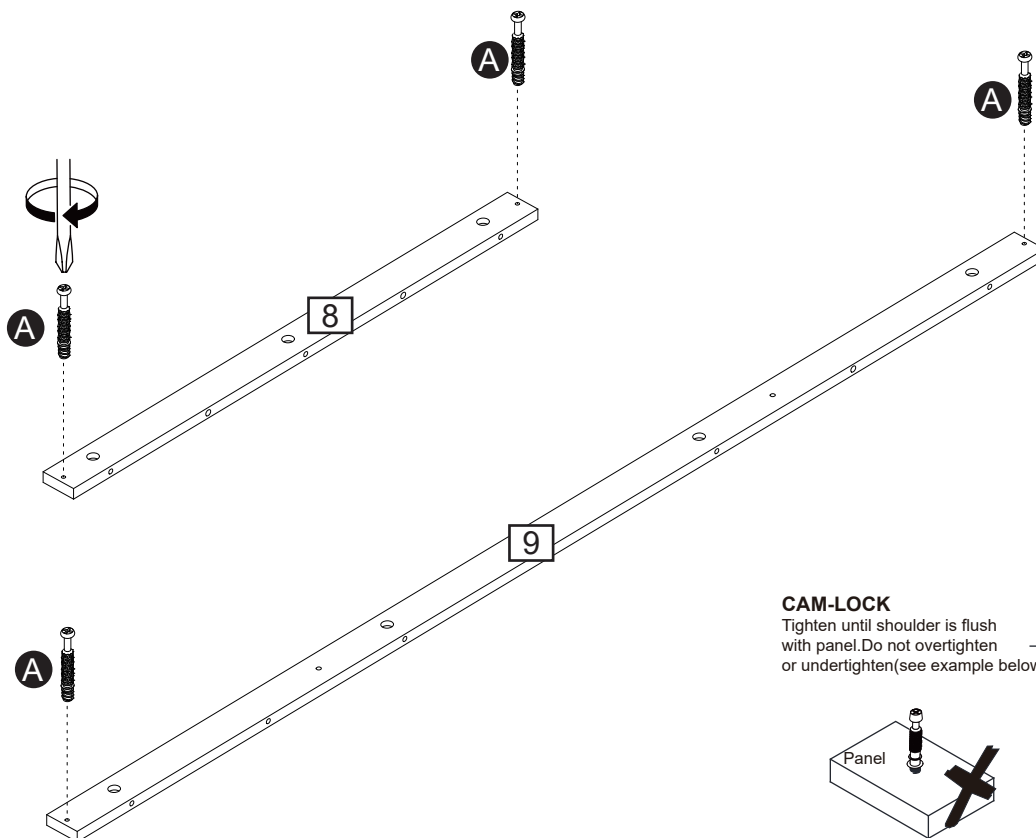



CAM-LOCK





Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)





6

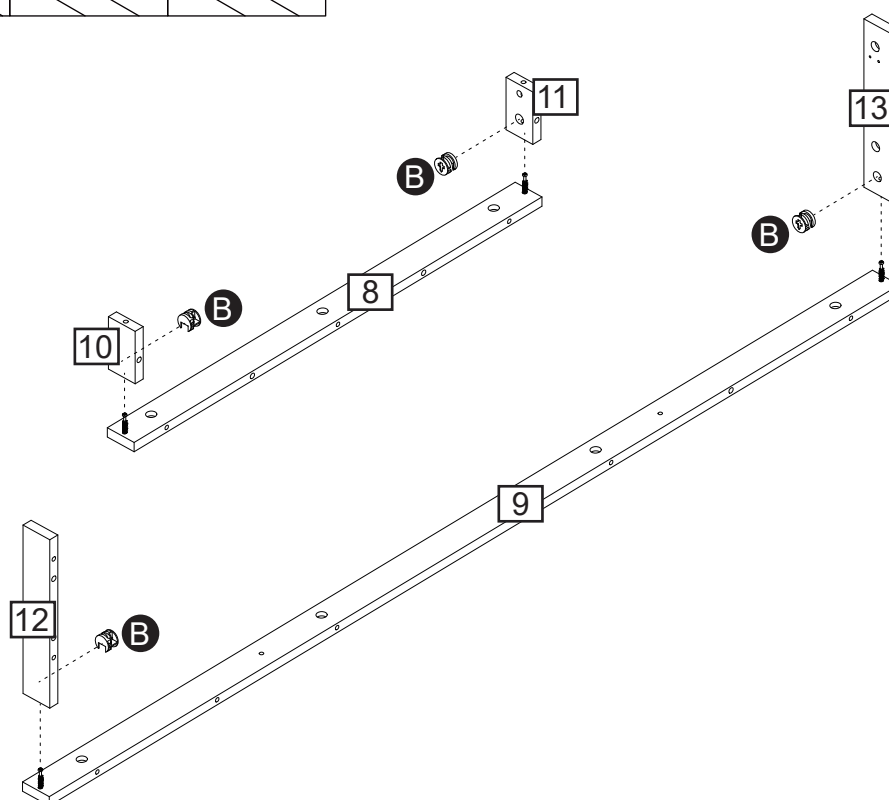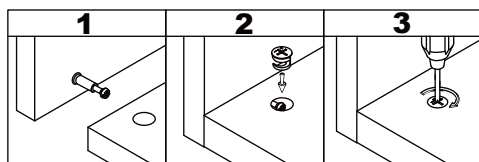



7

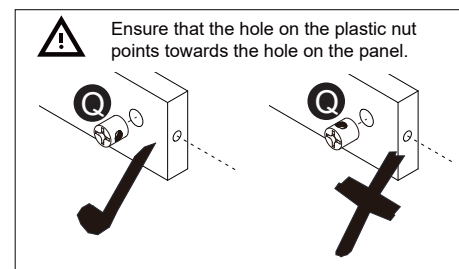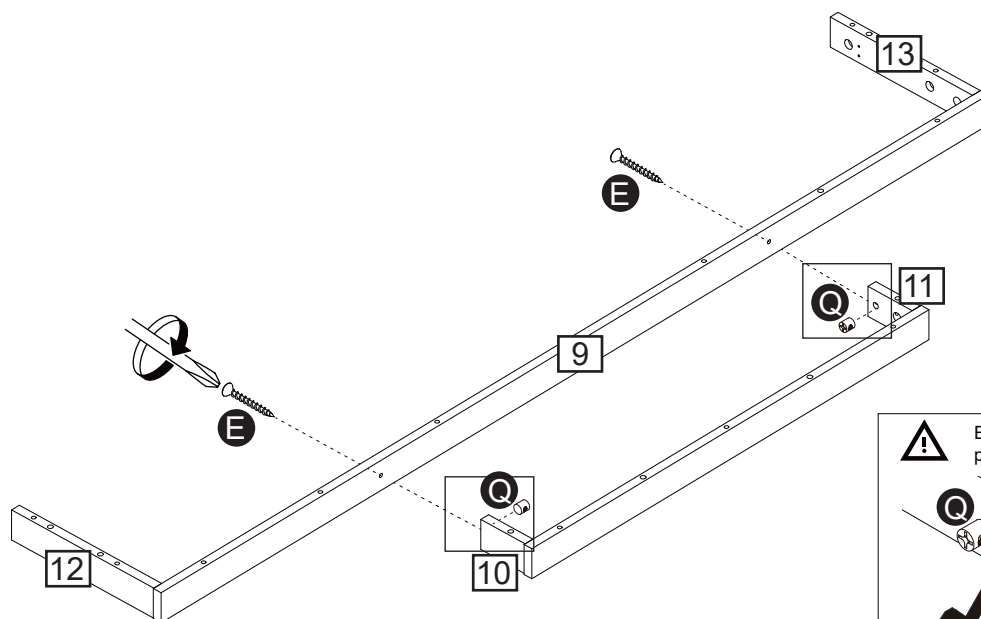



8

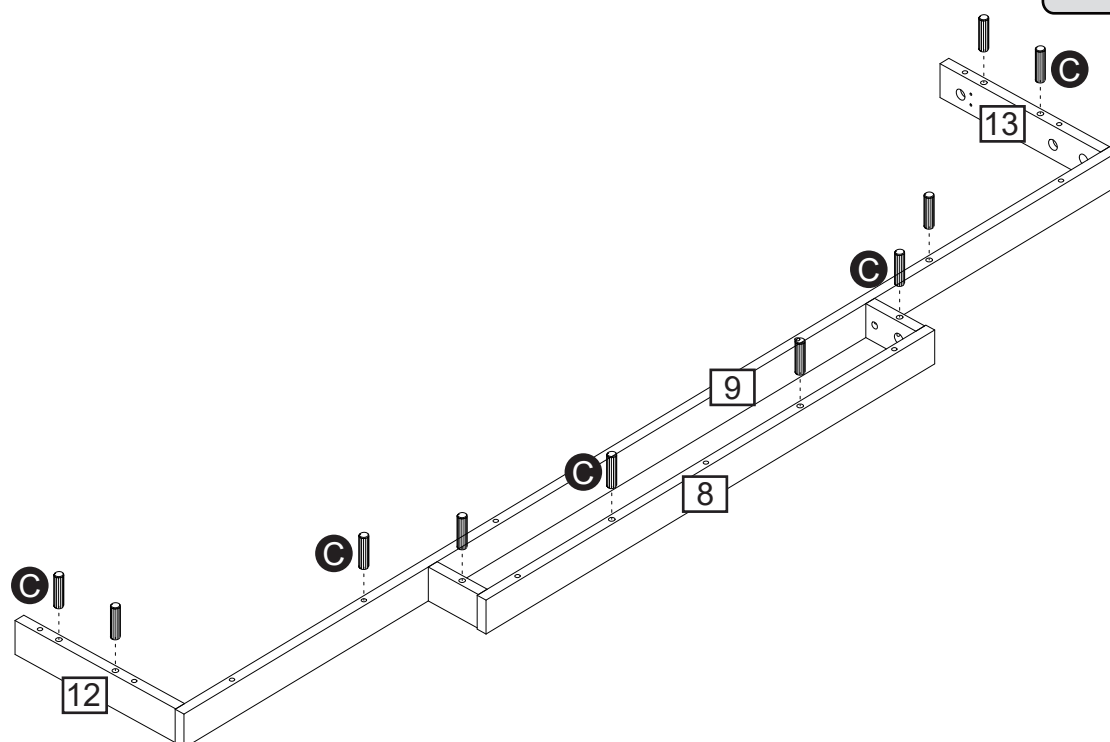






9

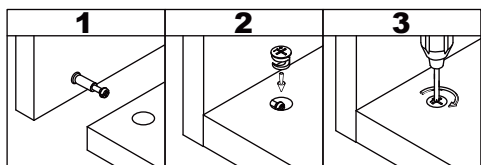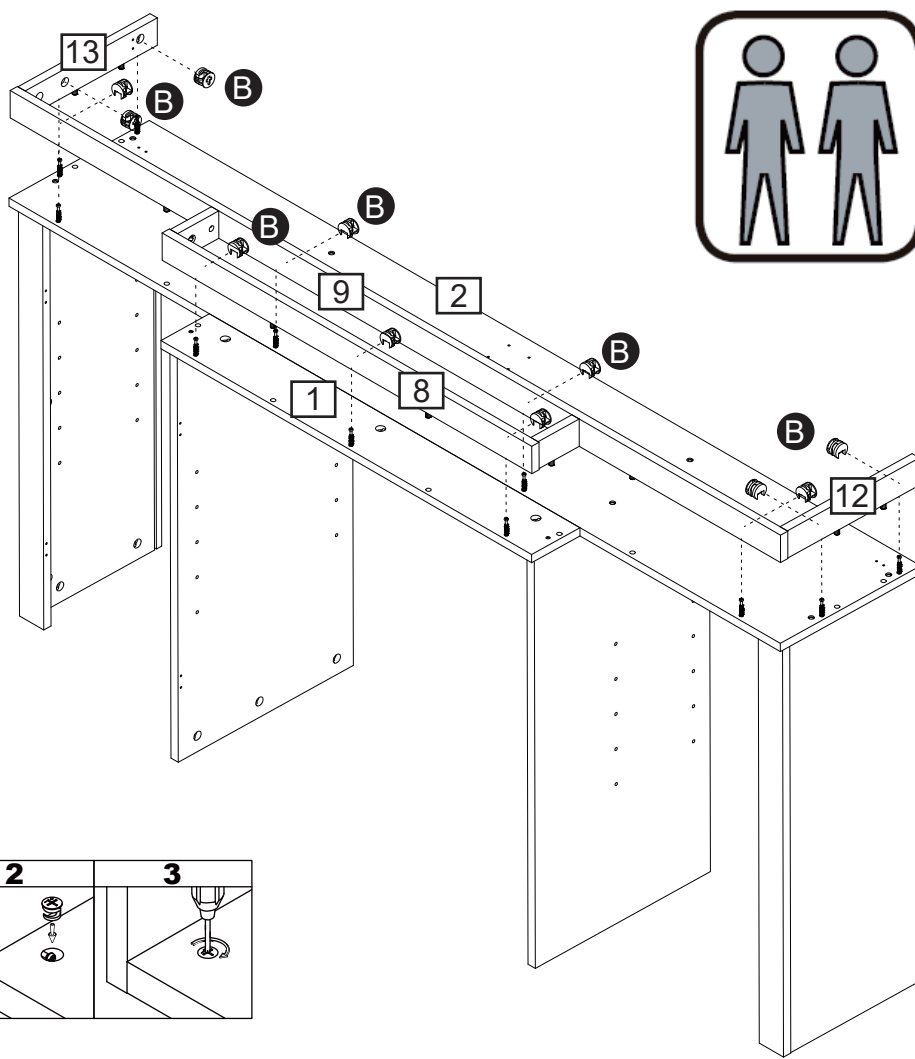


10

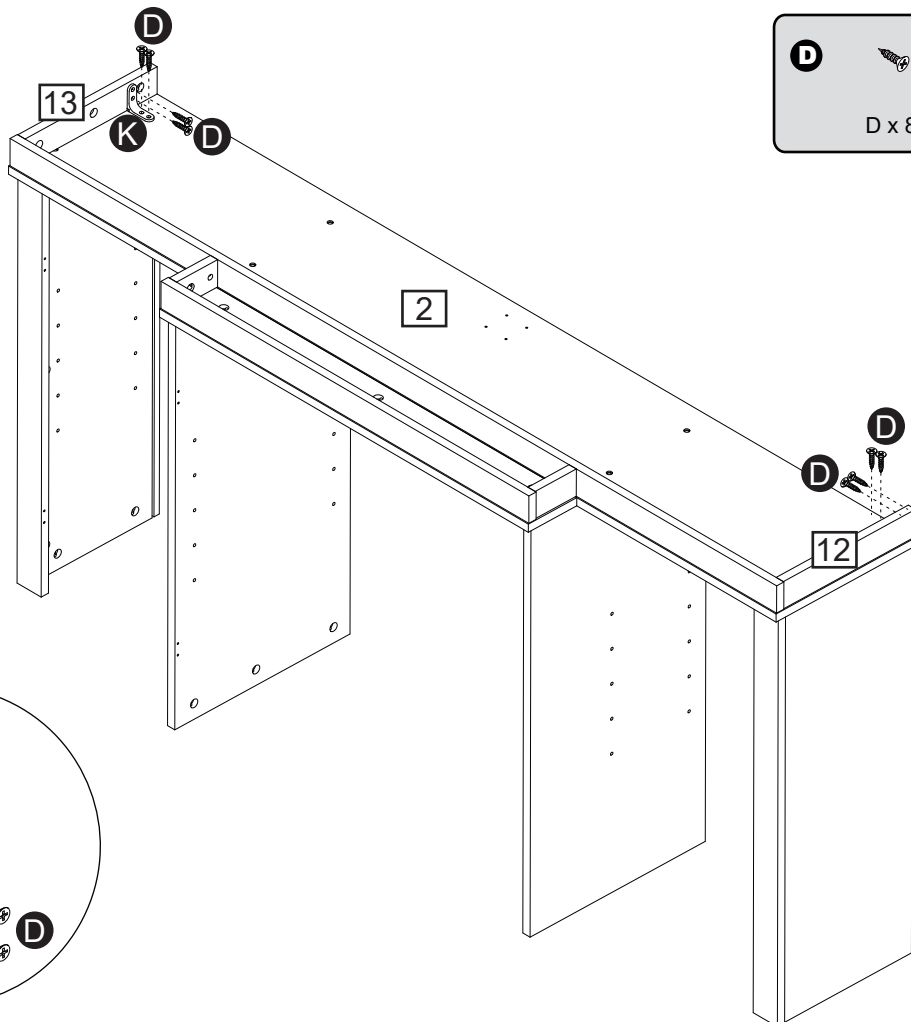



11

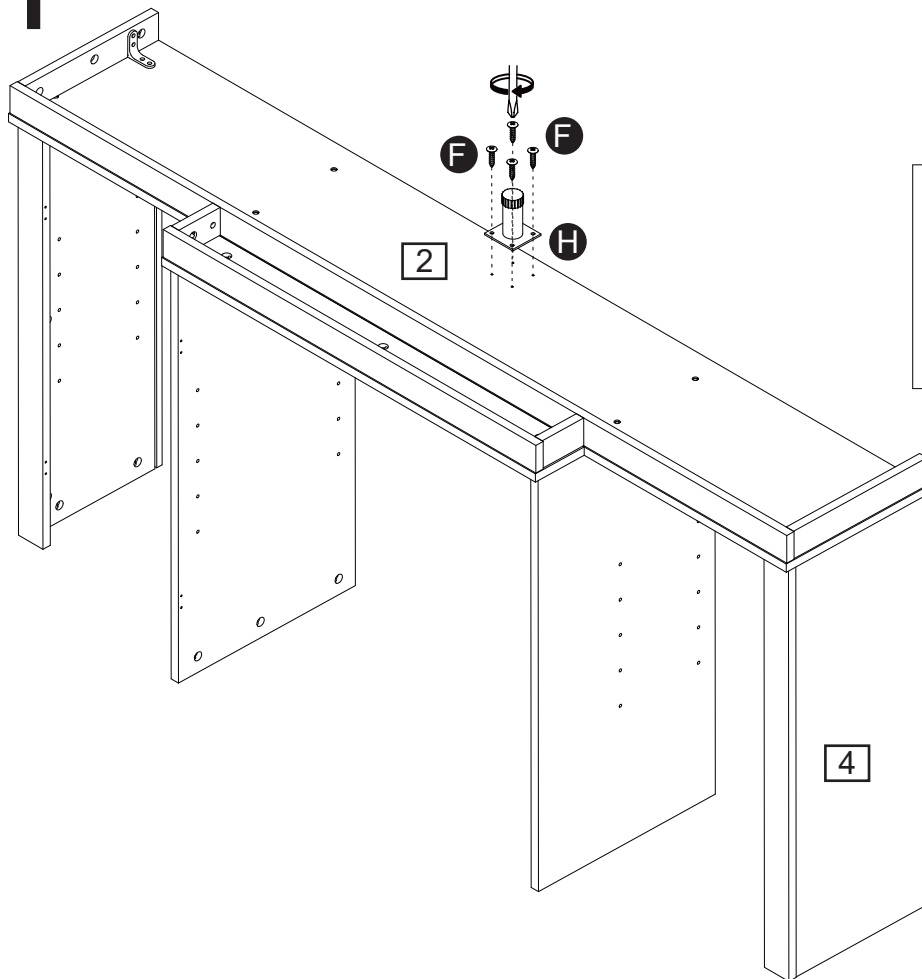

12

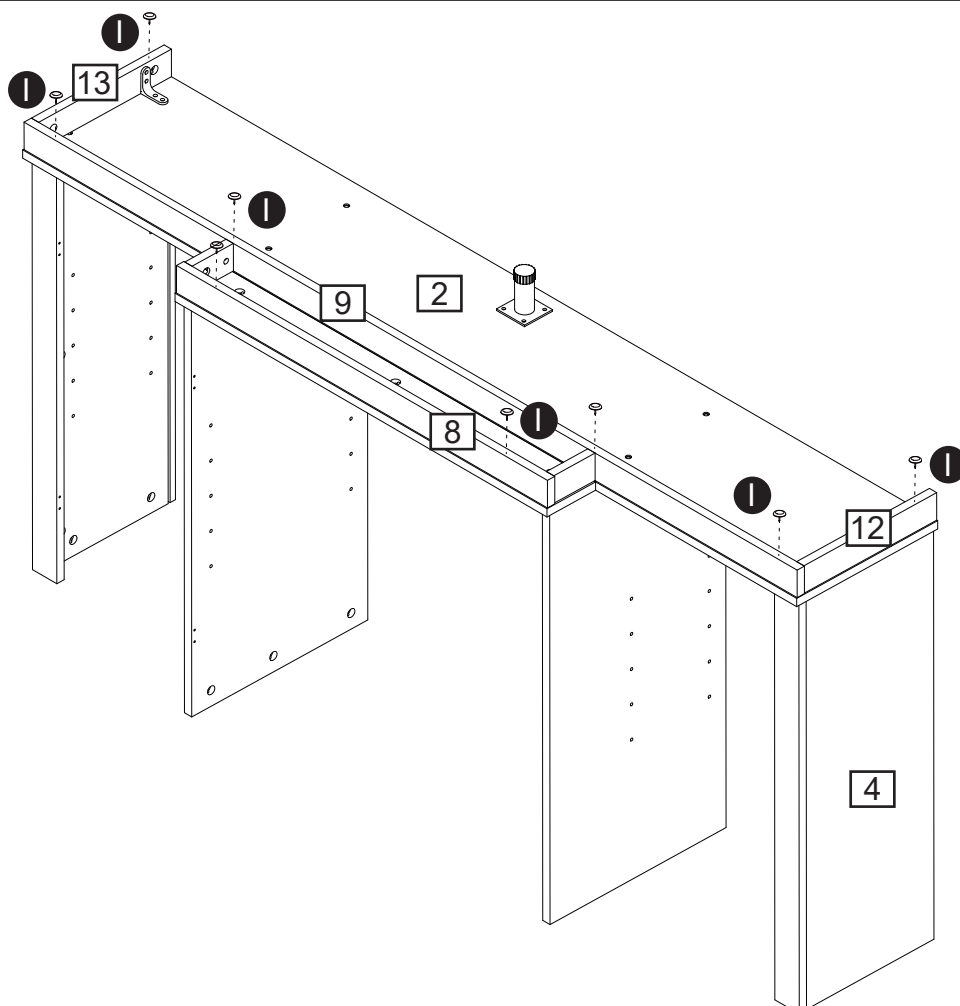


13

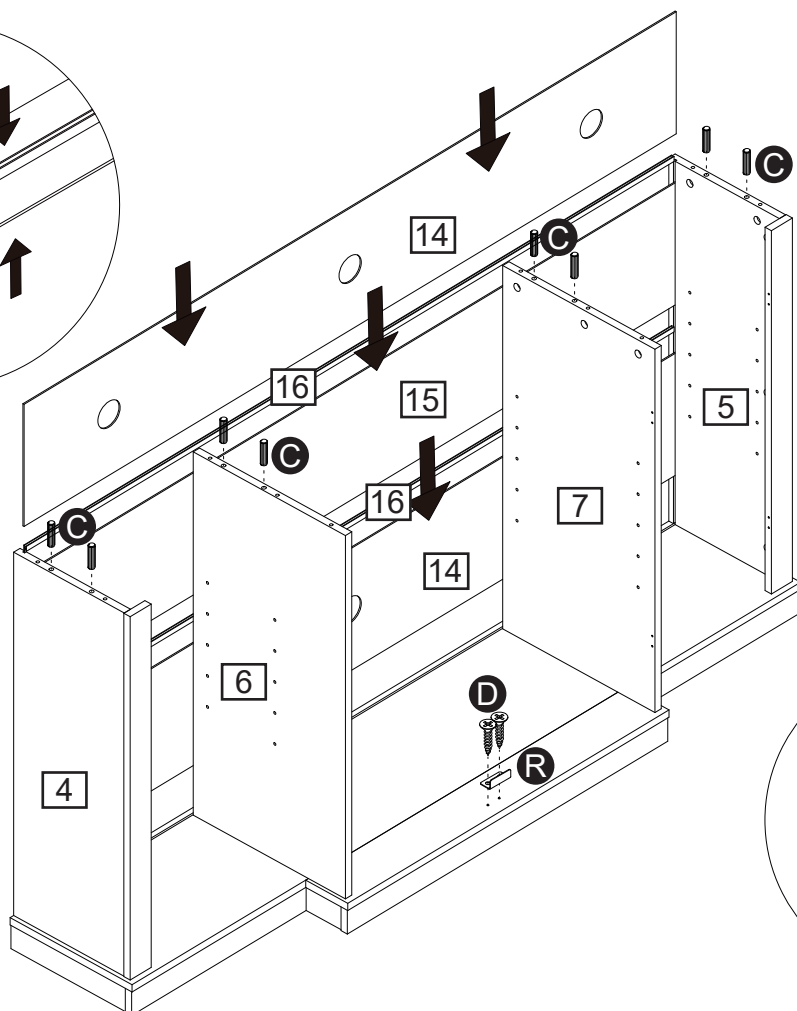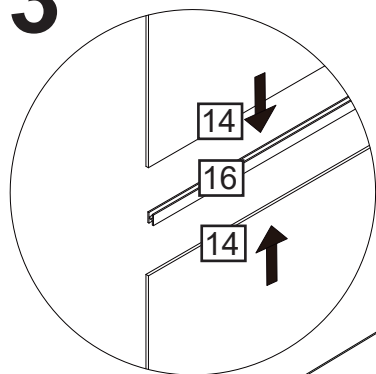

C 
C x 8

D 
D x 2

R 
x 1


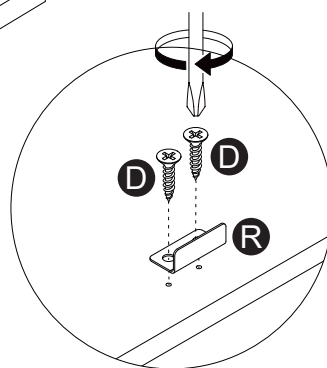


14

CAM-LOCK




Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

Shoulder
NO GAP

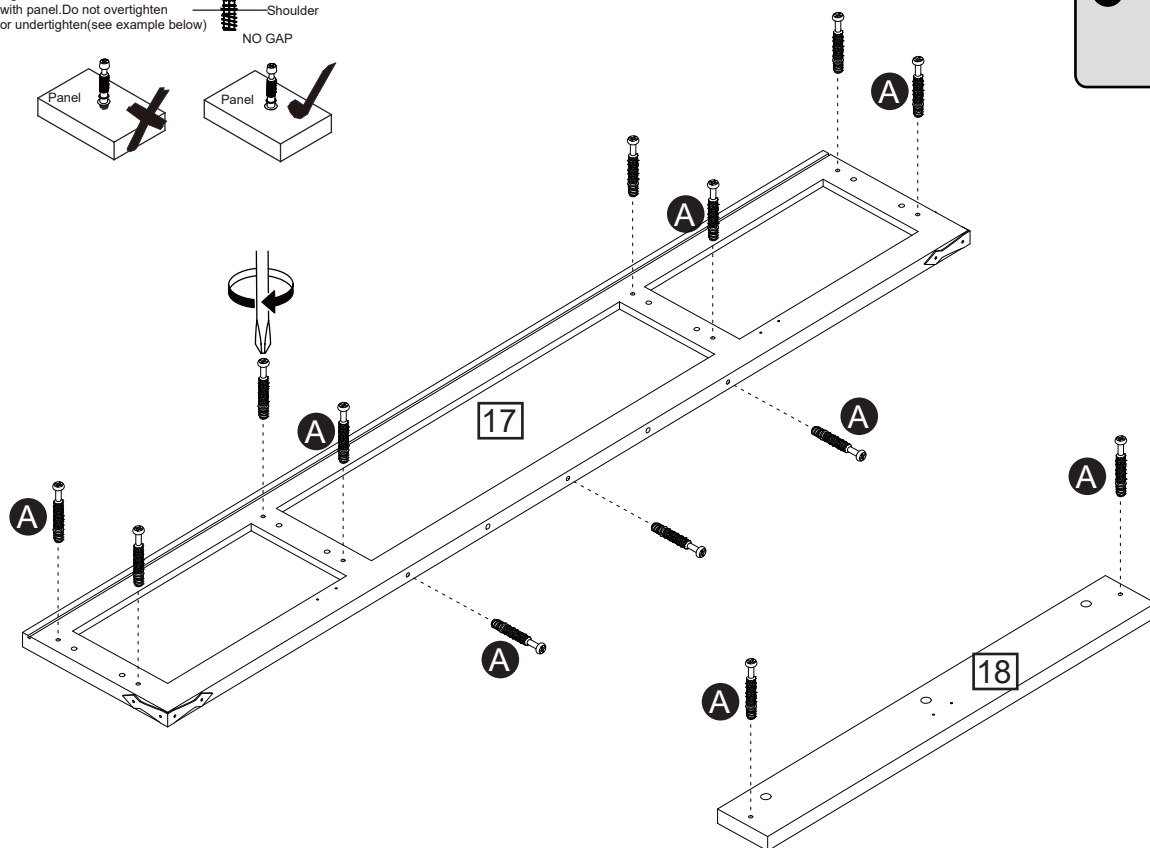



A 
A x 13




15

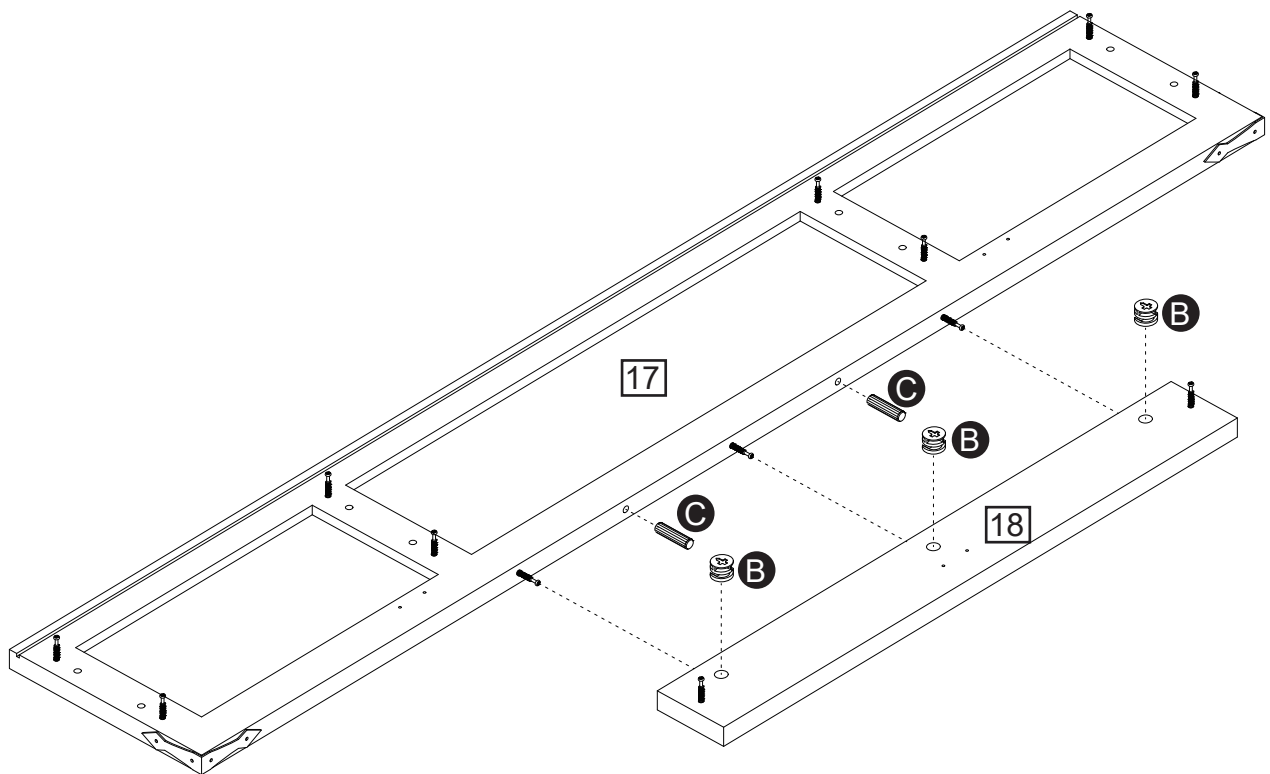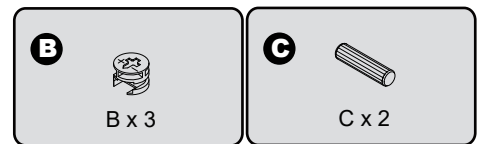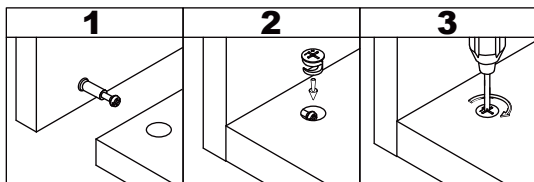



16

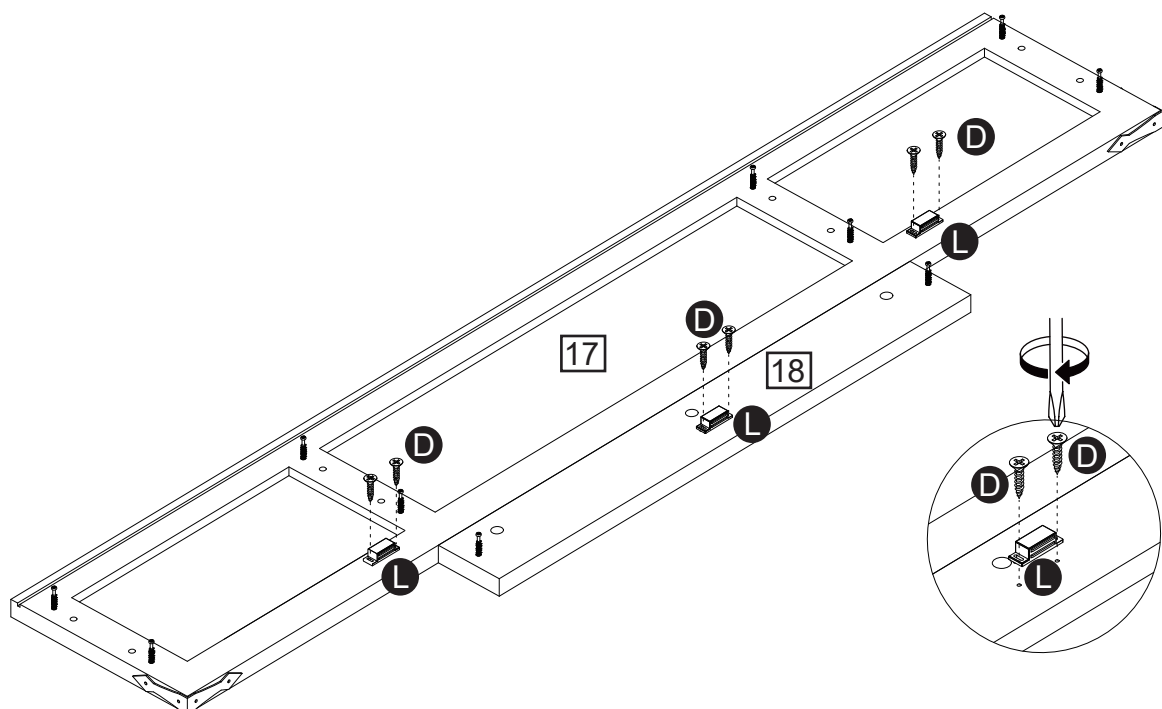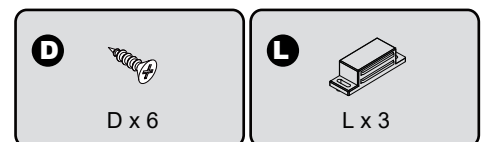






17

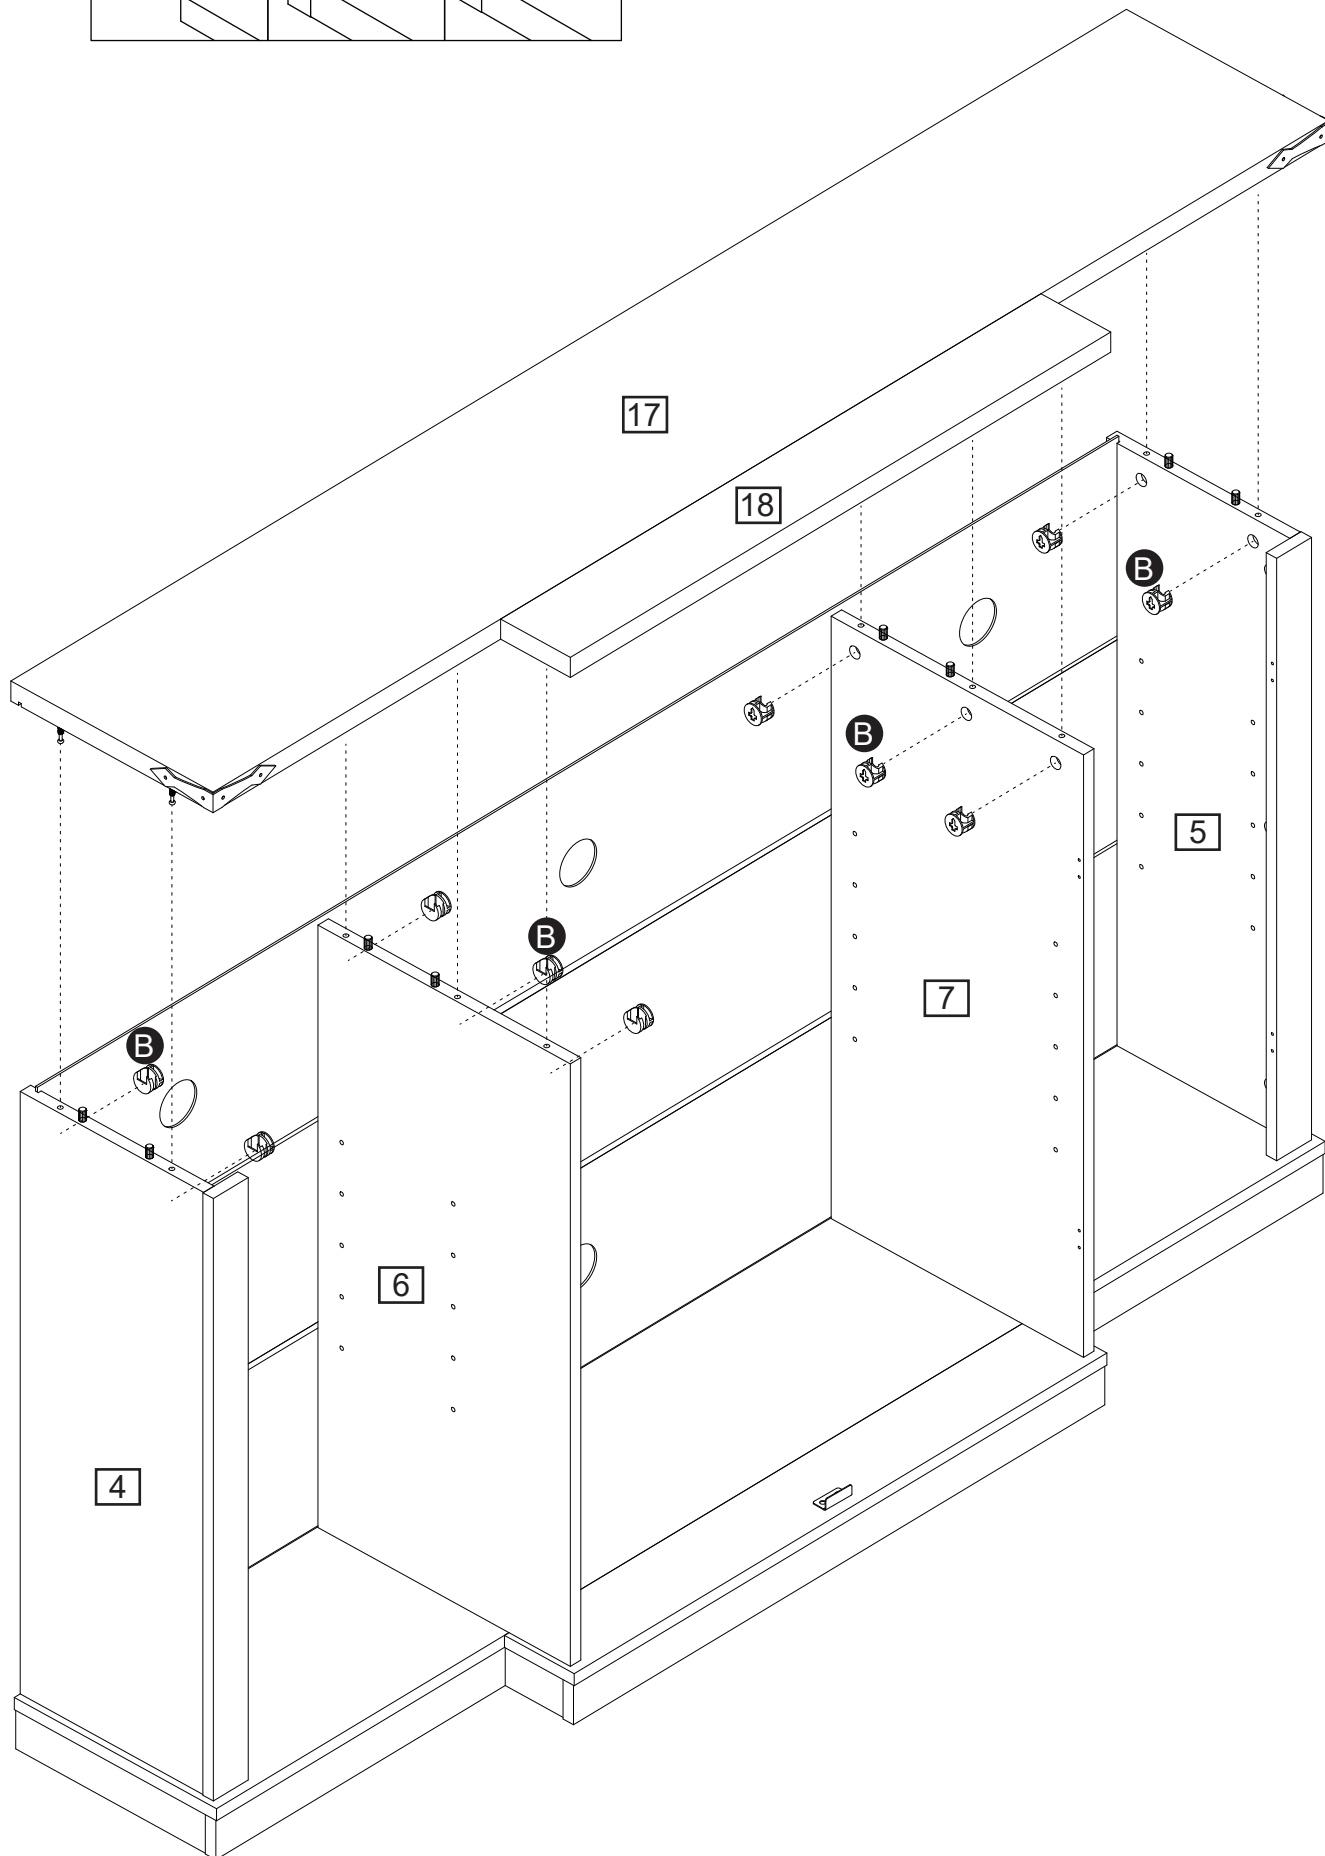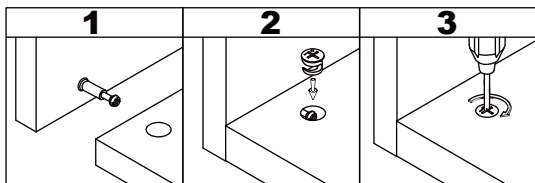



18

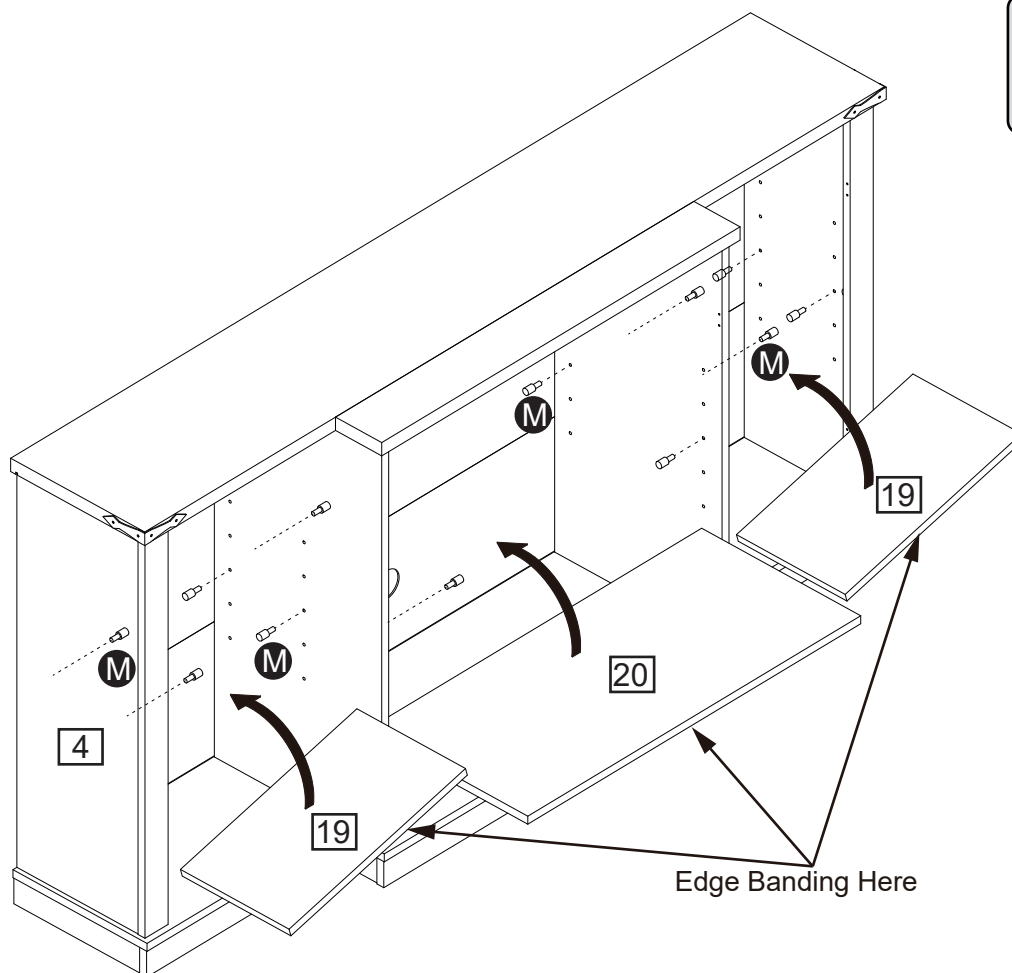





19

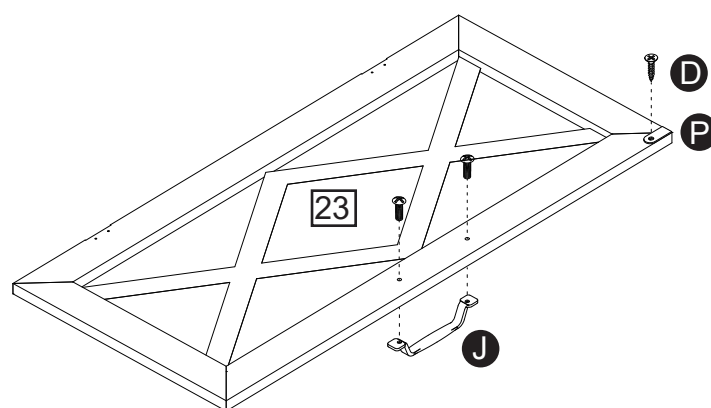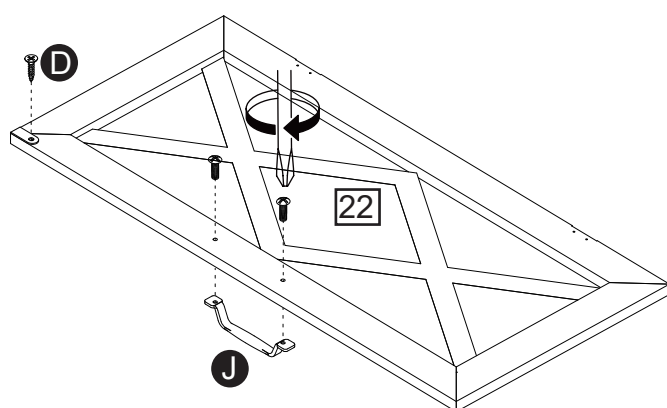



20

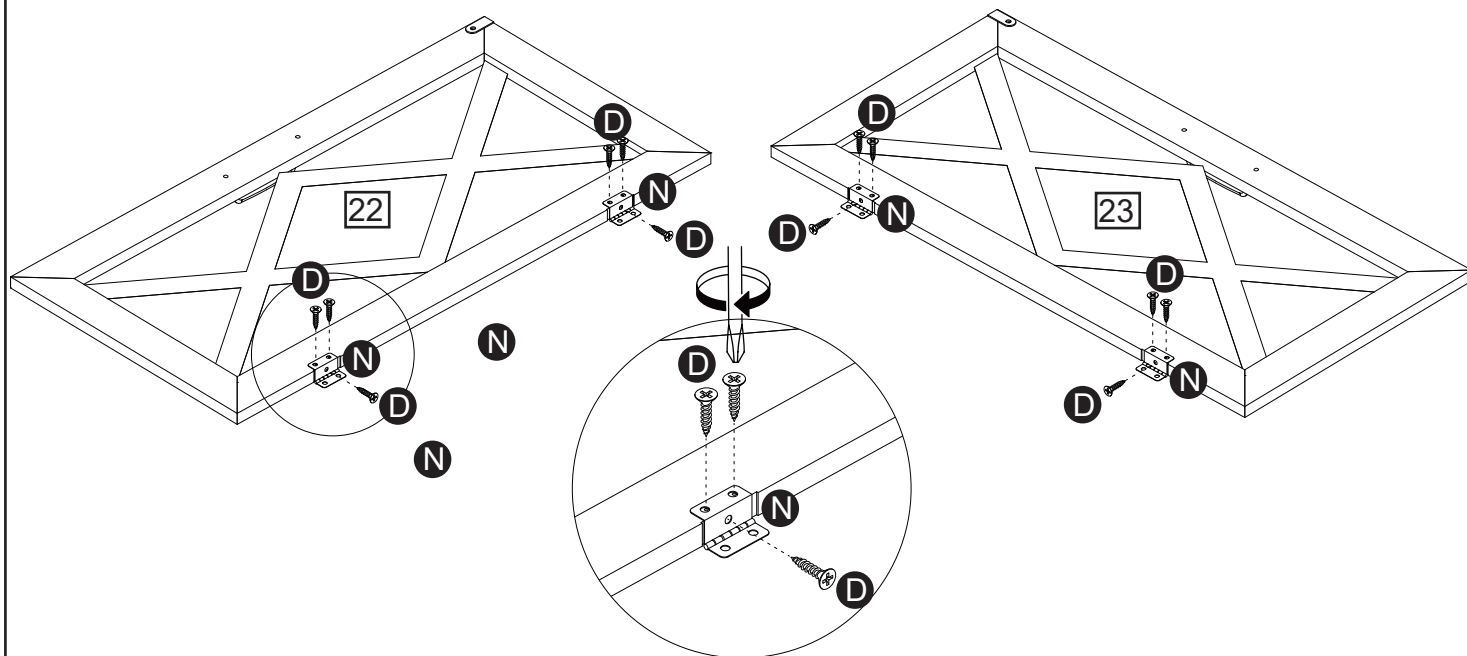



21

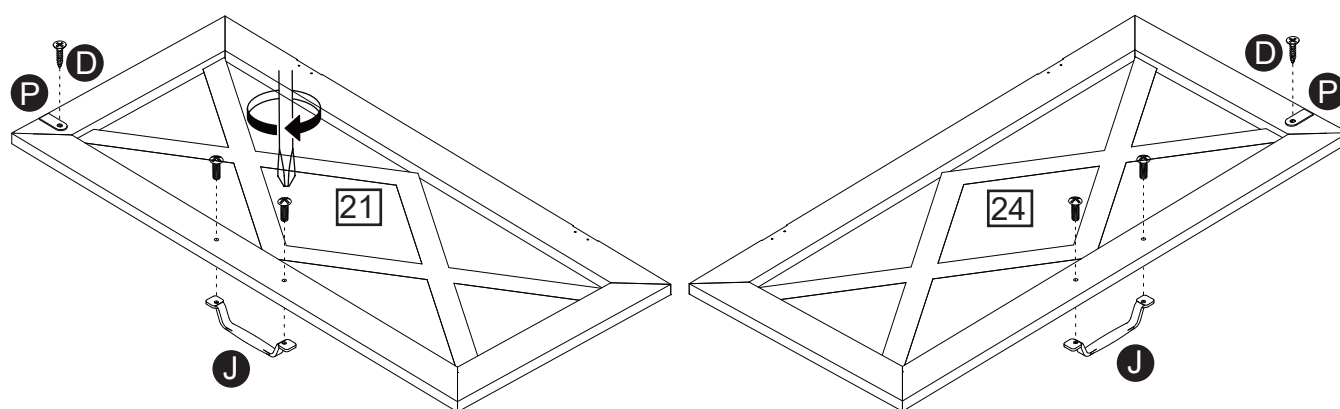


23

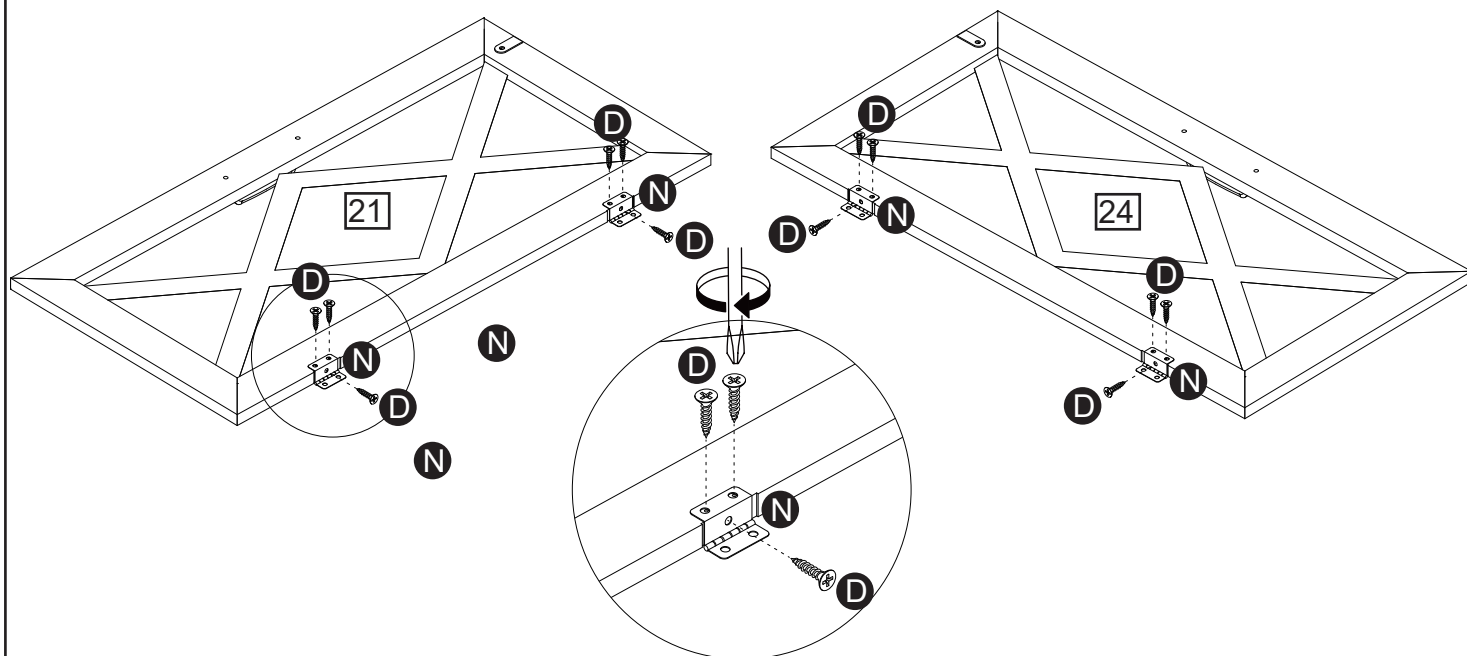



24

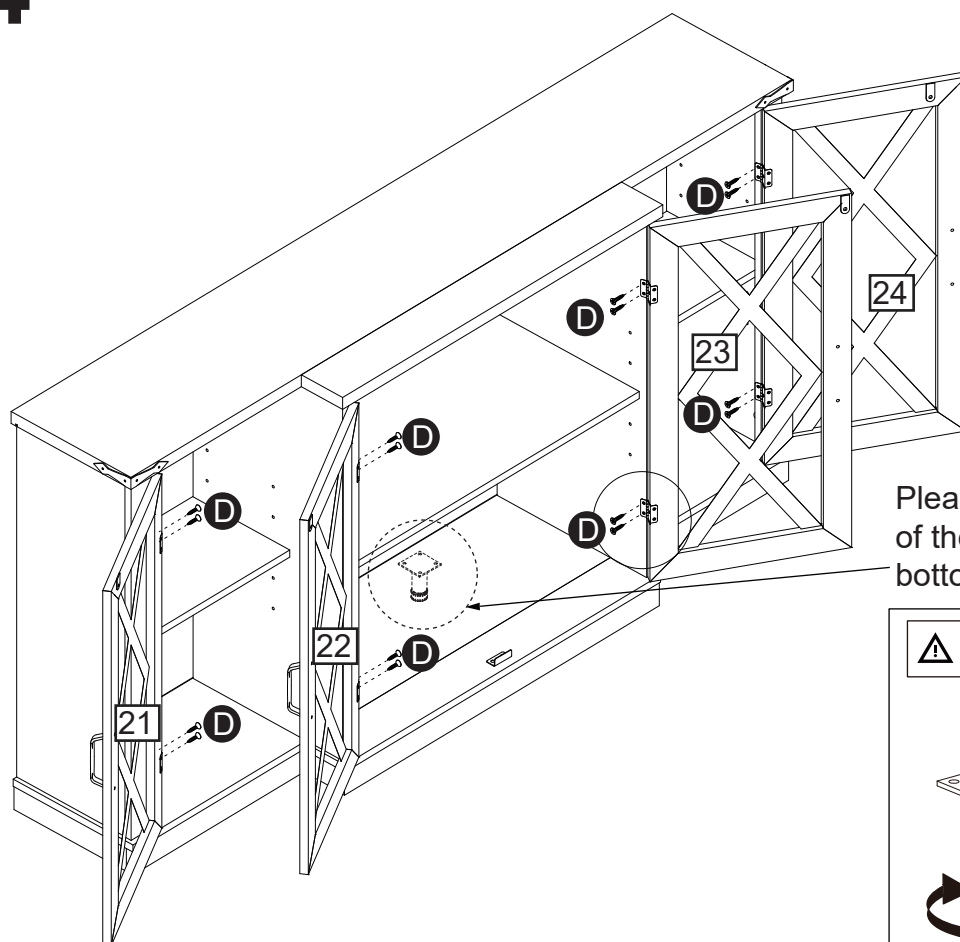



Please adjust the height of the leg to keep the bottom level.

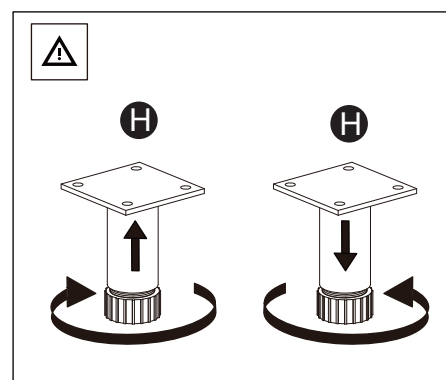

25

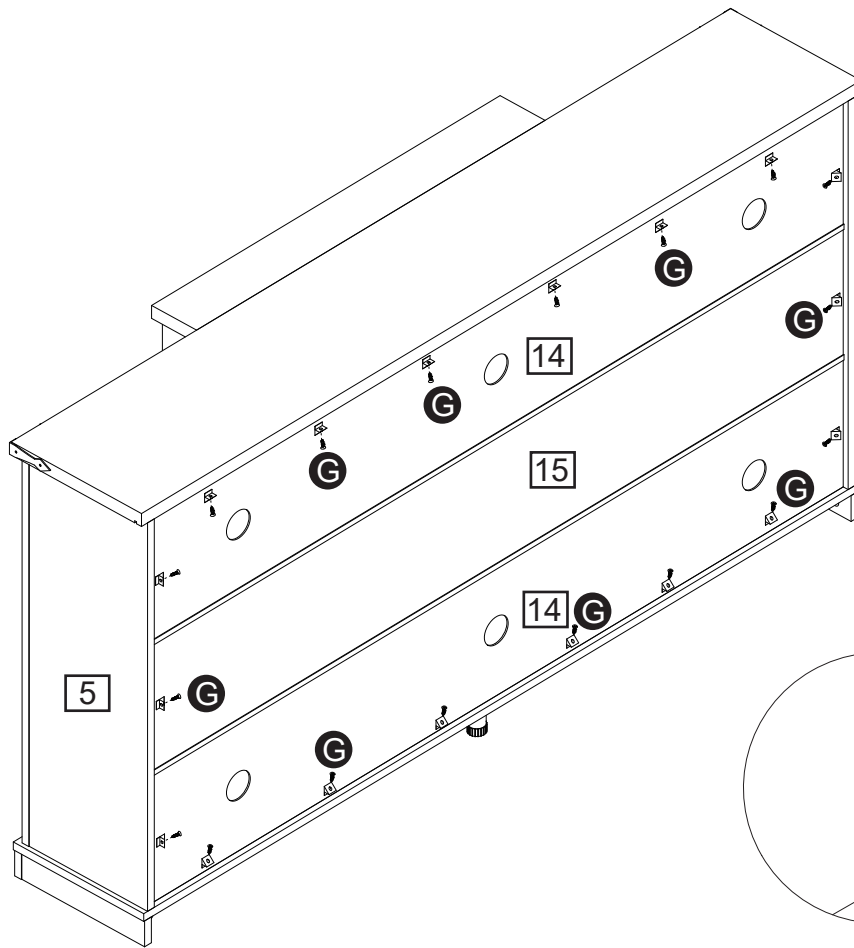

26

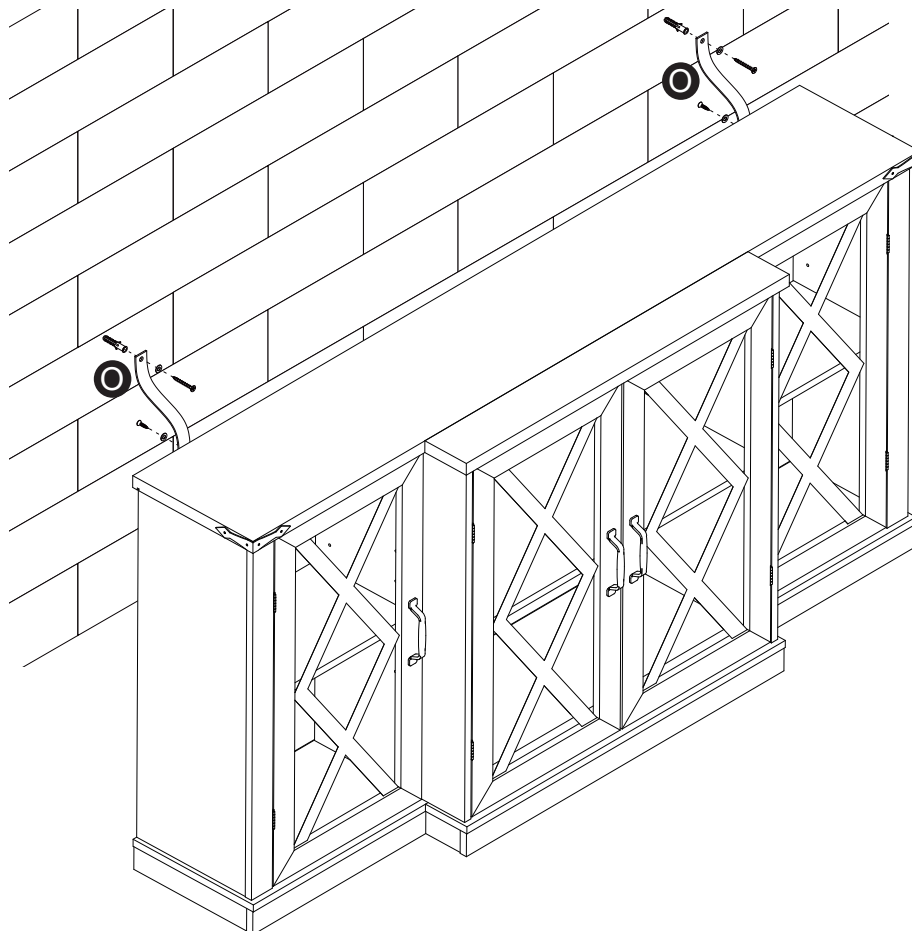

A Guide to Wall Mounting & Fixings

Important note:

If plastic wall plugs (rawl plugs) are supplied with your product, e.g.:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using the incorrect fixings is the responsibility of the installer.



Important: when drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for **supporting your unit**. **Consult a qualified tradesperson if you are unsure.**


Hints:

- 1: General rule:  always use a larger screw and wall plug if you are not sure.
- 2: Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3: Ensure you drill the hole horizontally; do not force the drill or enlarge the hole.
- 4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

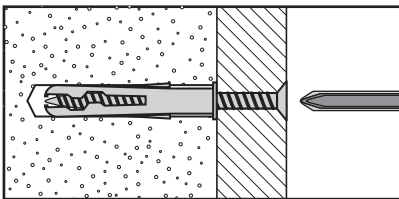


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.3 "Cavity Fixing" wall plug

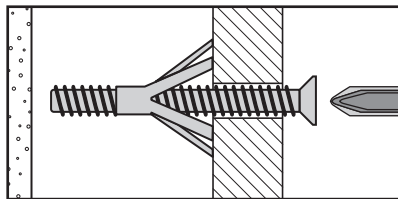


For use with plasterboard partitions or hollow wooden doors.

No.5 "Hammer Fixing" wall plug

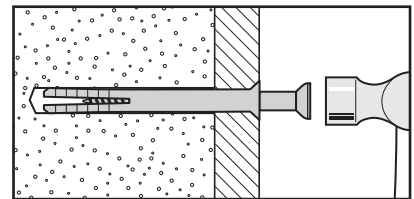


For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.2 "Plasterboard" wall plug

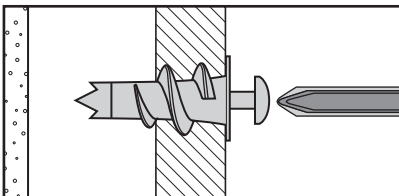


For use when attaching light loads onto plasterboard partitions.

No.4 "Cavity Fixing – Heavy Duty" wall plug

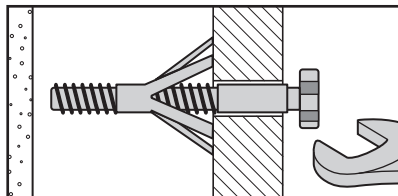

For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.6 "Shield Anchor" wall plug – heavy loads

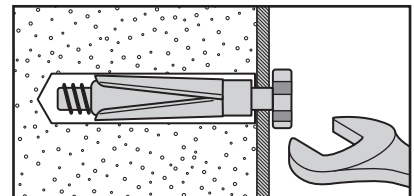

For use with heavier loads such as TV and HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: always check the fitting and location to ensure your safety in and around the home.

Fitting: from time to time check the fitting to ensure the wall plugs or screws do not become loose.