


welcoming • sophisticated • inspiring

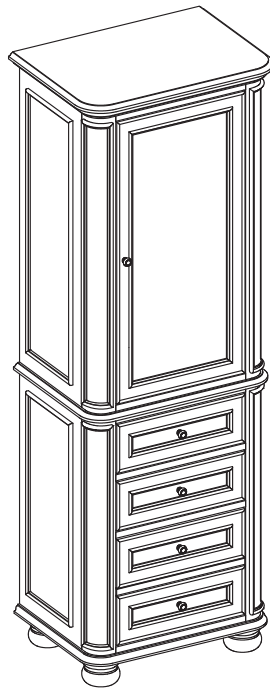

MODEL NUMBER	DESCRIPTION
1116FC-25-201	25" White Finish Floor Cabinet

FLOOR CABINET

MODEL #1116FC-25-201

ATTACH YOUR RECEIPT HERE

Serial Number _____ Purchase Date _____

Questions, problems or missing parts?


Before returning contact us on:

866-439-9800, 8 a.m. - 8 p.m., EST, Monday - Sunday or ascs@lowes.com.

TABLE OF CONTENTS


Package Contents.....	3
Hardware Contents.....	3
Safety Information.	4
Preparation	4
Assembly or Installation Instructions	4
Care and Maintenance	8
Warranty	8
Replacement Parts List	9

PACKAGE CONTENTS

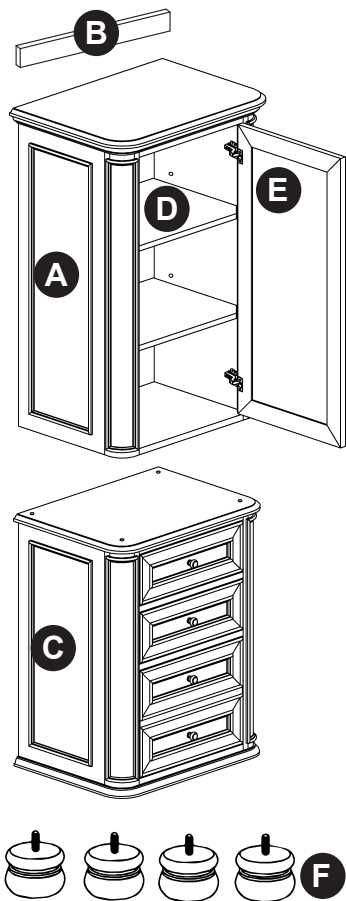

PART	DESCRIPTION	QUANTITY
A	Cabinet Top	1
B	Wall Mounting Spacer Bar (preassembled to Cabinet (A))	1
C	Cabinet Base	1
D	Shelf	2
E	Door	1
F	Foot	4

HARDWARE CONTENTS (NOT SHOWN ACTUAL SIZE)

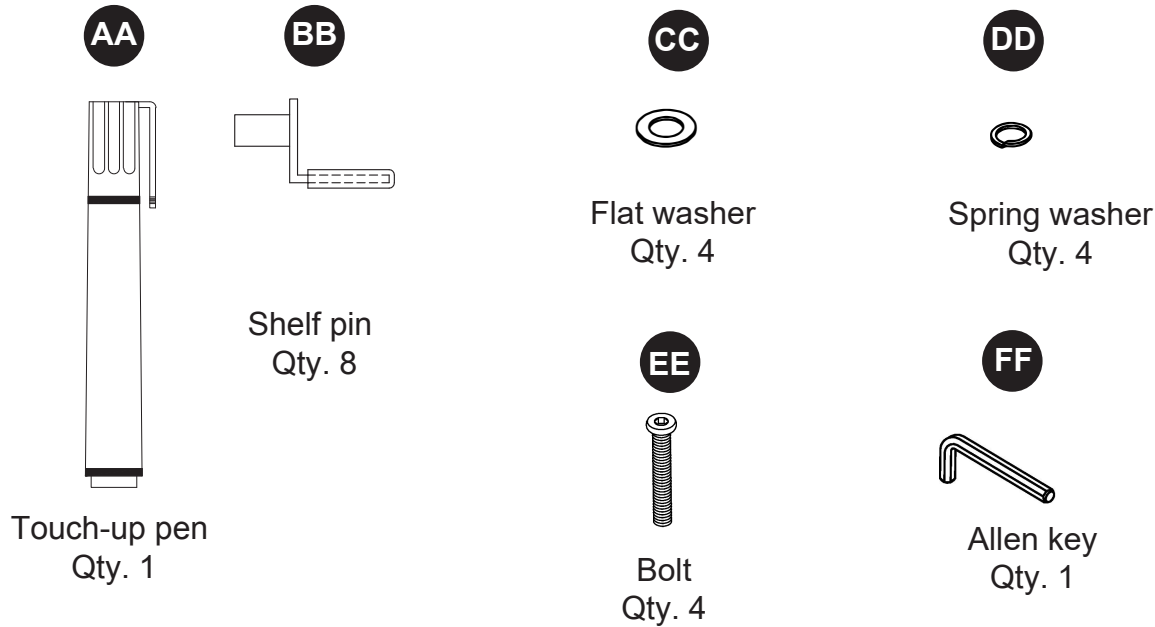



SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install this product.



WARNING

- Some steps are more easily handled with two adults.

CAUTION

- Before installation, carefully use scissors or utility knife to cut and unwrap all parts. Make sure you DO NOT discard the hardware.
- Use care when installing your new floor cabinet; take your time and follow the installation instructions closely.

KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 20 minutes (24 hours for silicone caulk to dry).

Tools Required for Assembly (not included): Phillips screwdriver, utility knife or scissors, power drill with drill bit and measuring tape.

INSTALLATION INSTRUCTIONS

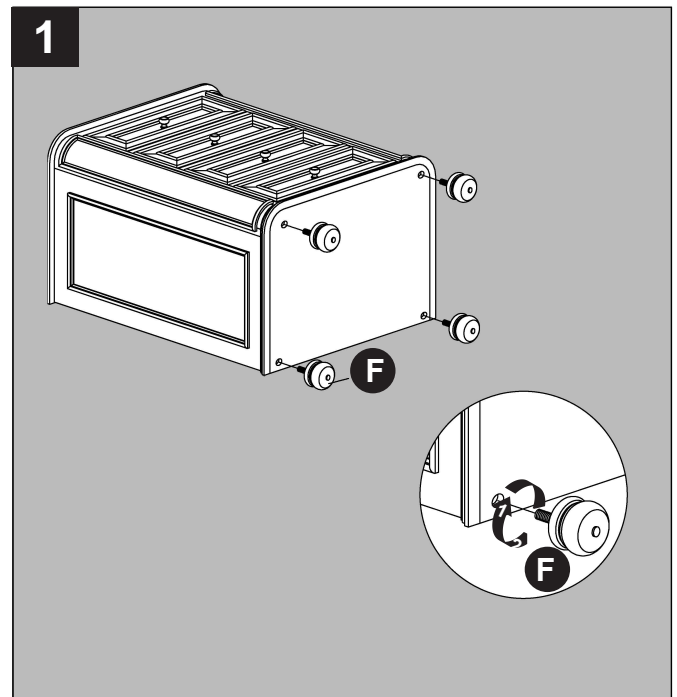



1. With 2 people, place the vanity on its back on a flat, scratch free surface. Locate the Feet(F) and screw into the base of the vanity. Once complete, lift the vanity back up into the upright position.




INSTALLATION INSTRUCTIONS


2. Carefully place Cabinet Top(A) onto Cabinet Base(B) and join together by using bolts (EE), Spring washers (DD), Flat washers (CC) as shown. Tighten all bolts (EE) by allen key (FF) using care not to over tighten.

Hardware Used

CC	Flat washer		x 4
DD	Spring washer		x 4
EE	Bolt		x 4
FF	Allen key		x 1

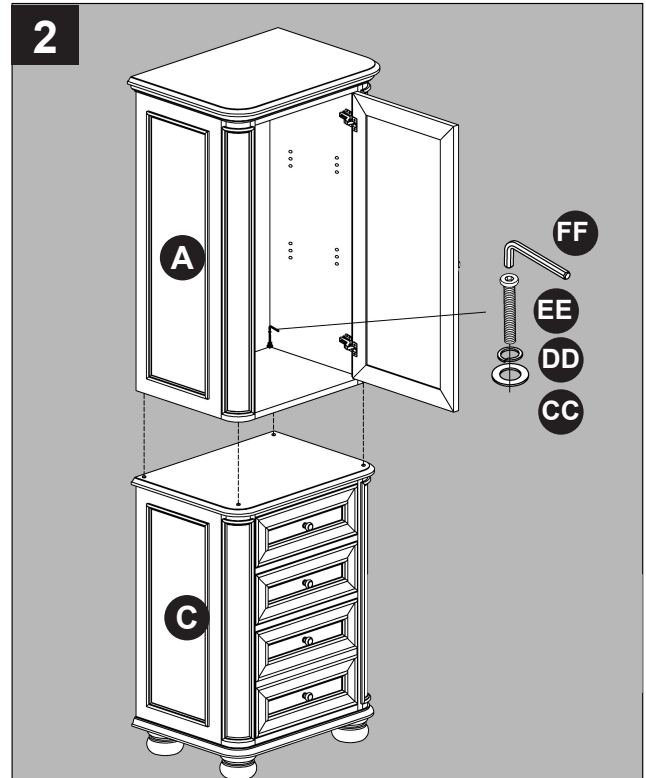


3. If there is baseboard at the location where you want to install floor cabinet then directly go to step 2. If there isn't a baseboard at the location, please remove the wall mounting spacer bar (B) from back of cabinet by unscrewing the screws on the back of the wall mounting spacer bar then go to step 2.

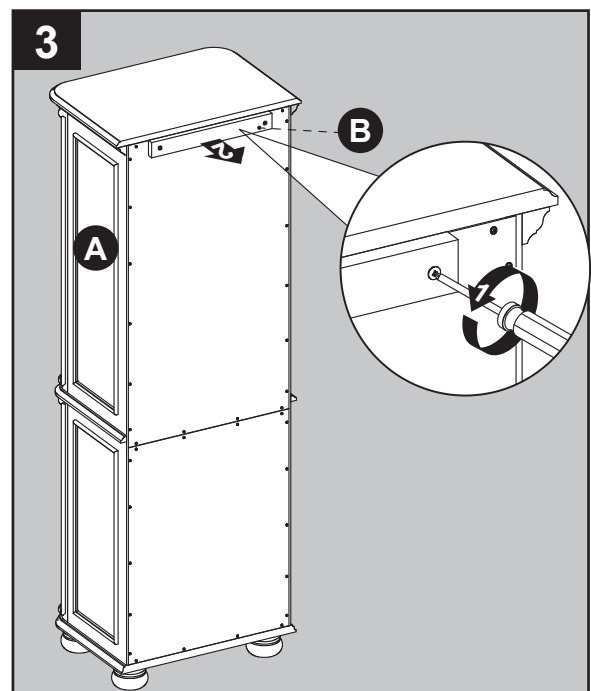

INSTALLATION INSTRUCTIONS

4. Clean area where the cabinet (A) will be permanently located prior to beginning installation, ensuring the cabinet (A) will not interfere with any plumbing or electrical lines once mounted.

Locate wall studs and mark locations. With the help of another adult, place completed cabinet assembly in its final location. Adjust the height of the cabinet (A) by twisting the adjustable leveler foot pins on the bottom of each leg. Twist clockwise to decrease height or twist counter-clockwise to increase cabinet height. Using hardware appropriate for your wall type such as cabinet screw or toggle bolt (not included), secure cabinet (A) to preferably two wall studs anywhere through the cabinet mounting bar. Be careful not to disturb any electrical or water lines that may be concealed in the wall.

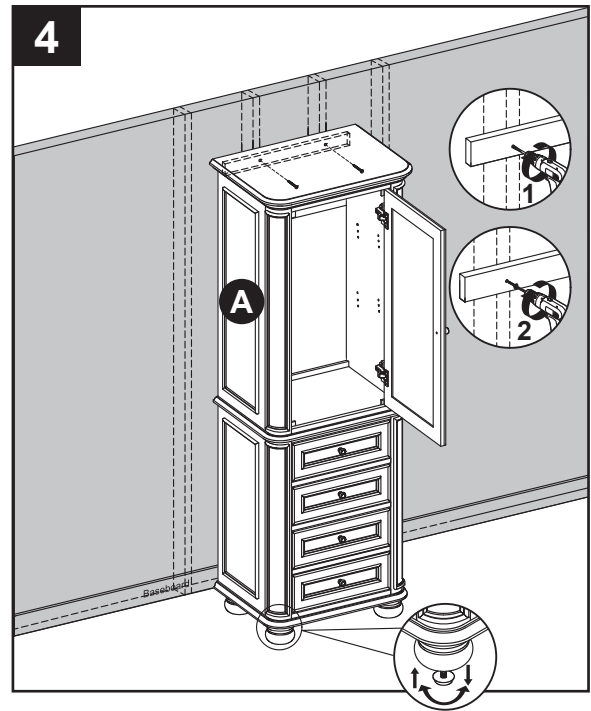


5. Insert shelf pins (BB) at desired height, ensuring they are level. Place shelves (D) on top of shelf pins (BB).


Hardware Used

BB

Shelf Pin



x 8

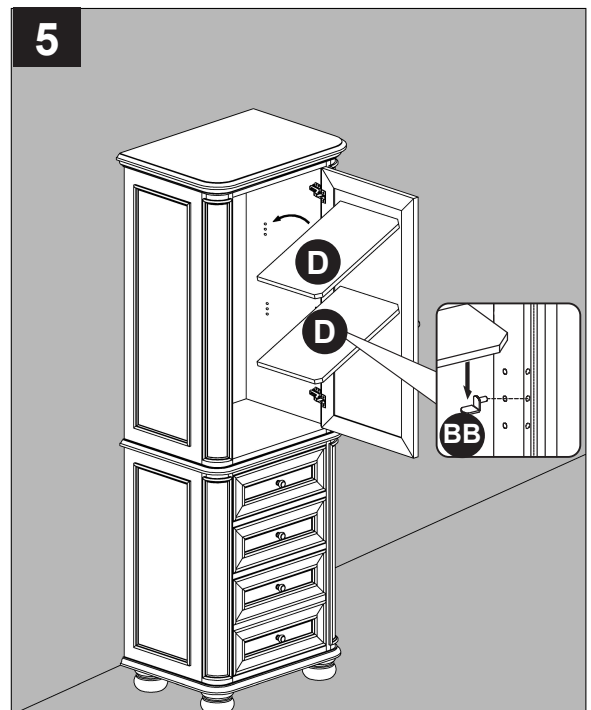


INSTALLATION INSTRUCTIONS

6. If you need to adjust the doors, do so in the following manner.

To adjust door up or down, loosen screws (a) on both hinges, adjust door, and retighten screws.


To adjust door left or right, turn screws (b) on both hinges, in or out.

To adjust door in or out, loosen screws (c) on both hinges, adjust door, and retighten screws.

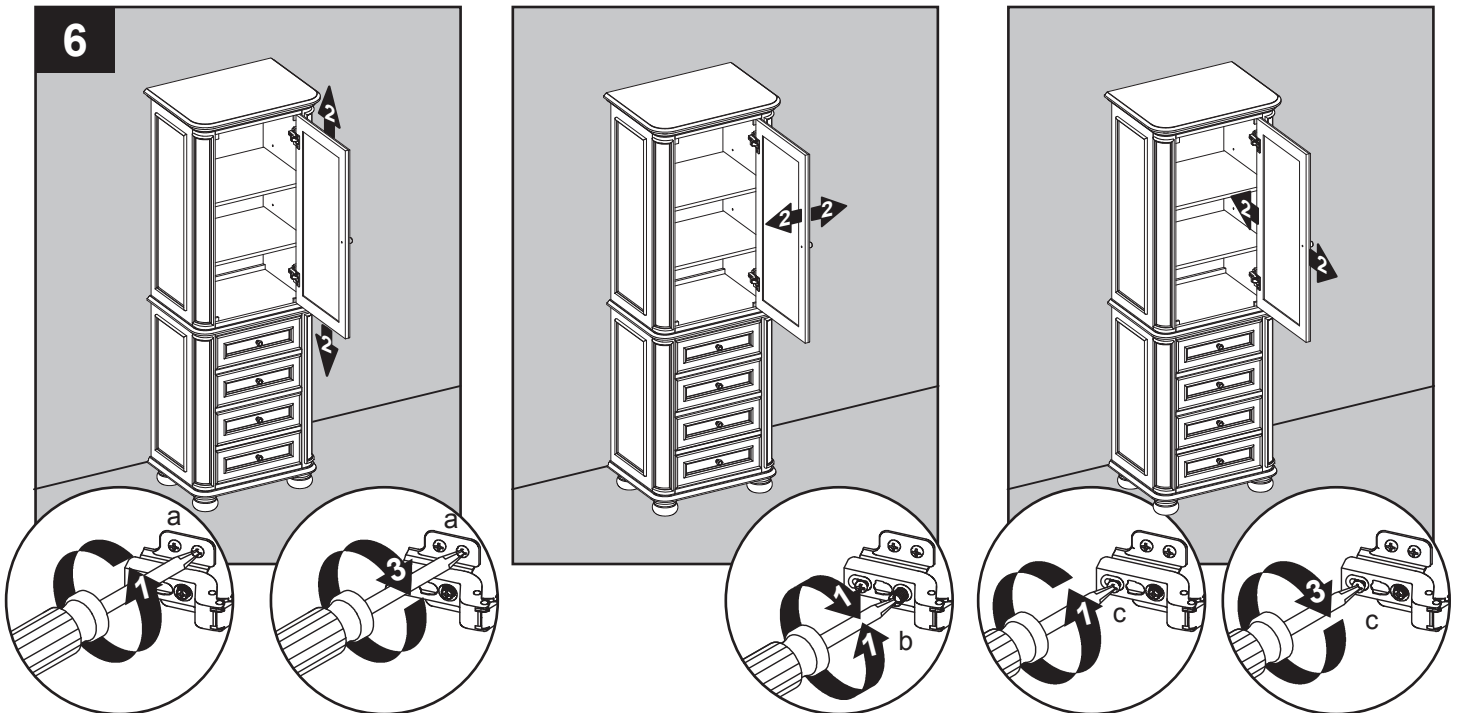


7. The cabinet is set up for the door (E) to open to the right side. To reverse the direction, unscrew the screws holding the hinges from the inside of the cabinet, and gently separate the door from the cabinet.

With the help of another adult, align the holes of the preassembled hinges on door (E) with the corresponding holes on the left side panel. Re-attached the door and hinges with the previously removed screws, checking to ensure the door opens and closes properly.

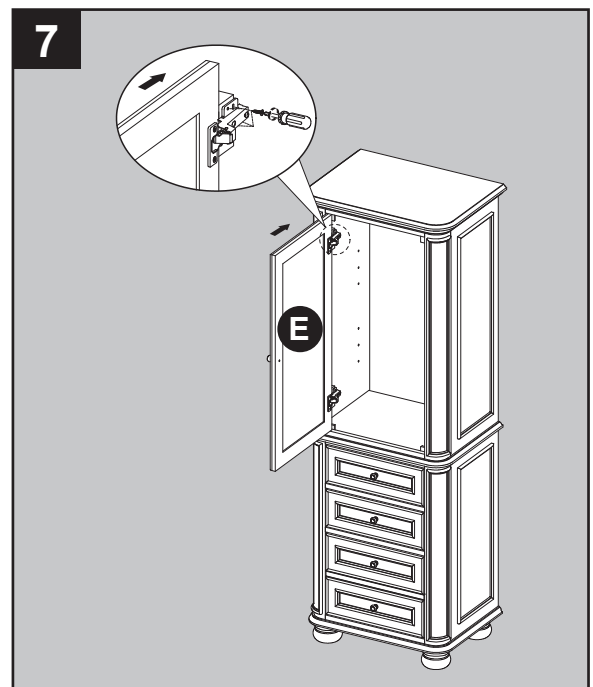


INSTALLATION INSTRUCTIONS

8. To remove drawers from cabinet (A), fully extend drawers and locate the plastic levers on left and right sides of the metal glide tracks. Push the plastic levers, on both sides, at the same time. This will disengage the drawer box from the glides. Gently lift up on the drawer to remove it from the glide tracks. Set aside as these will be re-installed.

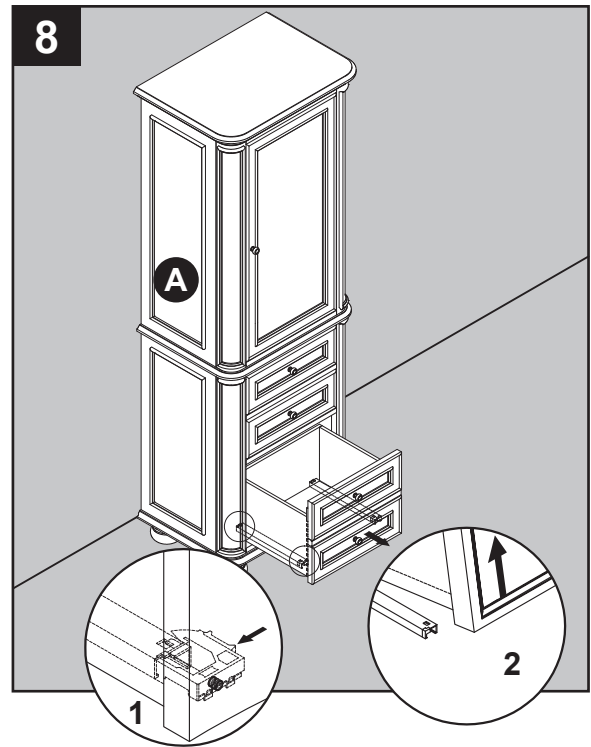

9. To re-install drawers. Fully extend lower drawer glide tracks. With the help of another adult, hold the extended glide in one hand and the drawer in the other. Gently place the back of the drawer box into the metal hook located on the back of the drawer track. Once the glide hook has been slide into the hole in the back of the drawer box, gently lower the drawer box down onto the extended glide tracks. At the same time depress both of the glide handles and allow the drawer box to fully rest on the glide tracks. Test to see if the drawer box is fully engaged. If the drawer box can still be lifted off the glide track then start again from the beginning. Never force anything or else damage to the drawer or glide hardware could result. Repeat for remaining drawers. The drawers location can be adjusted slightly up or down by twisting the adjuster knob next to the glide handles.

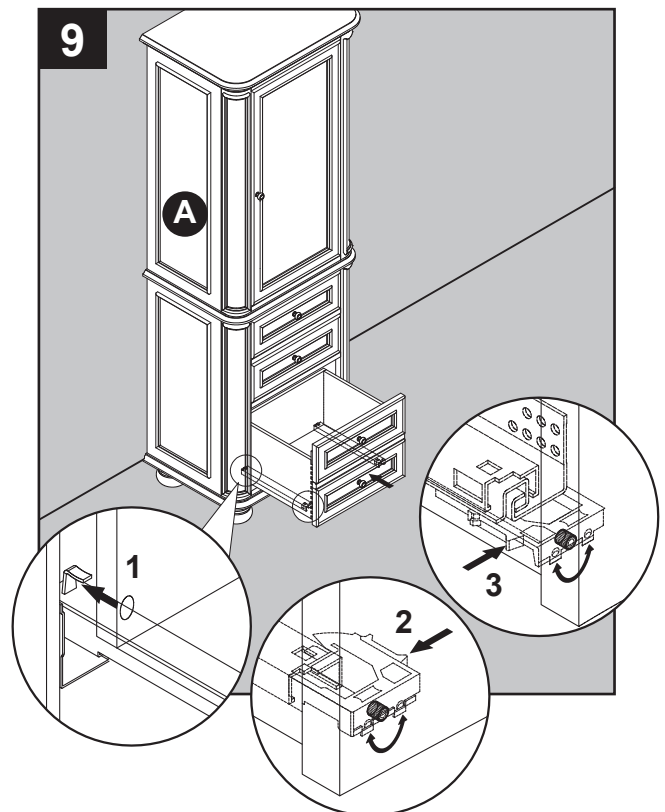

CARE AND MAINTENANCE





- Dust the floor cabinet regularly with a soft, non-lint producing cloth or household dusting product.
- You can clean the floor cabinet with a gentle, non-abrasive household cleaner.
- Make sure to dry the wood immediately with a soft cloth or towel.
- Tips for using touch-up pen (AA): For scratches, stroke in direction of scratch. Rub off excess colorant promptly with a soft cloth.

WARRANTY

The manufacturer warrants this item against defects in materials and workmanship for a period of one (1) year from the date of original retail purchase. This warranty applies only to the original purchaser. This warranty does not apply to any damage on the product by accident, misuse, or modified, improper installation or by affixing accessories not produced by the manufacturer. The manufacturer is not accountable whatsoever for product installation during the warranty period. There is no further expressed warranty. The manufacturer shall not be legally responsible for incidental, consequential or special damages arising at or in connection with product use or performance except as may otherwise be accorded by law. The manufacturer disclaims any and all implied warranties.

REPLACEMENT PARTS LIST FOR 1116FC-25-201

For replacement parts, call our customer service department at 866-439-9800, 8 a.m. - 8 p.m., EST, Monday - Sunday.

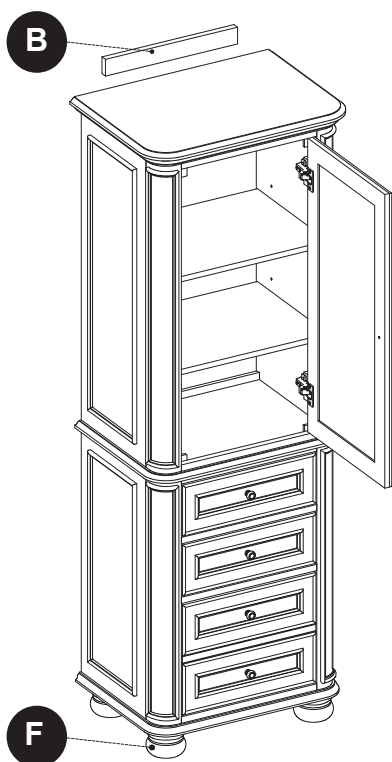

PART	DESCRIPTION	PART#
B	Wall Mounting Spacer Bar	1116FC-25-201-001
F	Foot	PU1116-201-Foot
AA	Touch-up pen	OF-0010
BB	Shelf pin	B1044
GG	Knob (with screw)	PU17-1116-BN
HH	Hinge	PU1116-EU-SC
II	Drawer Glide	PUDTC-14x3-HANDLE
KK	Leveler	T-1007
LL	KD Hardware Pack (CC, DD, EE and FF)	PU17-1116-KD-HARDWARE PACK