


Installation Manual

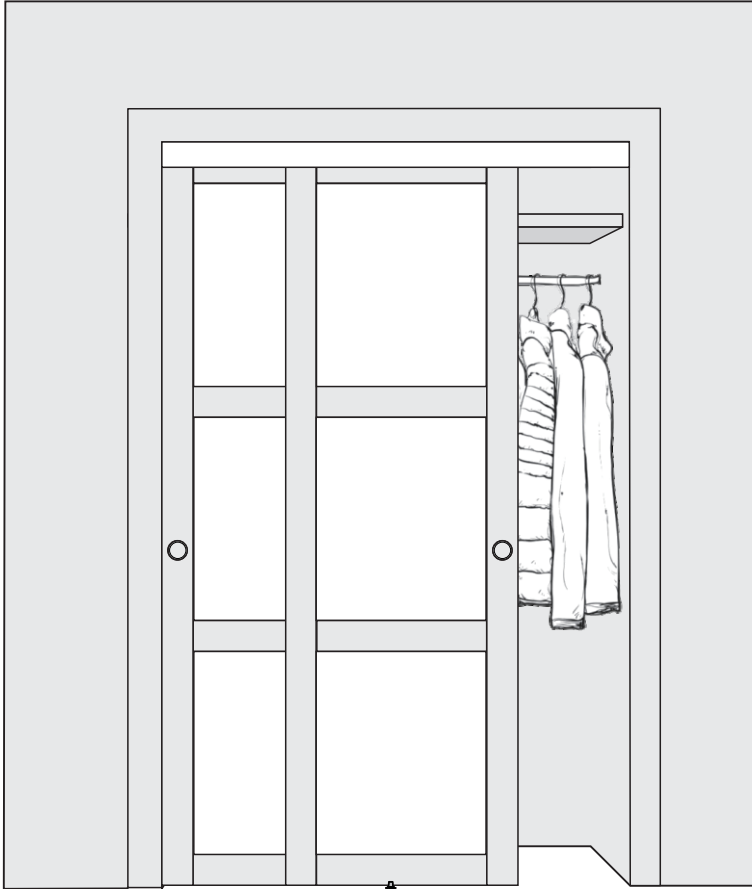

For product assistance and warranty information, please contact us before return this product.

Customer Service: yoursupport@163.com


Please provide us with following information, so that it will be easier to resolve your problem smoothly.

1.Order ID:

2.Pictures of Your Items Damage or Parts Missing:


3. Pictures of all the labels on the package.

Components list



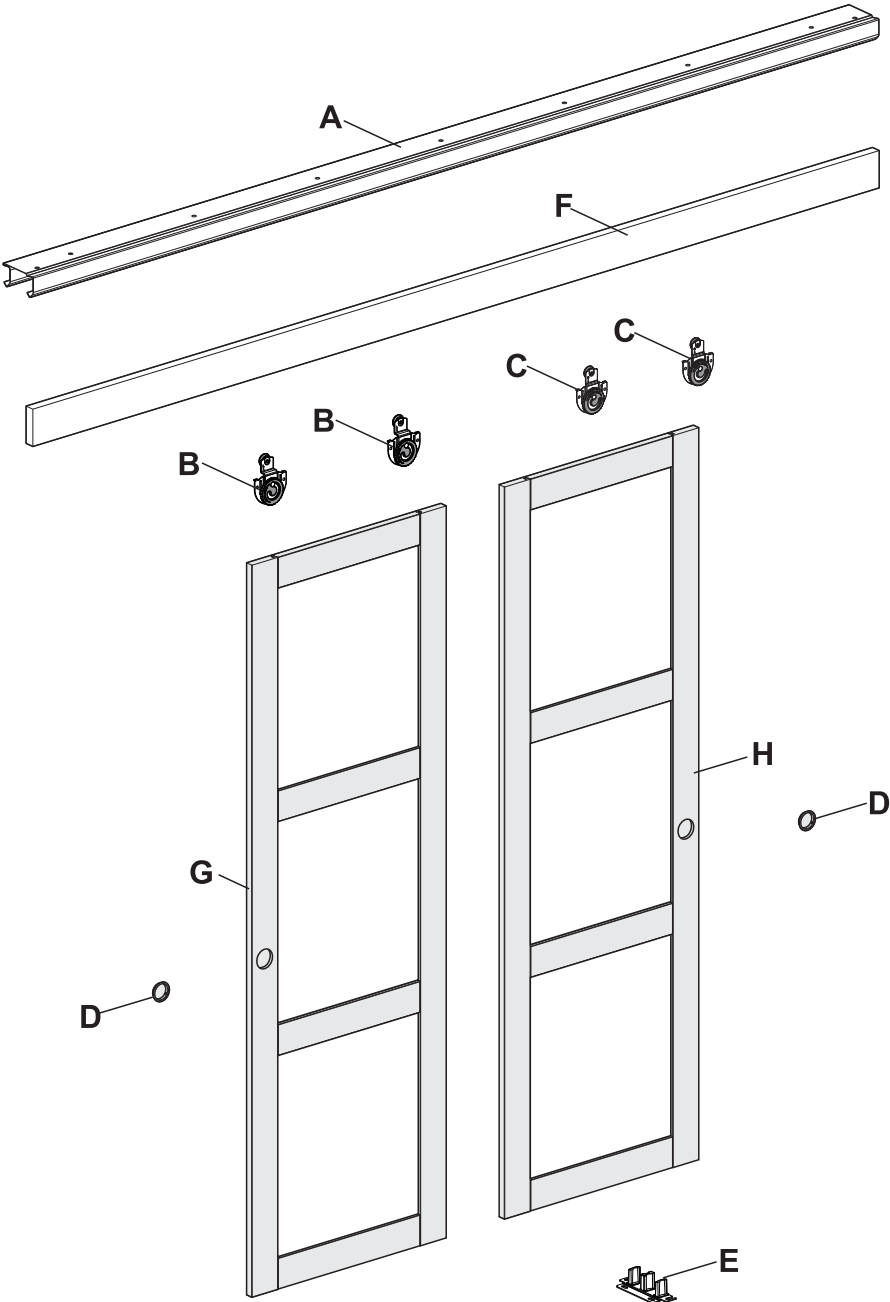


Pre-installation


TOOLS REQUIRED

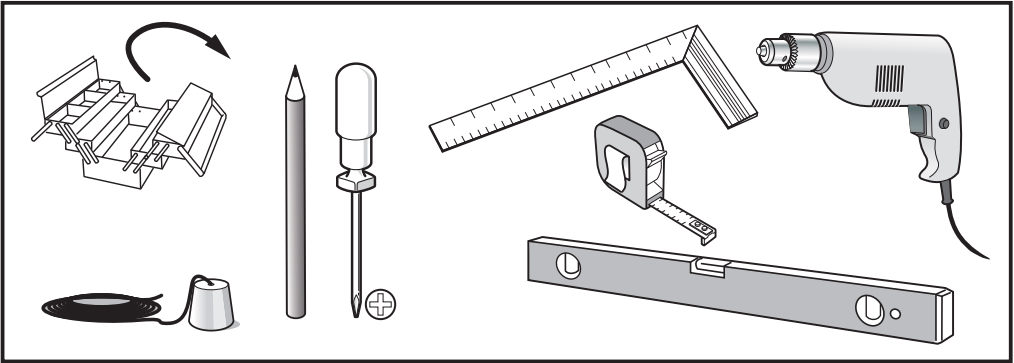

HARDWARE INCLUDED

A Track  ST4.2x38 (x1)		B hanger #1  ST4.2x16 (x4)  (x2)		C hanger #2  ST4.2x16 (x4)  (x2)													
<table><tr><th>Screw Quantity</th><th>Track Length</th></tr><tr><td>(x9)</td><td>48in</td></tr><tr><td>(x10)</td><td>56in</td></tr><tr><td>(x11)</td><td>60in</td></tr><tr><td>(x11)</td><td>64in</td></tr><tr><td>(x13)</td><td>72in</td></tr></table>		Screw Quantity	Track Length	(x9)	48in	(x10)	56in	(x11)	60in	(x11)	64in	(x13)	72in	D Door pull  (x2)		E Floor guide  (x1)  ST4.2x16 (x2)	
Screw Quantity	Track Length																
(x9)	48in																
(x10)	56in																
(x11)	60in																
(x11)	64in																
(x13)	72in																
F Cover Plate  (x1)		G Stopper  (x2)  M4x20(x4)															


Pre-installation

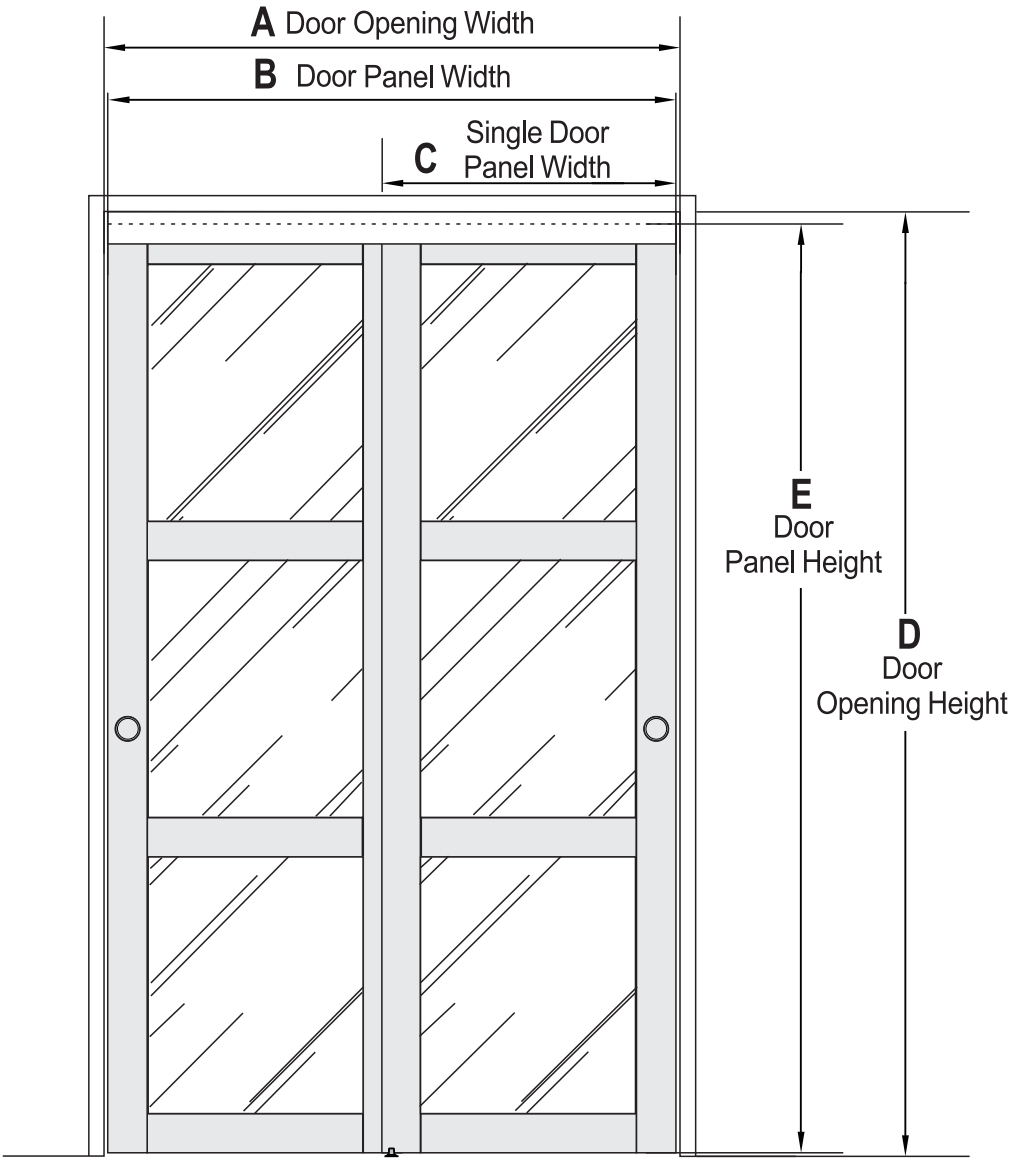

Pre-installation

Option Size		48in * 78 ³ / ₄ in	56in * 78 ³ / ₄ in	60in * 78 ³ / ₄ in	64in * 78 ³ / ₄ in	72in * 78 ³ / ₄ in
A	Door Opening Width	46in - 48in	54in - 56in	58in - 60in	62in - 64in	70in - 72in
B	Door Panel Width	48in	56in	60in	64in	72in
C	Single Door Panel Width	25in	29in	31in	33in	37in
D	Door Opening Height	80 ⁵ / ₈ in ± 1 ¹ / ₈ in	80 ⁵ / ₈ in ± 1 ¹ / ₈ in	80 ⁵ / ₈ in ± 1 ¹ / ₈ in	80 ⁵ / ₈ in ± 1 ¹ / ₈ in	80 ⁵ / ₈ in ± 1 ¹ / ₈ in
E	Door Panel Height	78 ³ / ₄ in	78 ³ / ₄ in	78 ³ / ₄ in	78 ³ / ₄ in	78 ³ / ₄ in

⚠ If the track is too long, you can cut it short.

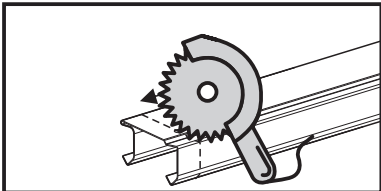


Door panel installation

Notice:


Some door panels of specific sizes come pre-installed. If your door arrives already assembled, skip the installation steps for the door panel.

PARTS			QTY	PARTS			QTY
A1	Door Stile 1		2	B3	Middle Rail		4
A2	Door Stile 2		1	C	Middle Panel		6
A3	Door Stile 3		1	D	Corks		32
B1	Top Rail		2	E	Screws		16
B1	Bottom Rail		2	F	Plastic Plugs		16

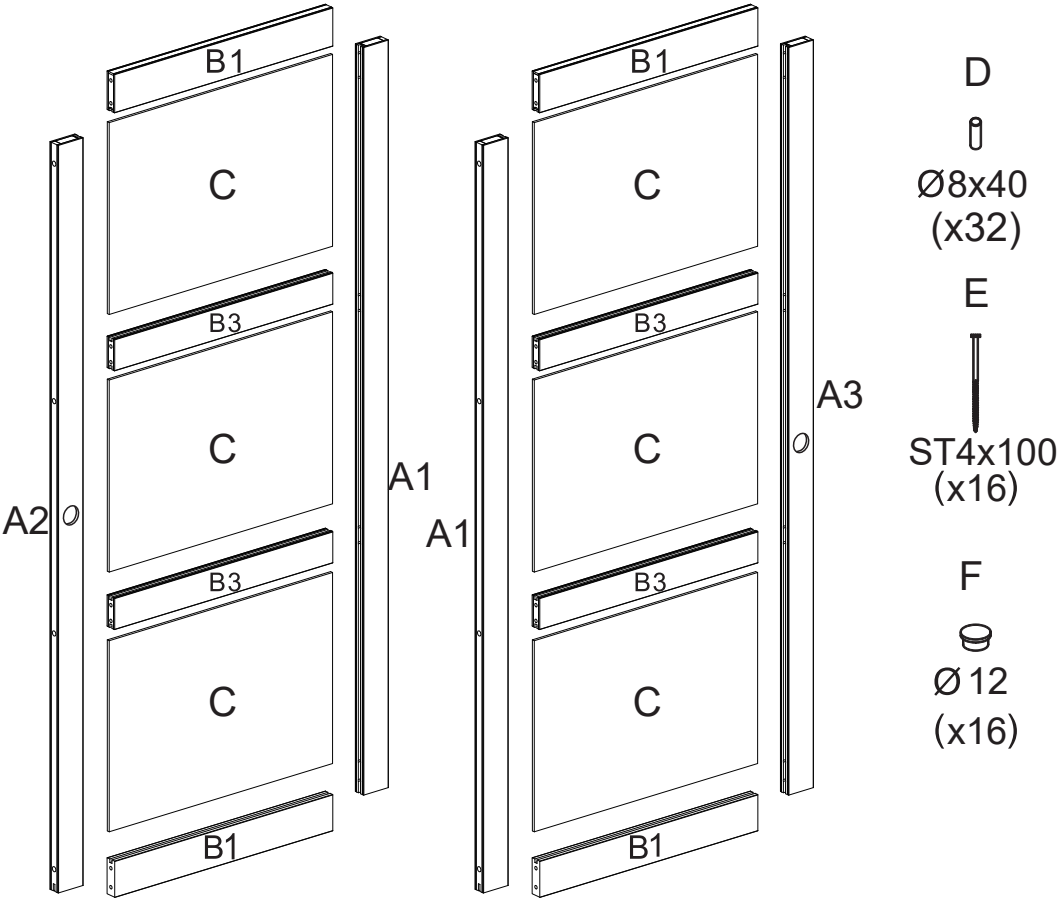


Step-1

On the flat, lay out one side stile (A1) with the groove facing to the right. Assemble top rail (B1), middle rail(B3) and bottom rail (B1) to A1 with corks (D).

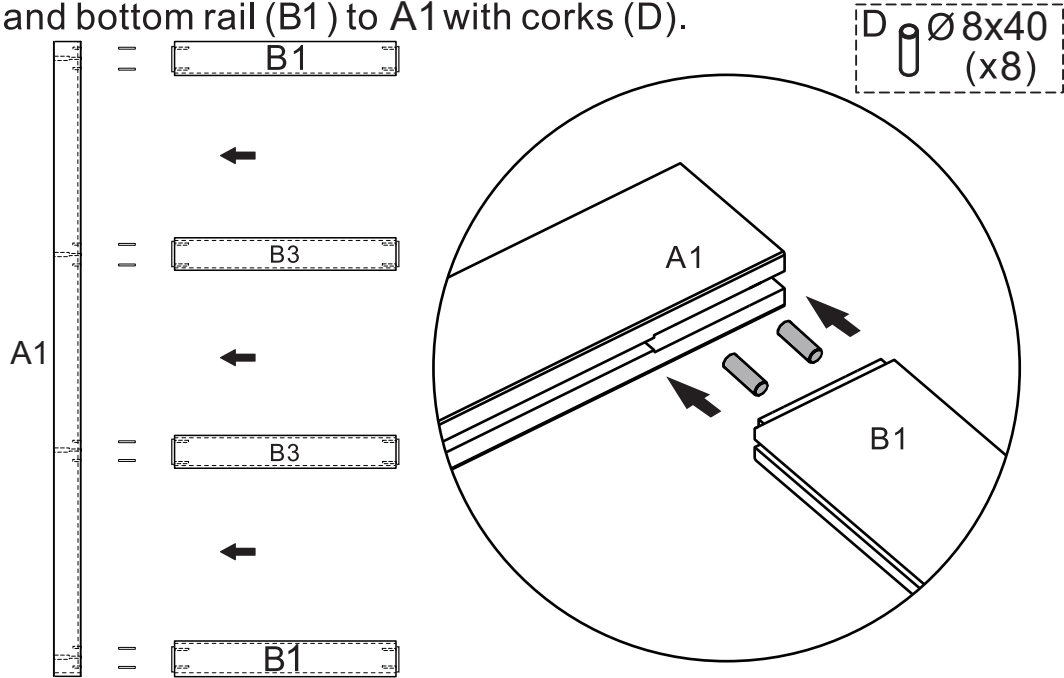


Step-2

Assemble the middle panels (C).

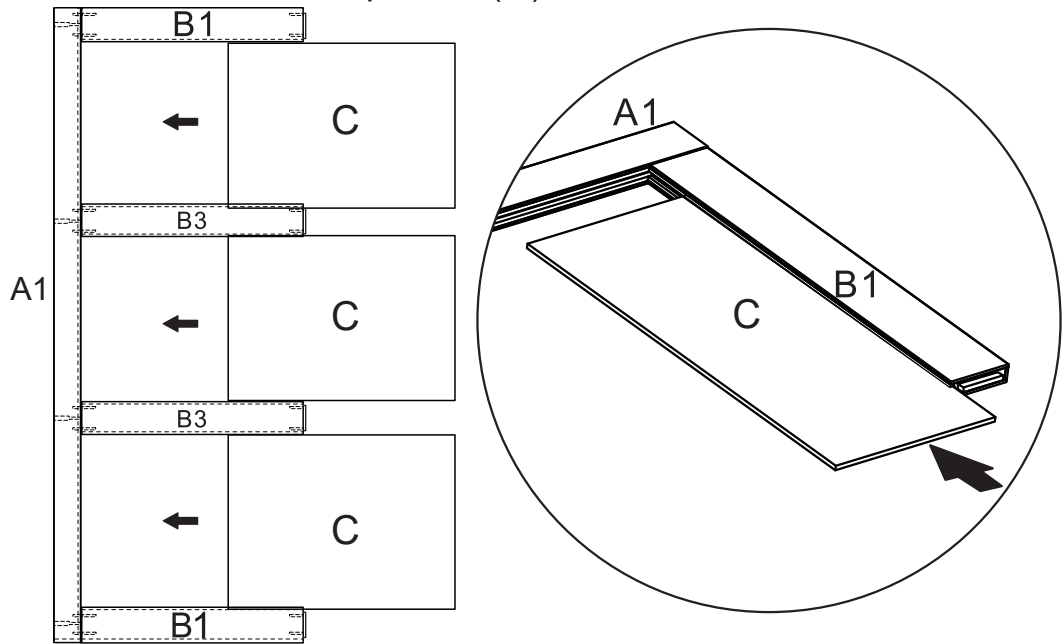


Step-3

Assemble the right side stile (A2/A3) with corks (D) to cover the top and bottom rail and the edge of the slats assembled.

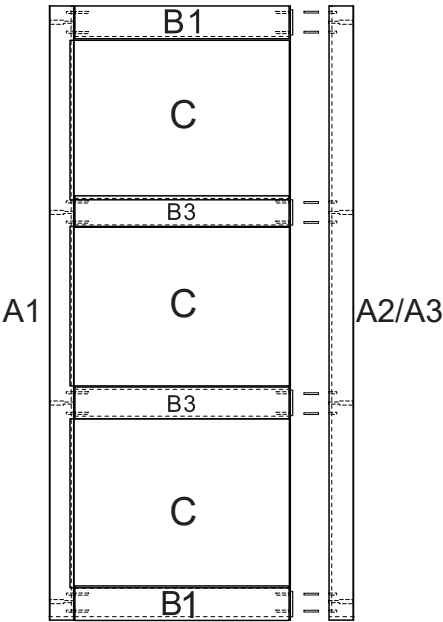



D  Ø 8x40
(x8)

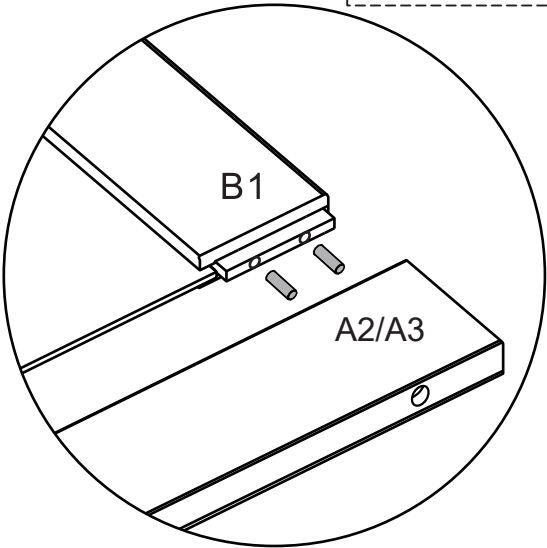

Step-4

Lock screws (E) to side stile (A1 and A2/A3).

E  ST4x100
(x8)

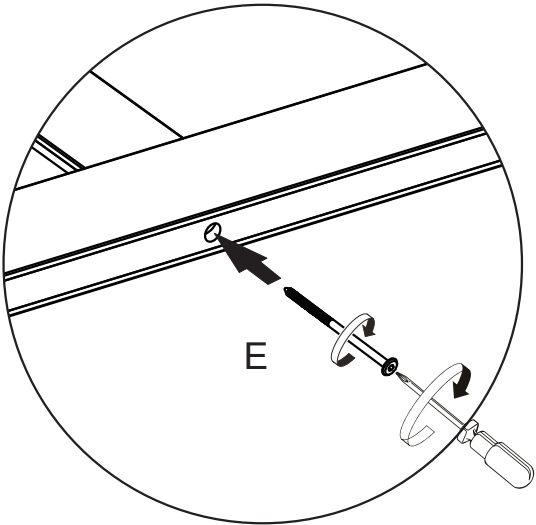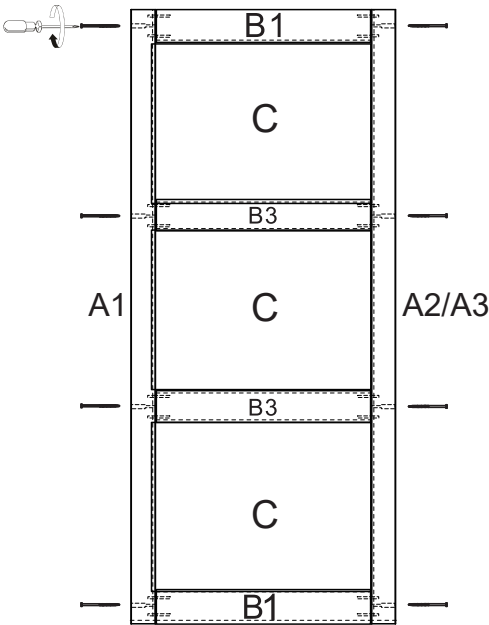

Step-5



Cover the plastic plugs (F).

F





Ø12

(x8)

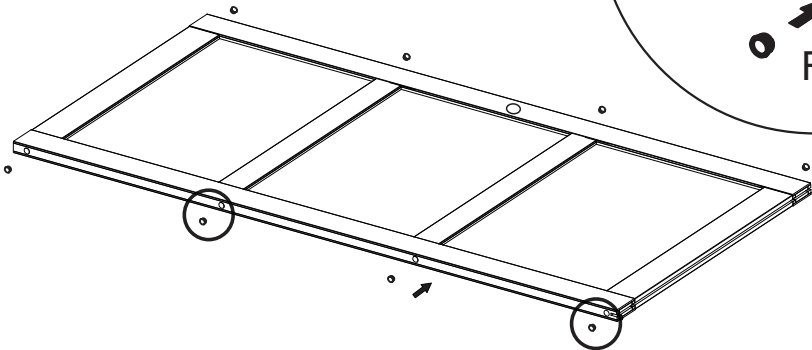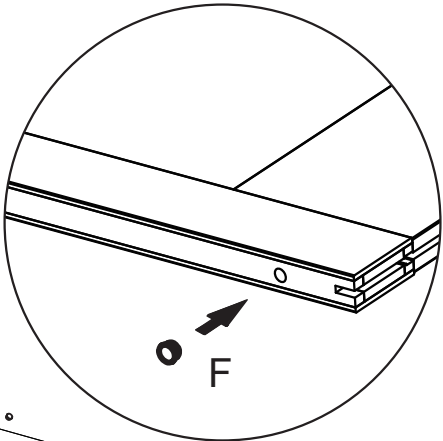


Hardware installation

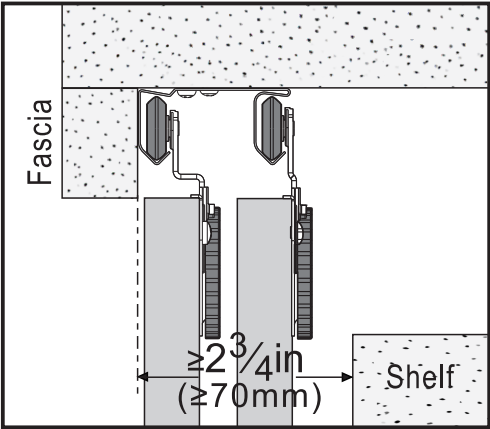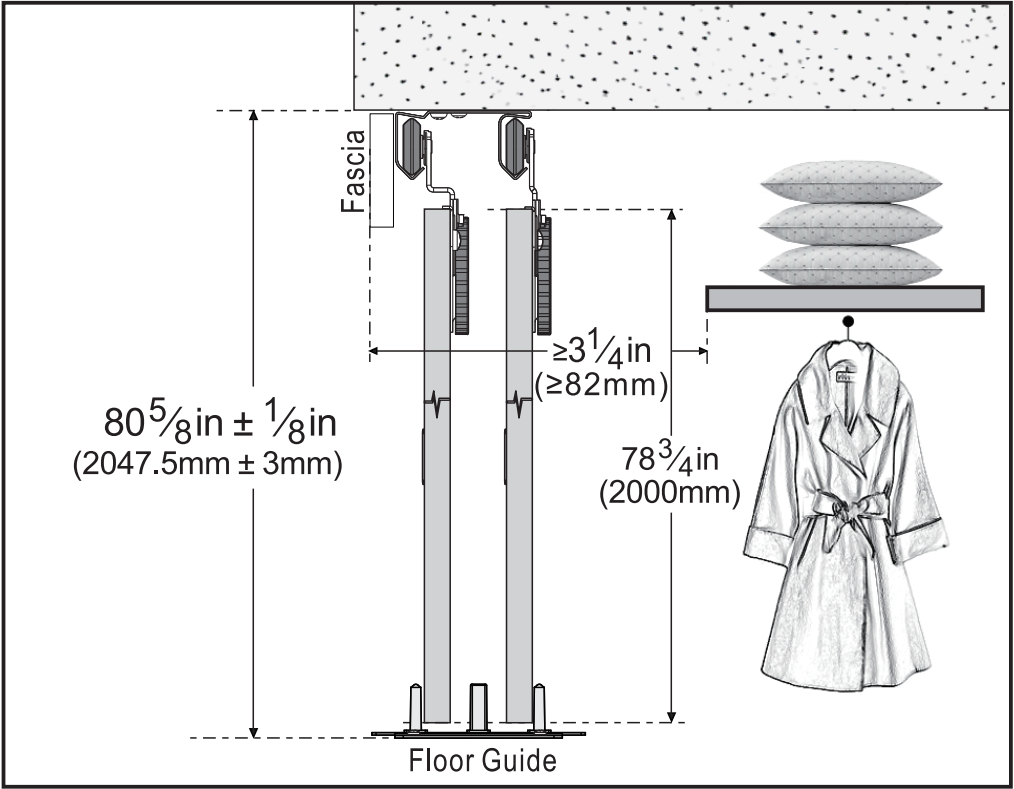



If there is a fascia in the wardrobe, the track can be installed directly next to the existing fascia.

Hardware installation

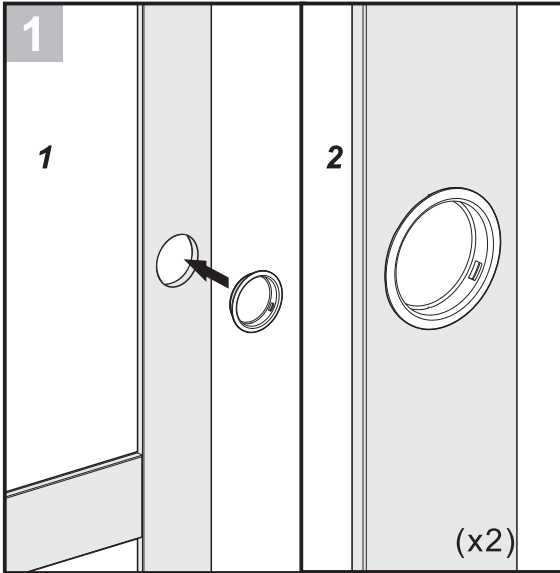

INSTALLATION OF DOOR PULLS

Insert door pull into each hole.

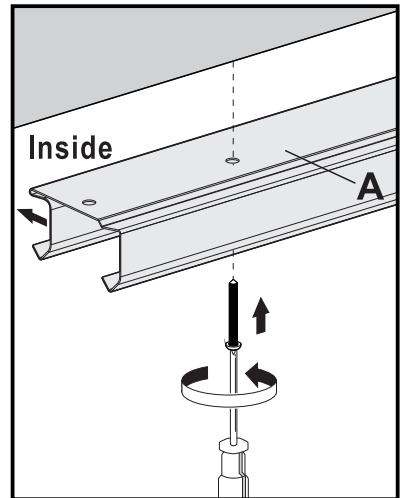
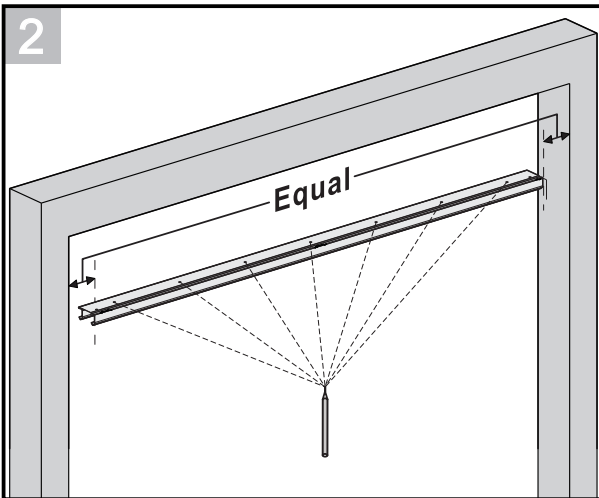


INSTALL TRACK


Place track on door header, centered between both door jambs. Make sure track openings are facing inside of closet. With track as template, mark location of screw holes. Drill 3/32 in pilot holes to approximate screw length. Using supplied #8 x 1-1/2 in screws, securely attach track to header.

Hardware installation


For 4-Door Set Only

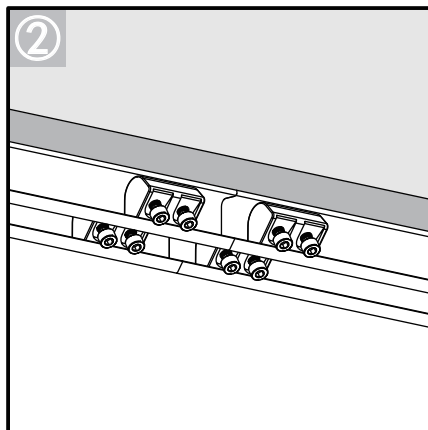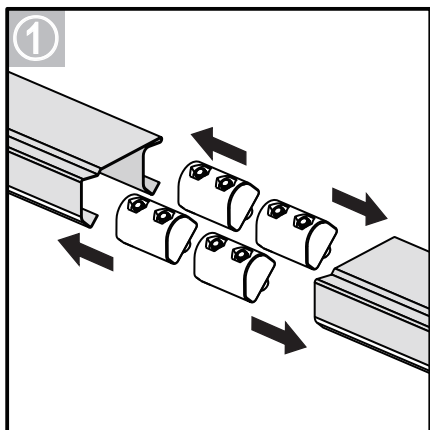

G




(x4)

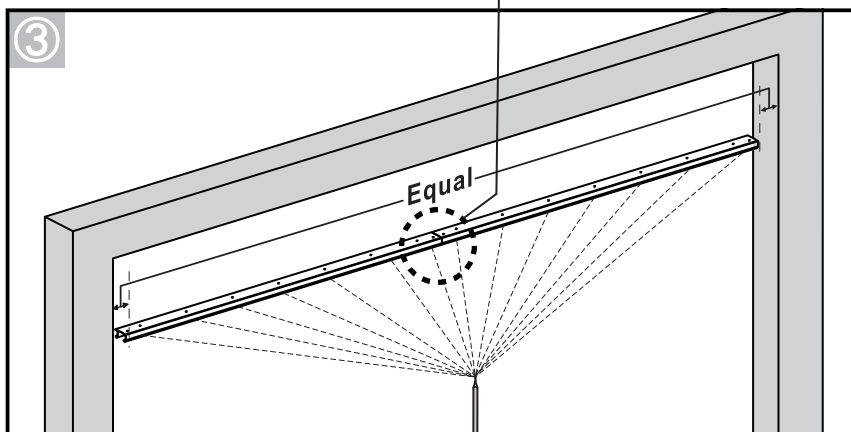

Notice:


If you are installing four door panels, insert the stopper into the track before installation, position it at the center between the two tracks, but do not tighten the screws yet.

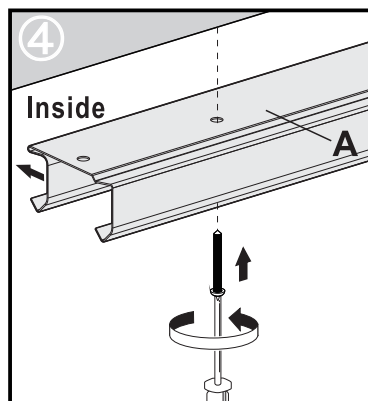

INSTALL TRACK


Place track on door header, centered between both door jambs. Make sure track openings are facing inside of closet. With track as template, mark location of screw holes. Drill $\frac{3}{32}$ in pilot holes to approximate screw length. Using supplied #8 x 1-1/2 in screws, securely attach track to header.

Hardware installation

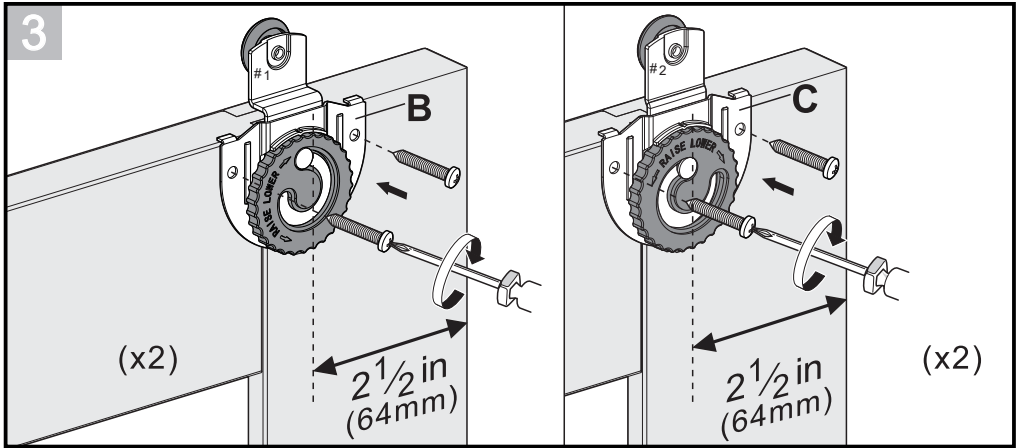

ATTACH DOOR HANGERS


Fasten hangers to top/back of door panel, using supplied #8 x 5/8 in screws. Dial adjust hangers must be 2-1/2 in from edge of door. Using hanger as template, mark screw hole locations. Drill a 3/32 in pilot hole to approximate screw length. Securely attach hangers with supplied screws.

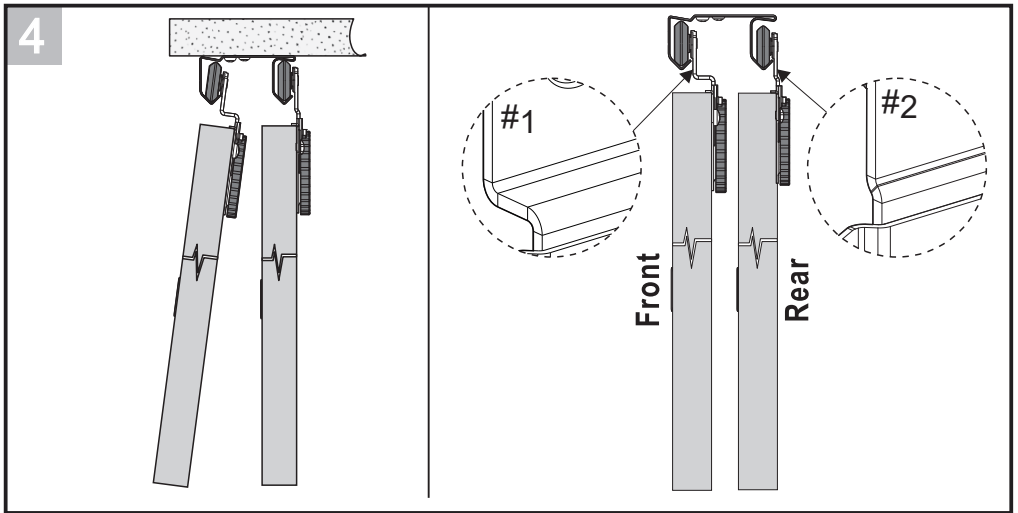

INSTALL DOORS


Hang doors on track. Start with inside (or rear) door first. Door must be positioned at an angle of approximately 15 degrees to engage track. Doors require the installation of panel with #2 hanger first.

Hardware installation

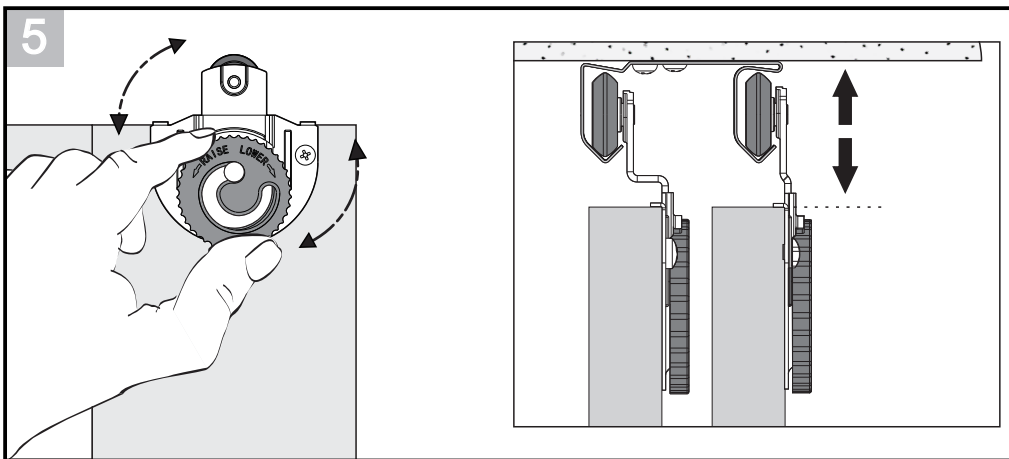

DOOR ADJUSTMENT/DIAL ADJUST

Align doors with frame by lifting one side of door, removing weight from hanger. Turn dial until doors are vertically aligned with frame. Release door so that it returns to original position.

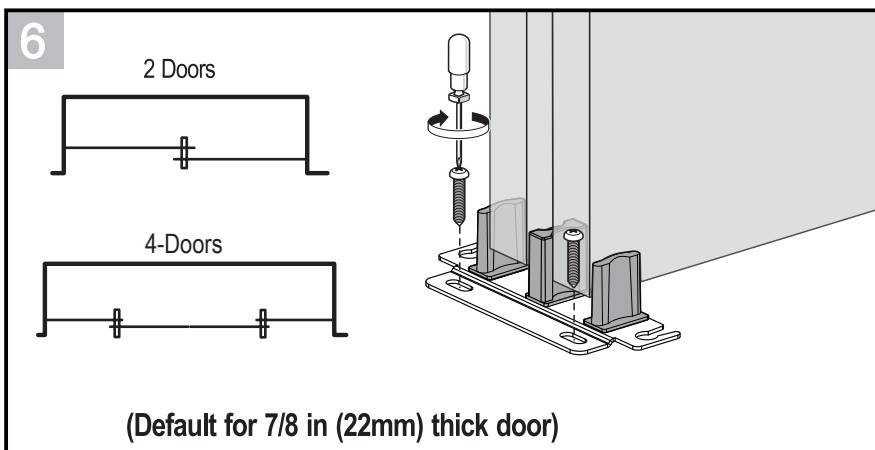

INSTALL DOOR GUIDE



Insert nylon post section into metal plate of door guide, according to thickness of door. Position the guide beneath overlap of doors, as shown. Using supplied #8 x 5/8 in screws, securely fasten guide to floor.

NOTE:

To elevate guide, use a carpet riser as needed.

Hardware installation


7 For 4-Door Set Only

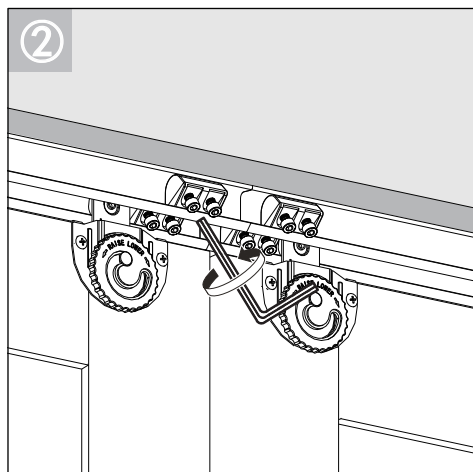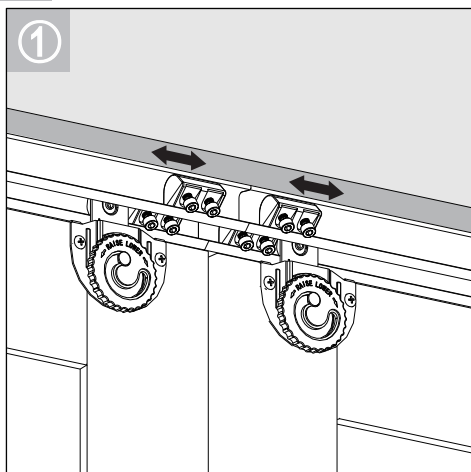


Adjust the stopper: Move the stopper to the correct position and tighten the screws to prevent the door from coming off the floor guide during use.

8

F
(x1)

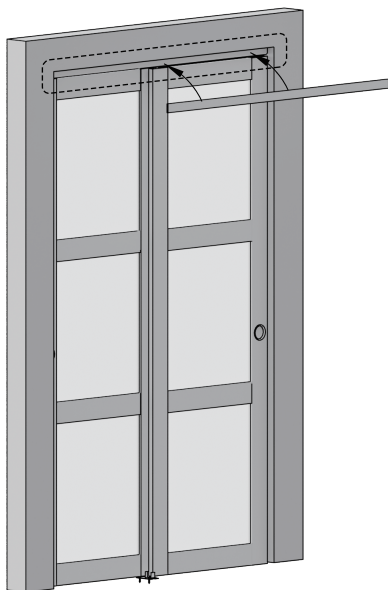

①

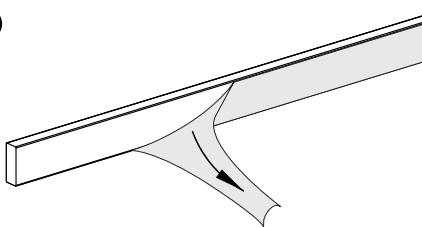

②

