


Assembly and Installation Instructions

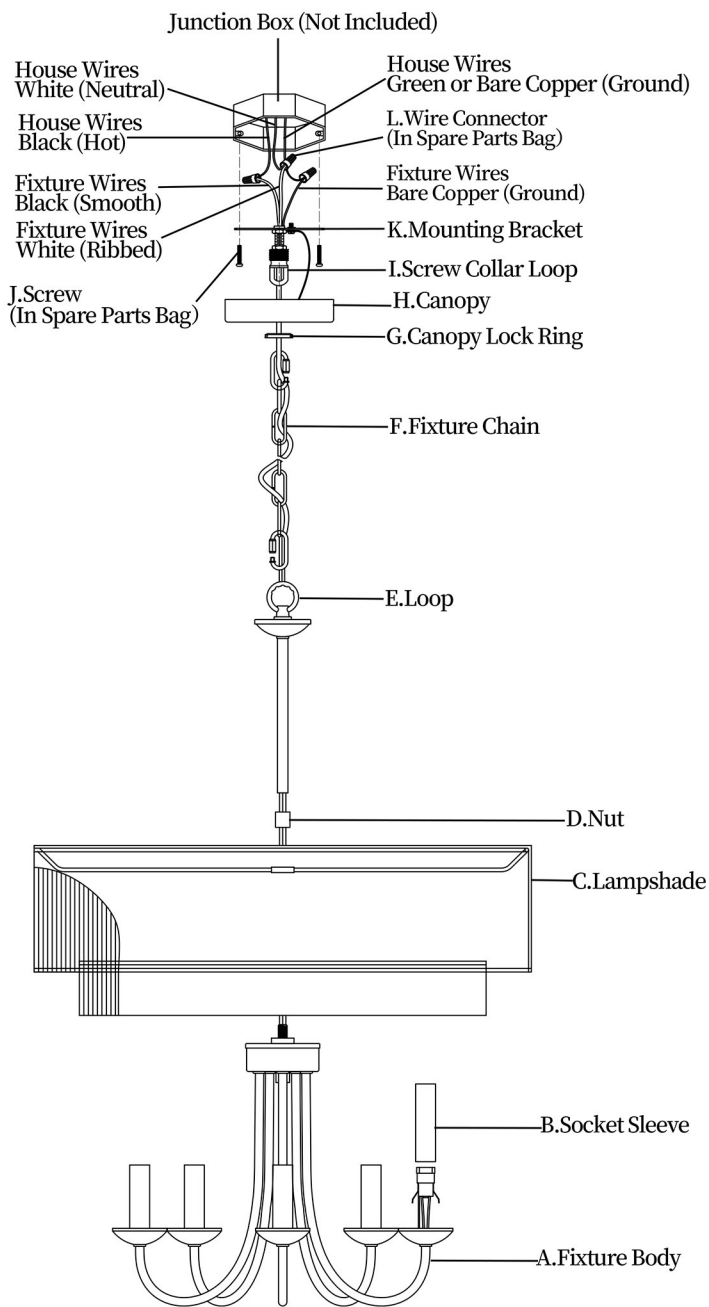

Warning

1. To prevent electrical shock, always turn off the power at the circuit breaker before installing or servicing this chandelier.
2. It is highly recommended to consult a professional electrician to ensure that the branch circuit conductor is correctly installed and to assist with complex installations.
3. For added safety during installation, consider wearing appropriate protective gear such as gloves and safety glasses.

4. It is advisable to have an assistant to help with handling and securing the chandelier during installation.

Tools Required

- Step ladder
- Phillips head screwdriver
- Pliers
- Wire strippers
- Voltage tester
- Measuring tape (to adjust height)

Package Contents

- Fixture Body x 1 & Lampshade x 1
- Nut x 1 & Loop x 1 & Fixture Chain x 1
- Canopy x 1 & Canopy Lock Ring x 1
- Mounting Bracket x 1
- Spare Parts Bag x 1
- Assembly and Installation Instructions x 1

Product Specifications

5-Light Chandelier

Bulbs Required: 5 candelabra (E12) bulbs, max 60W each (bulbs not included)

Voltage: 120V

Assembly Instructions

1. Unpack the fixture carefully, checking all parts for completeness and free of damage. If any parts are missing or damaged, please reach out at your earliest convenience for a resolution.
2. Prior to assembly, use a measuring tape to determine the desired chain length for the optimal hanging height.
3. Unfold the Fixture Body (A) and evenly distribute the candle bases around the fixture.
4. If the socket sleeves (B) appear misaligned, gently adjust their positions by moving them forward, backward, or side to side until they are properly aligned.

5. Remove the nut (D) from the fixture wires. Thread the fixture wires through the lampshade (C) and secure it with the nut (D).
6. Thread the fixture wires through the loop (E) and the fixture chain (F). Attach the loop (E) to the fixture body (A) and secure the fixture chain (F) to the top end of the loop (E).
7. Loosen the canopy lock ring (G) and set aside both the canopy (H) and the lock ring (G).

Installation Instructions

1. Before beginning the installation, use a voltage tester to confirm that no power is reaching the junction box. Additionally, ensure the junction box is secure and that no wires are exposed.
2. Attach the mounting bracket (K) to the ceiling junction box using the provided screws (J), making sure it is securely fastened.
3. Carefully thread the fixture's wires through the following components in this order: the canopy lock ring (G), the canopy (H), the screw collar loop (I), and finally the mounting bracket (K).

4. Wire Connection Steps:

- a. Locate the wire connectors (L) included with the fixture.
- b. Attach the fixture's ground wire to the green screw on the mounting bracket (K). To do this, wrap the ground wire clockwise around the green screw, ensuring it is securely in contact with the screw. Tighten the screw firmly to secure the ground wire. **Ensure there is enough excess ground wire for a secure connection to the house's ground wire.**
- c. Connect the fixture wires to the house wires as follows: black (hot) to black (smooth), white (neutral) to white (ribbed), and green/bare copper (ground) to bare copper (ground).
- d. Align the ends of each wire pair and insert them together into the wire connector (L). Twist the connector (L) until it is tight. A secure connection is indicated when the wires remain firmly connected when tugged lightly. Repeat this process for each wire pair.
5. Gently raise the canopy (H) along the screw collar loop (I) towards the ceiling. Secure it in place by tightening the canopy lock ring (G) onto the screw collar loop (I).

6. Attach one end of the fixture chain (F) to the screw collar loop (I), ensuring it is properly hooked and secure to prevent the fixture from falling.
7. Once the chandelier is securely installed, carefully screw in the light bulbs, ensuring not to exceed the recommended wattage.
8. Restore power at the breaker and maintain a safe distance from the fixture until it is confirmed to be functioning correctly.

Friendly Reminder

1. After installation, it is normal for the chandelier to appear slightly uneven. Due to the unique materials used, slight variances are typical and add to the chandelier's character. Gently adjust the shades to achieve a balanced appearance.
2. If you experience any difficulties during installation, please don't hesitate to seek assistance. We are committed to ensuring your installation is smooth and successful.

Maintenance Instructions

1. Periodically inspect the chandelier for any loose connections or signs of wear. Secure any loose parts and promptly replace worn components to extend the chandelier's lifespan.
2. Clean the chandelier with a soft, dry cloth, or use a feather or microfiber duster. Avoid using liquid cleaners or abrasive materials.
3. When replacing bulbs, ensure the chandelier is switched off and cooled down before handling. Use bulbs with the appropriate wattage to avoid heat damage.
4. This chandelier is designed for indoor use in dry conditions only. Exposure to outdoor or humid environments may cause damage.