


INSTALLATION MANUAL


CEILING FAN WITH LIGHT

Model No.: LL-8838D-60-04



Scan for Installation Video


Thank you for choosing and using our product.

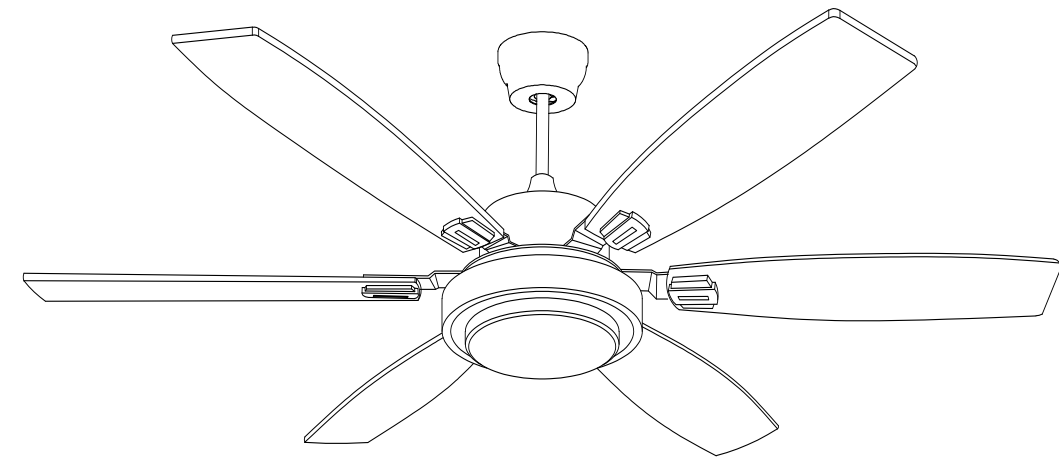


TOOLS REQUIRED




Ladder



Pliers




Wire
Strippers











Screwdrivers

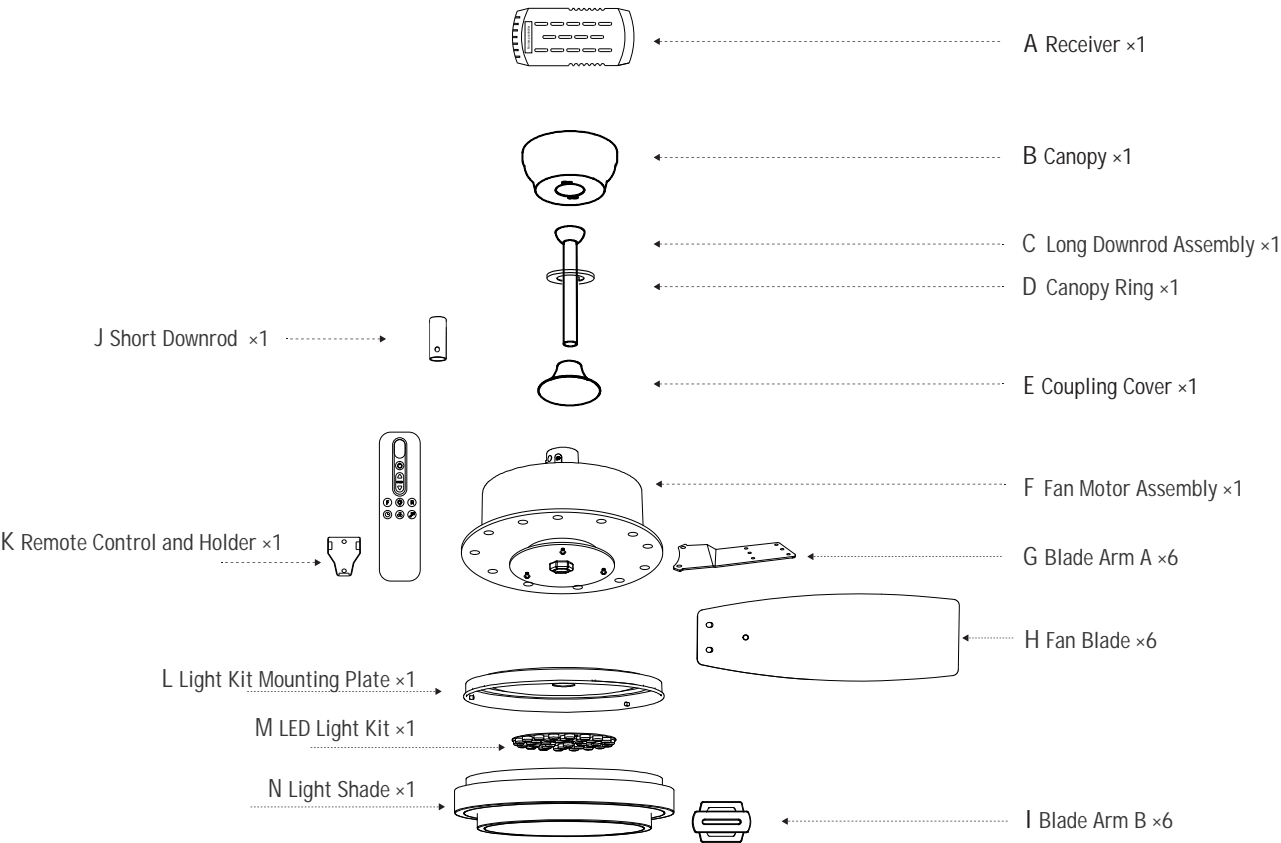PACKING LIST



INSTALLATION KIT

AA  Wire Nut 3×	BB  Fan Blade Screw 18×	CC  Gloves 1×	DD  Fan Blade Arm Screw 12×
EE  Mounting Bracket 1×	FF  Outlet Box Screw With Washer 2×	GG  Clevis Pin & "R" Pin 1×	HH  Magnet 2×

NOTE:

1. Some extra hardware may be included. The quantity listed above is the number required for installation.


2. Parts "GG" have already been installed with Long Downrod Assembly, parts "DD" have been installed with Fan Motor Assembly. They need to be disassembled before installation.

REMOTE CONTROL INSTRUCTIONS

- ① : Turn off power.
- ② : Turn on the fan on 1/2/3/4/5/6 speed.
- ③ : Fan moves forwards.
- ④ : Timing the fan.
- ⑤ : Turn on / off the light.
- ⑥ : Fan moves reversely.
- ⑦ : Natural wind, fan speed will change automatically with this function (Short Press).
Turn on/off the mute mode (Long Press).
- ⑧ : Turn off the fan.


REMOTE SIGNAL PAIRING:

If the remote control loses signal of the fan, press and hold the button ⑤ at the very beginning after it's turned on from wall switch. After the fan light flashes or beeps, it's done.

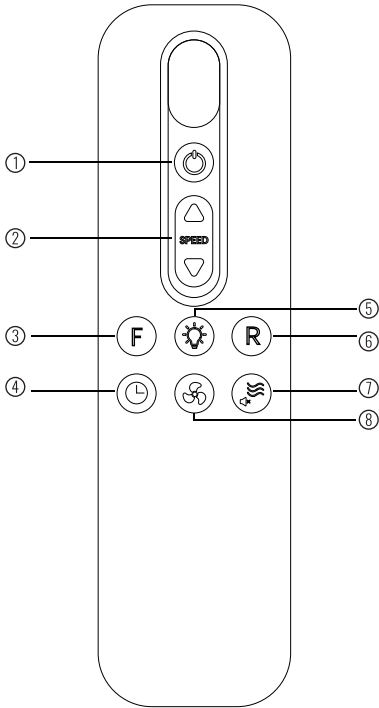


7. Install the Light Kit Mounting Plate

- Step 1. Take off the set screws from Fan Motor Assembly.
- Step 2. Secure the Light Kit Mounting Plate onto the Fan Motor Assembly with screws taken off.

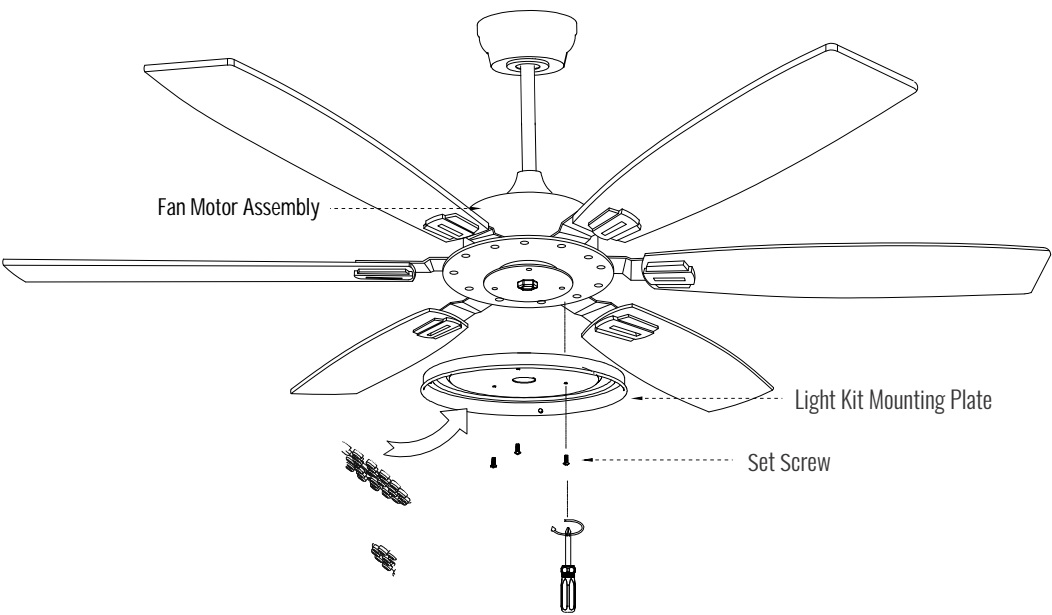

8. Install the Light and Light Shade


- Step 1. Connect the wire terminal to the interface on the LED Light Kit.
- Step 2. Rotate the Light Shade clockwise to secure it to the Light Kit Mounting Plate.

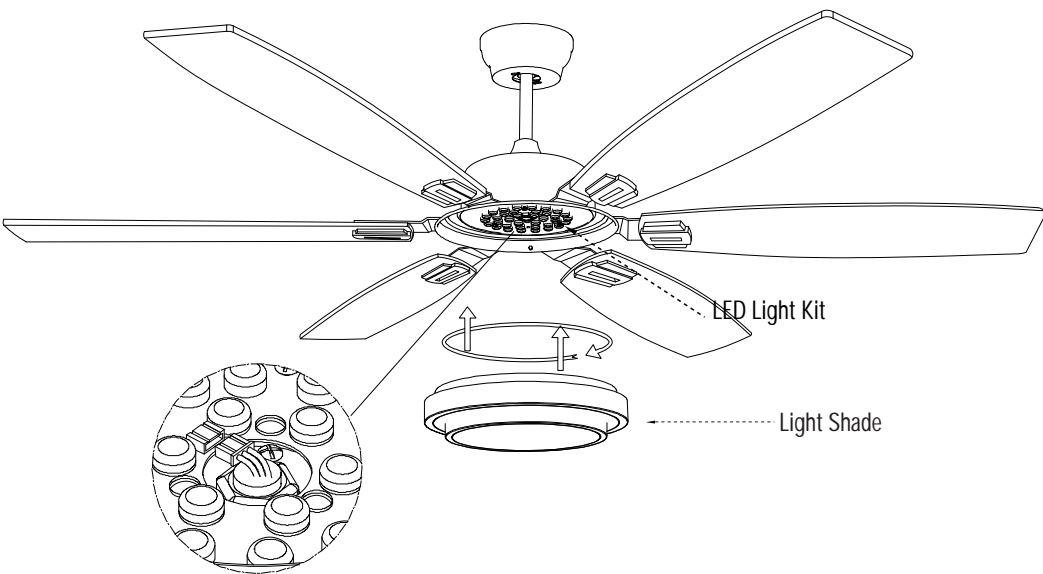

INSTALLATION


1. Assembling the Fan

- Step 1. Assemble the Canopy and coupling cover, route wires from the fan through the downrod.
- Step 2. Loosen the set screw from the yoke but do not take off, align the holes at the bottom of the downrod with those in the yoke.
- Step 3. Carefully insert the clevis pin (GG) through the holes in the yoke and downrod (Be careful not to jam the clevis pin against the wires inside the downrod).
- Step 4. Insert the "R" pin (GG) into the end of the clevis pin.
- Step 5. Tighten the set screw on the yoke to secure the downrod.

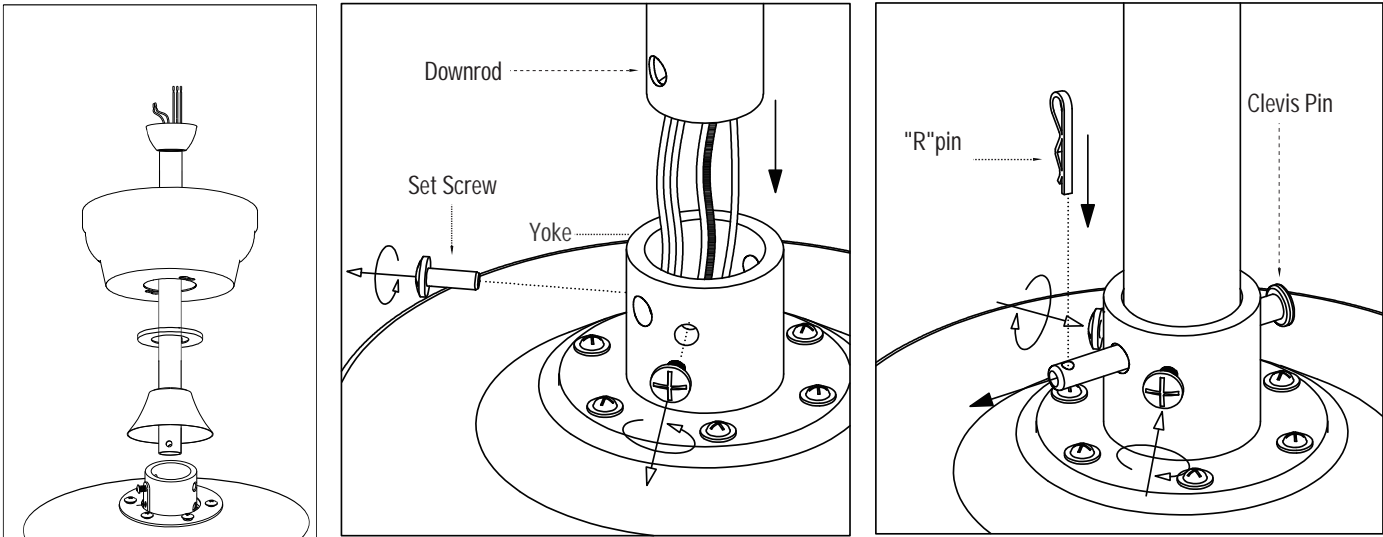


2. Installing the Mounting Bracket

- Step 1. Take off the screws from outlet box.
- Step 2. Secure the mounting bracket (EE) onto the outlet box with screws taken off or Outlet Box Screw With Washer (FF) provided.

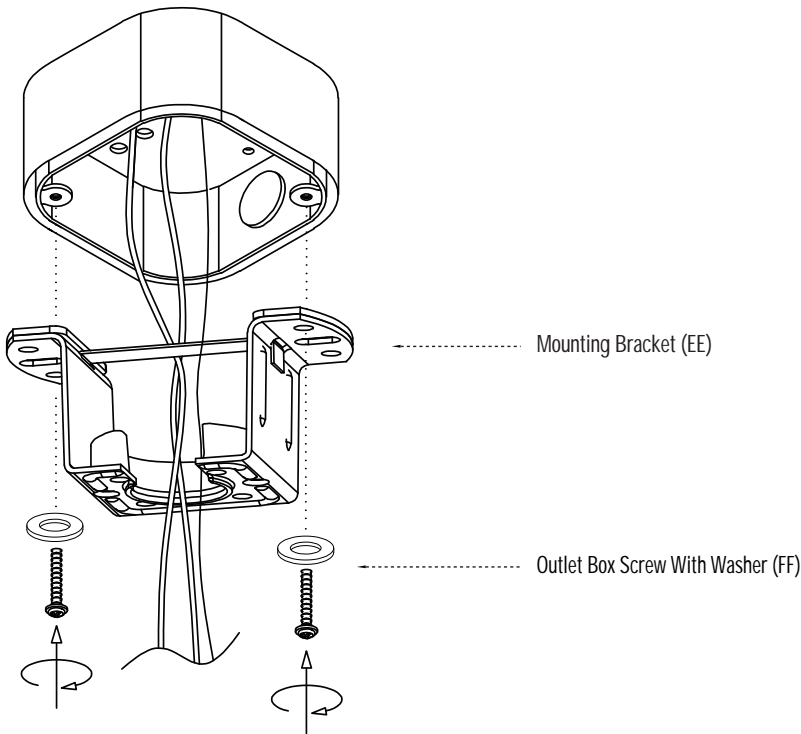

3. Hanging the Fan

Step 1. Lift the downrod into the mounting bracket. Rotate the downrod until the seat tab in the mounting bracket is seated in the groove in the downrod ball.

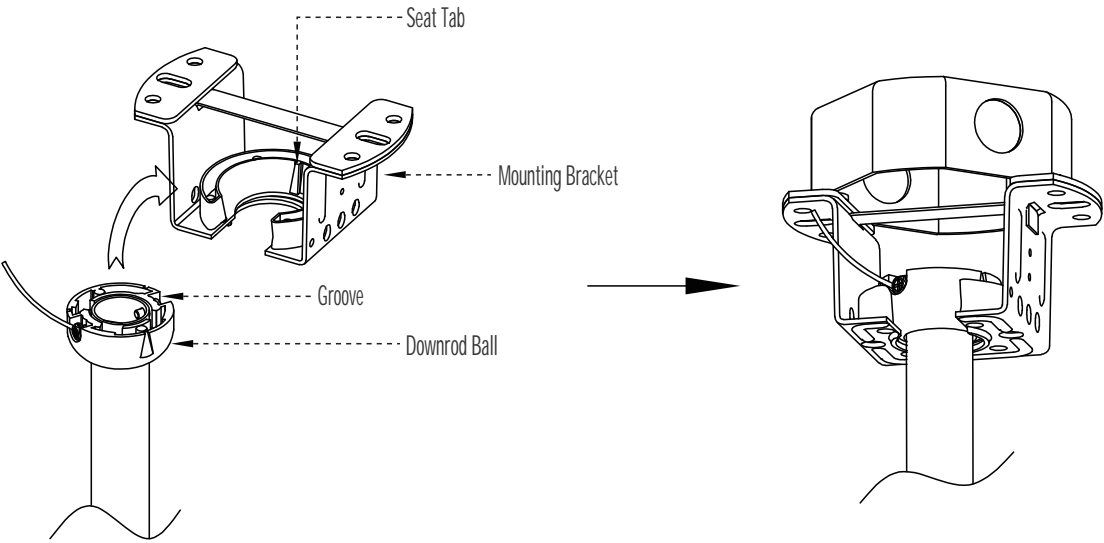


4. Wiring

Step 1. Insert the receiver to the mounting bracket

Step 2. Connect the wires from the fixture to the house supply wires with wire nuts (AA) , ground wire (green, green/yellow, or bare copper) to ground wire, neutral wire (white or blue) to neutral wire, and hot wire (black or brown) to the hot wire.

Step 3. Wrap the connection with electrical tape.

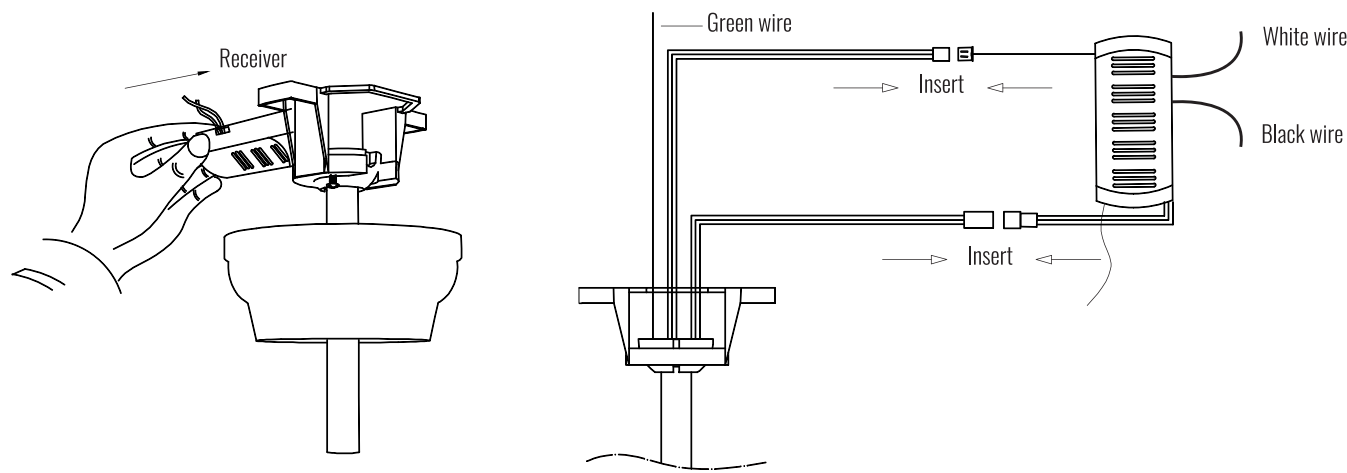


- Note:
- ① This fan only needs one set of input wires (black, white, and ground wire). Both of the fan and lights will be controlled by the remote control.
 - ② This fan can only be connected to the ON/OFF switch, not a dimmer switch.

5. Attaching the Canopy

Step 1. Slide the canopy up to the ceiling and attach it to the mounting bracket with the set screws provided.


Step 2. Slide the coupling cover downward to cover the yoke and fix the canopy ring to the canopy with Magnet (HH).

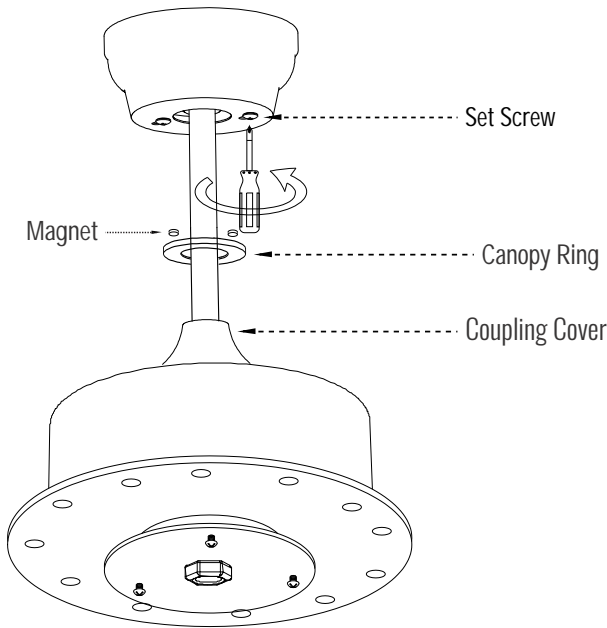

6. Installing the Fan Blade and Blade Arm

Step 1. Attach fan blade onto the blade arms with Fan Blade Screws (BB) provided.

Step 2. Attach the Fan Blade Arm onto the motor with the Fan Blade Arm Screws (DD).

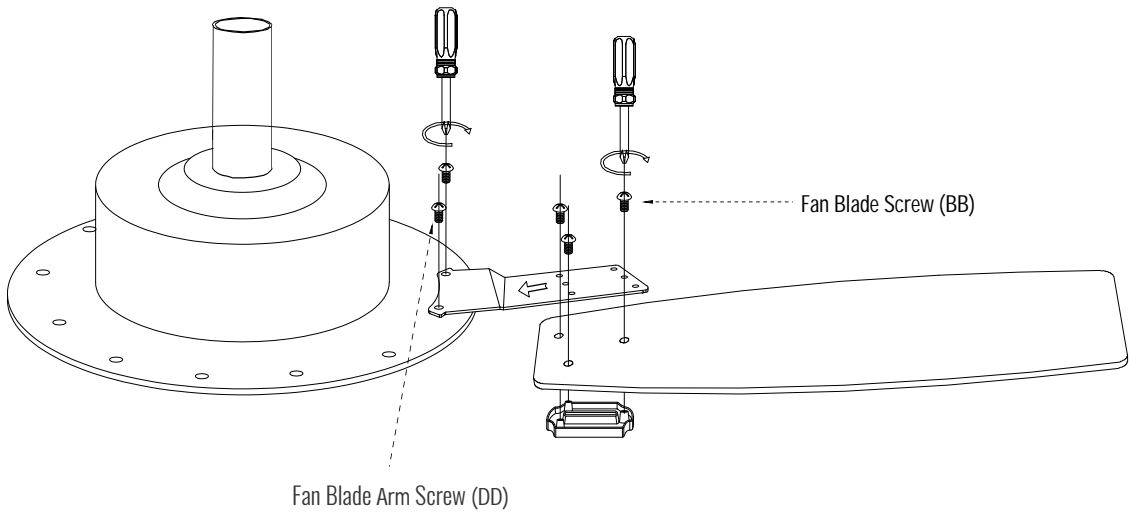

- Note:
- ① Make sure to assemble the blades in sequence and fasten the screws with equal force.