

Features


- Vitreous china
- With bedpan lugs (-L)
- 10" (254 mm) or 12" (305 mm) rough-in
- 1-1/2" top spud
- 11-3/8" (289 mm) x 10-3/8" (264 mm) water area
- 2-1/4" (57 mm) passageway
- 1.6 gpf (6 lpf)
- 26" (660 mm) x 14-1/2" (368 mm) x 16-1/2" (419 mm)

BOWL
K-4302

ADA

CSA B651

OBC

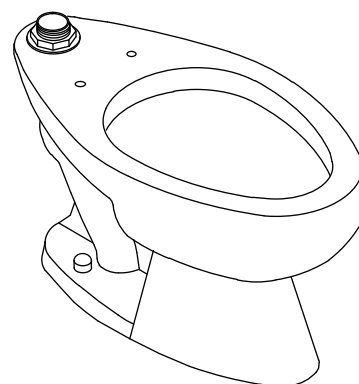

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-4302	Elongated bowl toilet	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4302-L	Elongated bowl toilet with bedpan lugs	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories				
K-4670-C	Lustra™ open front seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-4670-CA	Lustra open front seat with anti-microbial agent	<input type="checkbox"/> 0		
K-10674	WAVE exposed toilet flushometer – 1.6 gpf (6 lpf)			<input type="checkbox"/> CP
K-10957	Touchless DC toilet flushometer – 1.6 gpf (6 lpf)			<input type="checkbox"/> CP
K-13516	Manual toilet flushometer – 1.6 gpf (6 lpf)			<input type="checkbox"/> CP

Product Specification

The elongated bowl shall be made of vitreous china. Bowl shall be 10" (254 mm) or 12" (305 mm) rough-in with a 1-1/2" top spud. Bowl shall be 1.6 gpf (6 lpf). Bowl shall have 11-3/8" (289 mm) by 10-3/8" (264 mm) water area. Bowl shall have 2-1/4" (57 mm) passageway. Bowl shall have bedpan lugs (-L). Bowl shall be 26" (660 mm) in length, 14-1/2" (368 mm) in width, and 16-1/2" (419 mm) in height. Bowl shall be Kohler Model K-4302-_____-_____.

HIGHCREST™

Technical Information

Fixture*:	
Configuration	Top spud, elongated
Water per flush	1.6 gal (6 L)*
Spud size	1-1/2"
Passageway	2-1/4" (57 mm)
Water area	11-3/8" (289 mm) x 10-3/8" (264 mm)
Water depth from rim	6" (152 mm)
Seat post hole centers	5-1/2" (140 mm)
Minimum static pressure required	35 psi (241.3 kPa)
Maximum static pressure	80 psi (551.6 kPa)
Minimum flowing pressure required	25 psi (172.4 kPa)
Required supply minimum	25 gpm (94.6 lpm)
* Designed to flush with 1.6 gal (6 L) of water when installed with a 1.6 gpf (6 lpf) valve.	

Included components:

Spud	18537
Bolt cap accessory pack	1013092

Installation Notes


Install this product according to the installation guide.

Refer to manufacturer and local codes for flush valve requirements: for 12" (305 mm) rough-in, sweat extension nipple is required.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** Barrier Free requirements when installed per Clause 3.8.3.8 and 3.8.3.9.

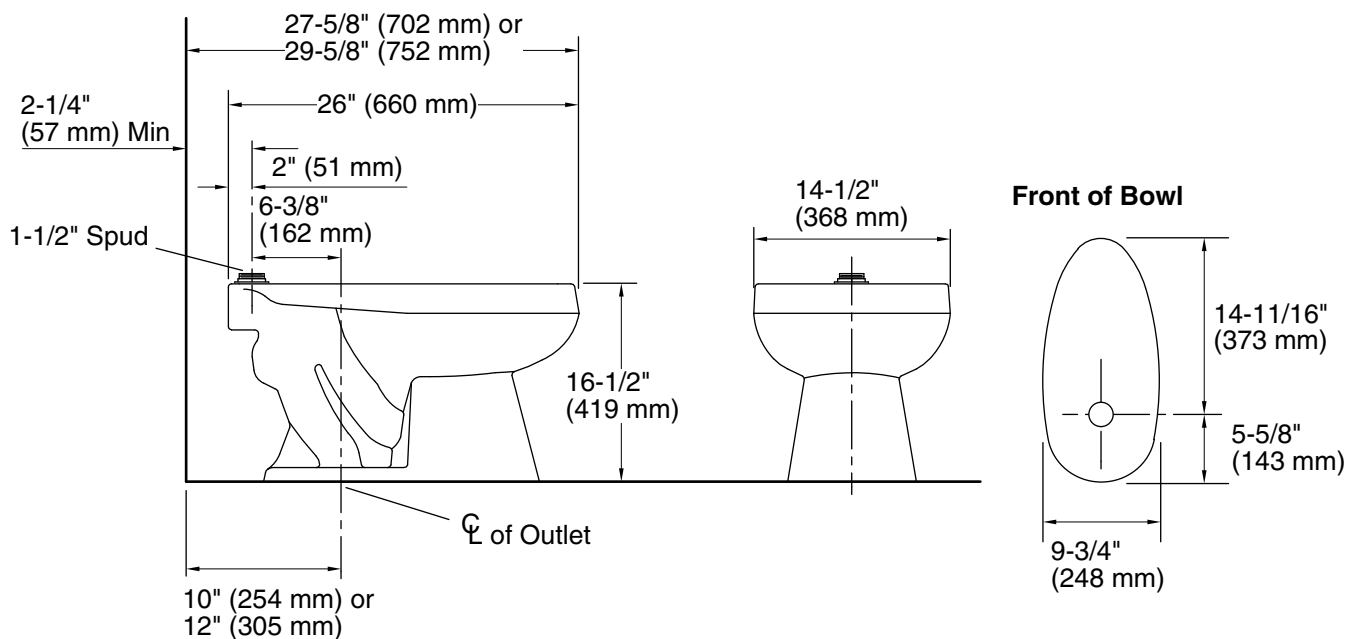

Product Diagram