

ASSEMBLY&INSTALLATION

Please read carefully and save these instructions,as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

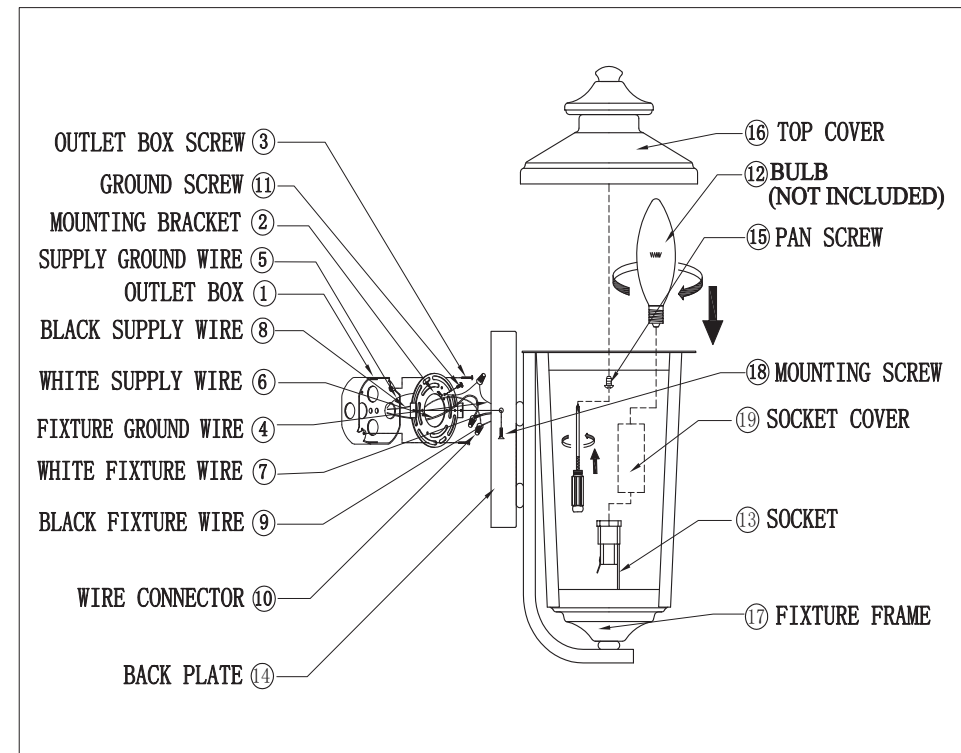
ASSEMBLY AND INSTALLATION

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Put the socket cover (19) on the socket (13). Install the bulb (12 not included) into the socket (13). Make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.
3. Align the top cover (16) onto the top of the fixture frame (17), use a Phillips screwdriver (not included) to screw the pan screws (15) through the holes on the fixture frame (17) into the threaded holes on the top cover (16).
4. Screw the mounting screws (18) into the mounting bracket (2). Mount the mounting bracket (2) to the outlet box (not included) using the outlet box screws (3). Make sure the threads of the mounting screws (18) are facing out when the mounting bracket(2) is attached to the outlet box (1).
5. Wrap the ground wire (4) from the fixture around the ground screw (11) on the mounting bracket (2). Use a wire connector (10) to connect the ground wire (4) from the fixture to the ground wire (5) from the outlet box.

ASSEMBLY AND INSTALLATION (CONT.)

Use a wire connector (10) to connect the white wire (7) from the fixture to the white wire (6 neutral wire) from the outlet box. Use a wire connector (10) to connect the black wire (9) from the fixture to the black wire (8 live wire) from the outlet box. Position the wires inside the outlet box.

6. Align the back plate to mounting bracket (2), use a Phillips screwdriver (not included) to screw the mounting screw (3) through the holes on the back plate (14).
7. To prevent moisture from entering the outlet box and the fixtures mounting plate causing a short, apply a bead of clear caulk to outline the outside of the fixtures mounting plate where it meets the wall. Leave a small space at the bottom to allow any condensation or moisture to escape.
8. Turn on the power.

INSTALLATION IS NOW COMPLETED

ITEM NO.: 4611,4641,4642