

# Kingston™

two-piece elongated 1.28 gpf toilet K-25087

#### **Features**

- Ideal for commercial installations.
- Two-piece design.
- Elongated bowl offers added room and comfort.
- 1.28 gpf (4.8 lpf).
- Durable metal left-hand Polished Chrome trip lever.
- 2-1/8" (54 mm) fully glazed trapway.
- Easy-to-service silicone seal.
- Sanitary guard where bowl and tank meet for ease of cleaning.
- Encapsulated bolts prevent rust and corrosion.
- Combination consists of the K-25086 bowl and K-25100 tank.

# **Technology**

- Single-flush gravity uses the force of gravity and a precisionengineered tank, bowl, and trapway to create a strong siphon during flushing.
- Class Five® flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.
- Class Five® canister allows water to flow out of the tank from all sides (360 degrees), increasing the power and effectiveness of the flush.
- Flush valve's 3:2 ratio harnesses the natural force of gravity and optimizes flush performance.
- Durable canister design has 90% less exposed seal material than a 3" flapper for leak-free performance.

#### Installation

- Three-bolt guick-connect installation.
- Standard 12" (305 mm) rough-in.
- Seat and supply line sold separately.

### **Recommended Products/Accessories**

K-7637 Angle Supply with Stop (single)

K-20110 Brevia<sup>™</sup> Quiet-Close<sup>™</sup> elongated toilet seat K-4650-A Lustra<sup>™</sup> Elongated toilet seat with antimicrobial

agent

K-5420 Low-Profile Bolt Caps

K-5724 Puretide® Elongated manual bidet toilet seat

# **Included Components**

Product consists of:

25100

25086

Additional Components:

Bolt cap accessory pack



## Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# **KOHLER® Toilets and Seats Limited Warranty**

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

**Color Code Description** 


0 White







# two-piece elongated 1.28 gpf toilet K-25087

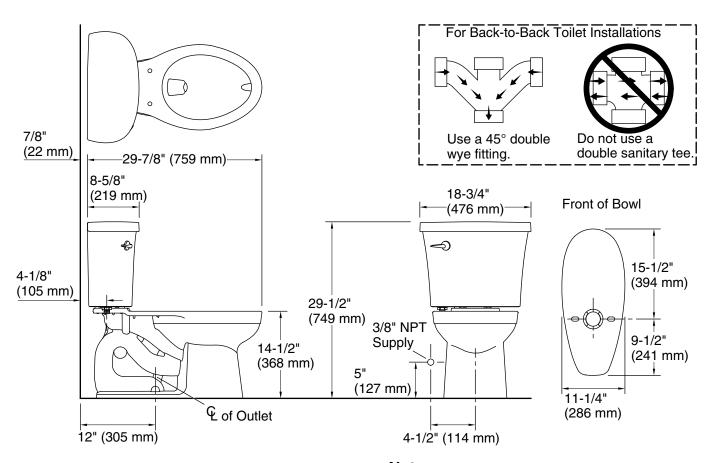

#### **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor Bowl shape: Elongated

Flush type: Gravity siphon jet Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 10-13/16" x 7-1/4" (274 mm x 183 mm) 5-5/8" (143 mm)

Rim to water

surface:

Rough-in: 12" (305 mm)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

