




**Item Number: A02251**

**WARNING** (To reduce the risk of fire, electric shock, or injury to persons):


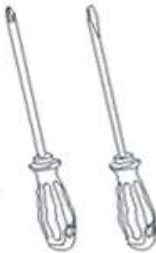



1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “**OFF**” position. B). Place the wall switch in the “**OFF**” position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

**IMAGE FOR FINISHED PRODUCT:**

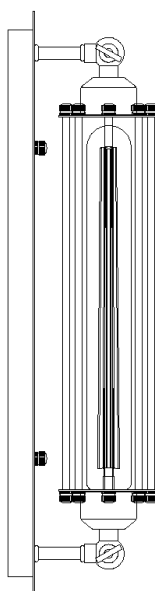

**TOOLS REQUIRED (NOT INCLUDED):**

Before doing assembly and installation please prepare the needed tools as below picture


				
Ladder	Phillips head, flat blade screwdriver	Electrical tape	Pliers	Wire cutter/Stripper

**WALL & OUTLET BOX****PARTS INCLUDING:**


- (A) Mounting plate (1)
- (C) Back plate (1)
- (D) Ball nut (2)
- (E) Joint (2)
- (F) Socket ring (2)
- (G) Green ground screw (1)
- (I) Socket cap (2)
- (J) Cage (1)

**ACCESSORIES ENCLOSED:**

- (B) Mounting screw (2)
- (H) Plastic wire connector (3)

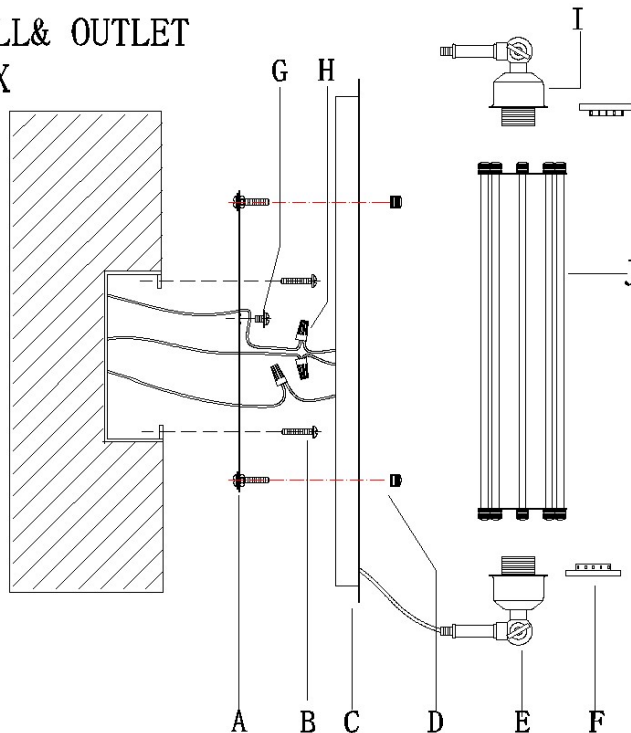**ASSEMBLY & INSTALLATION INSTRUCTIONS:**

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.
2. Make bulb installation

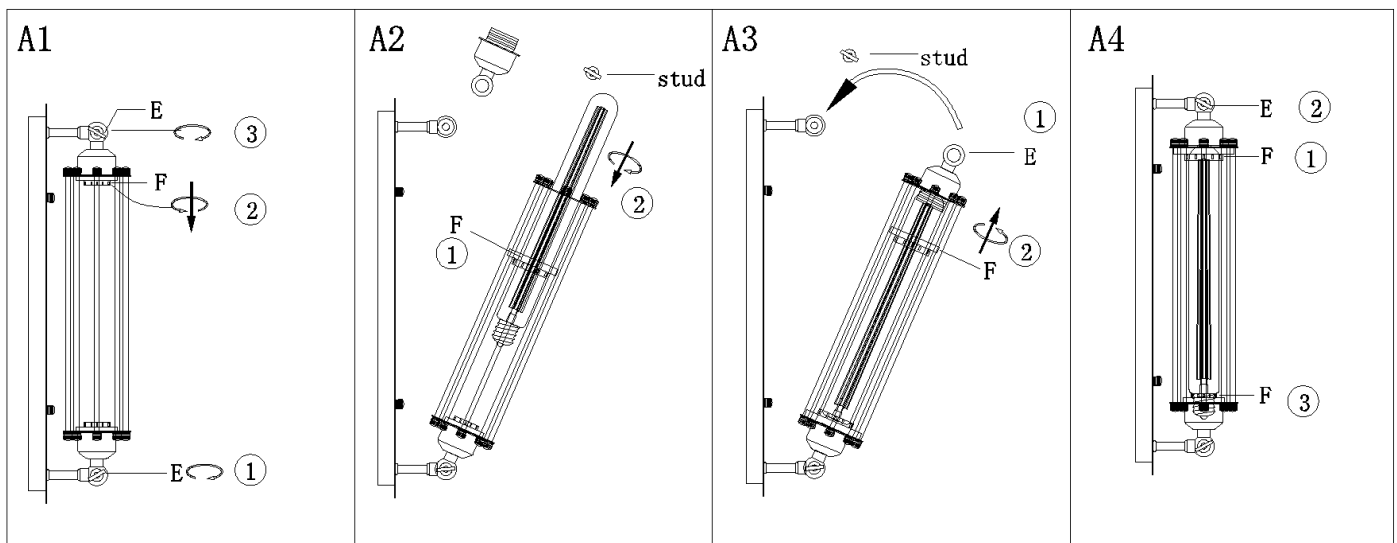

Step A1: Unscrew the lower stud to loosen the hinges making it feel like it's going to fall apart

Remove the upper ring (F) from socket, then unscrew the stud from joint (E)

Step A2: Install bulb (Not included. Please do not exceed the maximum capacity recommended on the socket.)


Carefully put socket ring (F) into cage (J). Pass bulb through socket ring (F) and then install it onto socket

Step A3: Close the upper joint (E) and secure it with stud. Thread the socket ring through bottom socket until snug

Step A4: Tighten back the lower stud and check every step is assembled properly

**2. Turn off power**

Before you start to make installation, NEVER attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position. B). Place the wall switch in the "OFF" position.

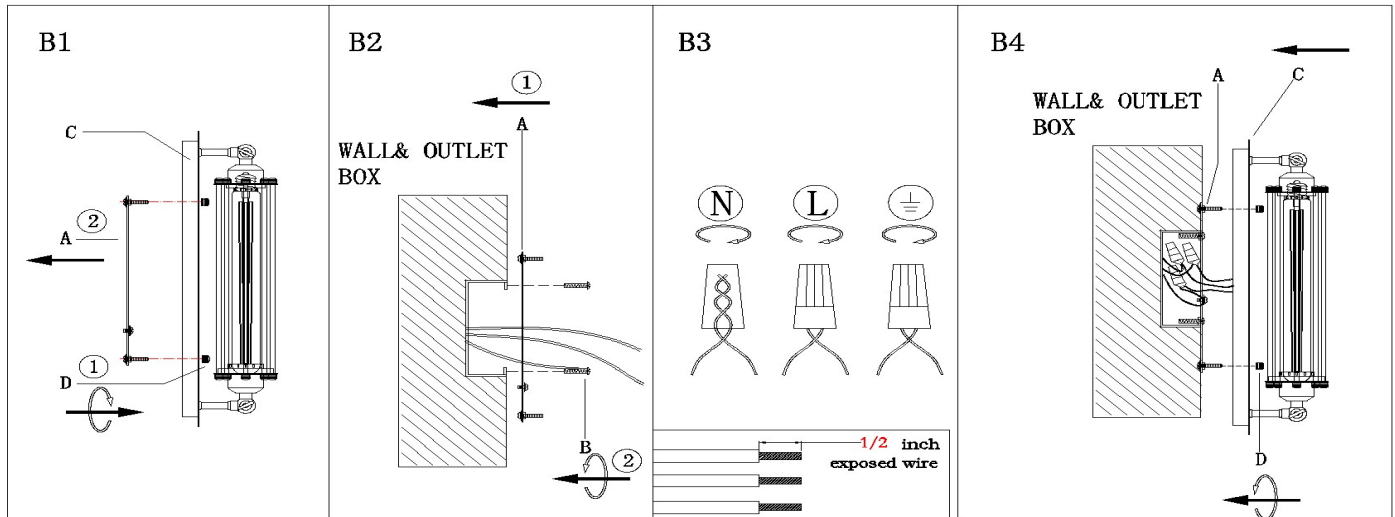**4. Make installation**


Step B1: Unscrew ball nuts (D) from the back plate (C) then remove the mounting plate (A)

Step B2: Attach the mounting plate (A) to outlet box with the mounting screws (D)

Step B3: Make wire connections

Connect wires as below wires connecting shown. **TAKE NOTE OF YOUR WIRE COLOR OF FIXTURE, NEVER CONNECT WIRE TO GROUND WIRE**


**Connect ground wire according to below chart**

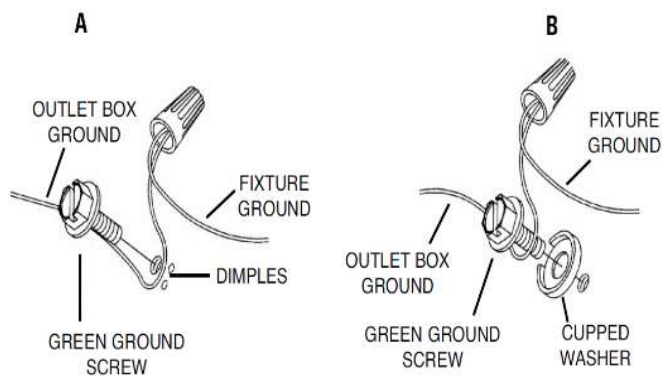

**Connect wires according to below chart**

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



Twist plastic wire connector until wires are tightly joined together, wrap each connector with approved electrical tape for more secure connection and carefully tuck all wires into the outlet box.

Step B4: Put the back plate (C) onto the screws and secure them with ball nuts (D)

**5. Check everything is installed properly, then you could turn on the light. Enjoy!**

**CLEANING**

To clean, wipe fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

**ORDERING PARTS**

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.