Thomas&Betts

Carlon® Non-Metallic Switch, Outlet and Ceiling Boxes













Carlon® PVC
Blue PVC Boxes

Carlon SUPERBLUE®
PVC Boxes

Carlon® PC
Black Polycarbonate Boxes
Vapor Barrier PC Boxes
Ceiling Boxes

Carlon® PH
Brown Phenolic Boxes

Carlon® LV
Orange Low Voltage Structured Cable Management System (SCMS)

United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289

www.tnb.com



New Work




BH353A




BH353S

Three-Gang 53 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
BH353A	53.0	Nails	Three-gang; integral clamps	5 7/8 L x 3 3/4 W x 3 1/2 D	24
BH353S	53.0	Screws	Three-gang; integral clamps	5 7/8 L x 3 3/4 W x 3 1/2 D	24



BH464A



BH464S

Four-Gang 64 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
BH464A	64.0	Nails and molded bracket	Four-gang; integral clamps	7 3/4 L x 3 7/8 W x 3 1/2 D	24
BH464S	64.0	Screws and molded bracket	Four-gang; integral clamps	7 3/4 L x 3 7/8 W x 3 1/2 D	24


Old Work



BH118R

One-Gang 18.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
BH118R	18.0	Mounting ears & swing clamps	One-gang; integral clamps	3 7/8 L x 2 3/8 W x 3 5/8 D	36




BH234R

Two-Gang 34.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
BH234R	34.0	Mounting ears & swing clamps	Two-gang; integral clamps	3 7/8 L x 2 3/8 W x 3 5/8 D	18

MADE IN U. S. A.



Carlon SuperBlue® PVC Boxes

SuperBlue™ Boxes

Ceiling Boxes

3/0-4/0 Combination 25.0 Cu.In.



BH525A-UPC



BH525P

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
• **BH525A-UPC**	25.0	Nails	Integral clamps	4 Dia. x 3.00 D	48
• **BH525P**	25.0	Nails	Integral clamps; ground lug and screw attached	4 Dia. x 3.00 D	24

• *Listed for fixture support up to 50 lbs.*

Fan Box 25.0 Cu. In.



BH525L

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
• **BH525L**	25.0	L bracket and nails	Integral clamps	4 Dia. x 3.00 D	24
• **BH525LP**	25.0	L bracket and nails	Integral clamps; ground lug and screw attached	4 Dia. x 3.00 D	24

• *Listed for fan support up to 35 lbs. and fixture support up to 50 lbs.*

Ceiling Box with Hanger Bar 25.0 Cu. In.



BH525H

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
• **BH525H**	25.0	Hanger bar 11 1/2" to 18 1/2"	Integral clamps	4 Dia. x 3.00 D	20
• **BH525HP**	25.0	Hanger bar 11 1/2" to 18 1/2"	Integral clamps; ground lug and screw attached	4 Dia. x 3.00 D	20

• *Listed for fixture support up to 50 lbs.*

3 1/2" 14.5 Cu. In.



BH614R



BH614RP

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
•† **BH614R**	14.5	Base, ears & snap-in bracket	Round old/new work box	3 1/2 Dia. x 2 3/8 D	24
•† **BH614RP**	14.5	Base, ears & snap-in bracket	Round old/new work box w/ground lug	3 1/2 Dia. x 2 3/8 D	24

• *Listed for wall fixture support up to 10 lbs.*

† *Tighten screws to to 10 in.-lbs.*

MADE IN U. S. A.

Thomas&Betts
www.tnb.com

United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289



Carlon® Black Polycarbonate Boxes

Carlon® non-metallic boxes feature a rugged polycarbonate construction to withstand extreme temperatures. The boxes will not distort or soften in heat, and they won't become brittle in the cold.

- *All Polycarbonate boxes are listed to UL514C*
- *All Polycarbonate boxes are listed for masonry walls*
- *Except as indicated, all Polycarbonate boxes are UL Classified for 2 hr. fire wall and/or fire ceiling*
- *All Polycarbonate boxes meet NEMA OS-2*
- *All Polycarbonate boxes are permissible for use with 90 degree C conductors*
- *UL File E11461 and R9140*

Grip-On GO Box® Single Gang Outlet Box

- Instead of nails or other fasteners, unique clamps are used to hold the box securely in place. Simply push onto the stud and go
- The GO Box outlet box is removable for easy repositioning
- "Fast-Set" mounting holes enable quick installation of devices
- Perfectly aligned every time
- Perfect for drywall depth
- A locator hole in the mounting bracket helps position the box on marked studs for accurate installation
- The GO Box design is UL Listed
- 23.0 cu. in. capacity accommodates large devices and offers easy installation of wiring

It's a whole new ball game for high-volume residential products. That's because the Carlon® GO Box® product line is one of the most revolutionary labor-saving products ever designed. The GO stands for "Grip-On," and that's exactly how it works. Just push the box onto a stud and the specially designed clamps hold it in place. No tools or fasteners are required, reducing installation time, which means you can move on to the next job. When it comes to lower installed costs, this changes everything!



One-Gang 23.0 Cu.In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
GO-23	23.0	Grip-On bracket	—	3¾ L x 2⅜ W x 2½ D	30
GO-23-FS	23.0	Grip-On bracket	Fast-Set	3¾ L x 2¼ W x 2 11/16 D	30



118-N *120-N* *120-N-FS* *122-N* *122-N-FS*

One-Gang Nail-On 18.0 - 22.5 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
118-N	18.0	Angled side nails	—	3¾ L x 2¼ W x 2⅞ D	100
120-N	20.3	Angled side nails	—	3¾ L x 2¼ W x 3 3/16 D	100
120-N-FS	20.3	Angled side nails	Fast Set	3¾ L x 2¼ W x 3 3/16 D	100
122-N	22.5	Angled side nails	—	3¾ L x 2¼ W x 3 3/16 D	100
122-N-FS	22.5	Angled side nails	Fast Set	3¾ L x 2¼ W x 3 3/16 D	100

MADE IN U. S. A.

United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289



Carlon® PC New Work Boxes

New Work Boxes



118-LB


118-LBP


120-LB


120-LBP


122-LB


122-LBP

One-Gang Brackets 18.0 - 22.5 Cu. In.


CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
118-LB	18.0	Molded side bracket for wood/steel studs	—	3 3/4 L x 2 1/4 W x 2 7/8 D	100
118-LBP	18.0	Molded side bracket for wood/steel studs	POSI-SET® Fast Set	3 3/4 L x 2 1/4 W x 2 7/8 D	100
120-LB	20.3	Molded side bracket for wood/steel studs	—	3 3/4 L x 2 1/4 W x 3 3/16 D	100
120-LBP	20.3	Molded side bracket for wood/steel studs	POSI-SET® Fast Set	3 3/4 L x 2 1/4 W x 3 3/16 D	100
122-LB	22.5	Molded side bracket for wood/steel studs	—	3 3/4 L x 2 1/4 W x 3 5/8 D	100
122-LBP	22.5	Molded side bracket for wood/steel studs	POSI-SET® Fast Set	3 3/4 L x 2 1/4 W x 3 5/8 D	100


234-N


234-NP

Two Gang Nail-On 34.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
234-N	34.0	Angled side nails	POSI-WEDGE® cable clamps	3 3/4 L x 4 W x 3 3/32 D	50
234-NP	34.0	Angled side nails	POSI-WEDGE® POSI-SET®	3 3/4 L x 4 W x 3 3/32 D	50


234-LB

Two Gang Bracket 34.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
234-LB	34.0	Steel side bracket for wood/steel studs	POSI-WEDGE® cable clamps	3 3/4 L x 4 W x 3 3/32 D	50

MADE IN U. S. A.


Thomas&Betts
www.tnb.com

United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289




New Work Boxes



345-N

Three-Gang Nail-On 45.0 Cu.In


CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
345-N	45.0	Angled side nails	POSI-WEDGE® cable clamps	3¾ L x 5 13/16 W x 2¾ D	20



345-LB

Three Gang Bracket 45 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
345-LB	45.0	Steel side bracket for wood/steel studs	POSI-WEDGE® cable clamps	3¾ L x 5 13/16 W x 2¾ D	25

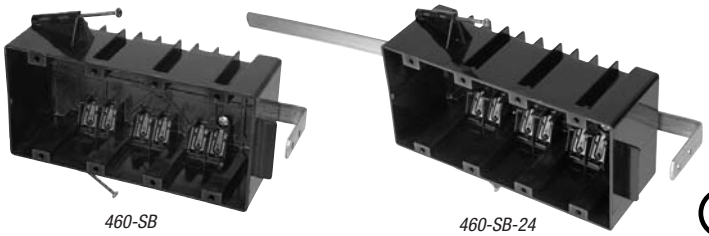


460-SB 460-SB-24

Four Gang Nail-On 60 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
* **460-SB**	60.0	Angled side nails & back bracket	POSI-WEDGE® cable clamps	3¾ L x 7 9/16 W x 2¾ D	10
* • **460-SB-24**	60.0	Angled side nails & back bracket	POSI-WEDGE® cable clamps	3¾ L x 7 9/16 W x 2¾ D	10

• *24" adjustable bracket*

* *Not UL Classified for fire wall and/or fire ceiling.*

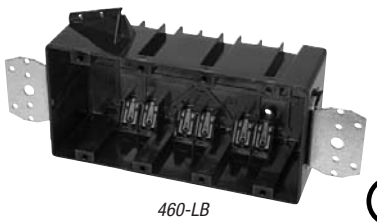

460-LB

Four Gang Bracket 60 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
* **460-LB**	60.0	Steel side brackets for wood/steel studs	POSI-WEDGE® cable clamps	3¾ L x 7 9/16 W x 2¾ D	8

** Not UL Classified for fire wall and/or fire ceiling.*

MADE IN U. S. A.

United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289



Carlon® PC
New Work Boxes

New Work Box


4S-32-N

4" Square Boxes 32.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
4S-32-N	32.0	Angled side nails	POSI-WEDGE® cable clamps	4 L x 4 W x 2 9/16 D	50


Old Work Boxes


114-0W


118-0W

One-Gang 14.0 – 18.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
114-0W	14.0	Swing-ear brackets	—	3 1/2 L x 2 9/32 W x 2 7/8 D	50
118-0W	18.0	Swing-ear brackets	—	3 13/16 L x 2 1/4 W x 3 1/32 D	100


232-0W

Two-Gang 32.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
232-0W	32.0	Swing-ear brackets	POSI-WEDGE® cable clamps	3 5/8 L x 4 1/16 W x 3 3/16 D	50

MADE IN U. S. A.

Thomas&Betts
www.tnb.com

United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289



Energy-Efficient Vapor Barrier Boxes

Vapor-barrier boxes are designed to meet the energy-efficiency requirements of modern homes. They feature a drywall flange covered with a foam gasket and additional gaskets over the cable entry points. These gaskets provide a vapor-tight seal, preventing the free flow of air through the box. This helps control heating costs in the winter and cooling costs in the summer.

- High strength polycarbonate construction — will not shatter when cold or distort in heat
- V-clamps provide self-clamping cable entry (multi-gang and fan/fixture box)
- 1/2" offset flange to ensure a flush fit in 1/2" drywall
- Angled side nails for rapid installation
- Pre-drilled flanges for additional mounting options




FN-23



FN-236-V



FN-354-V



FN-460-V

One-, Two-, Three- and Four-Gang

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
FN-23	22.5	Angled side nails	Vapor barrier	3⅝ L x 2¼ W x 3⅝ D	50
FN-236-V	36.0	Angled side nails	Vapor barrier	3½ x 4 x 3¼ D	50
FN-354-V	54.0	Angled side nails	Vapor barrier	3½ x 5¾ x 3¼ D	20
* **FN-460-V**	60.0	Angled side nails	Vapor barrier	3½ x 7½ x 2¾ D	10

* *Not UL Classified for fire wall and/or fire ceiling.*



FN-426-C-V

Ceiling Fixture Box 26.0 Cu.In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
FN-426-C-V	26.0	Angled side nails	Vapor barrier	4 L x 4 W x 2¾ D	50



FN-CFB

Ceiling Fan/Fixture 26.0 Cu.In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
FN-CFB	26.0	Angled side nails and #3 bracket	Vapor barrier	4 L x 4 W x 2¾ D	50



FNP

Voltage Partition

CAT. NO.	DESCRIPTION	STD. CTN. QTY.
FNP	Voltage partition for NG & FN series multi-gang boxes	50

MADE IN U. S. A.



Carlon® PC New Work Boxes

Energy-Efficient Vapor Barrier Box



CFB-16-F


Saddle Type Fan/Fixture 16.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
CFB-16-F	16.0	Supplied lag screws	Ceiling fan/fixture	4 L x 4 W x 3 5/16 D	50


Universal Flanged Nail-On Boxes




NG-CFB



NG-236-V



NG-354-V

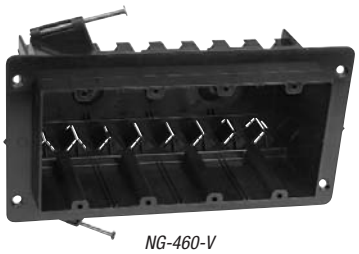

NG-460-V

Two-, Three- and Four-Gang

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
• **NG-CFB**	26.0	Angle nails and #3 bracket	Ceiling fan/fixture	4 Dia x 2 3/4 D	50
• **NG-236-V**	36.0	Angled side nails	2-gang wall	3 1/2 L x 4 W x 3 1/4 D	50
• **NG-354-V**	54.0	Angled side nails	3-gang wall	3 1/2 L x 5 3/4 W x 3 1/4 D	20
* • **NG-460-V**	60.0	Angled side nails	4-gang wall	3 1/2 L x 7 1/2 W x 2 3/4 D	10

• *NG Boxes have 1/2" offset wallboard flange and V-type cable entry.*

* *Not UL Classified for fire wall and/or fire ceiling.*



FNP

Voltage Partition

CAT. NO.	DESCRIPTION	STD. CTN. QTY.
FNP	Voltage partition for NG & FN series multi-gang boxes	50

MADE IN U. S. A.

Thomas&Betts
www.tnb.com

United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289



Ceiling Boxes

All ceiling boxes are produced from a high heat-resistant material developed specifically for fixture support applications.

- Meets NEMA OS-2
- UL Listed to UL 514C



3R-16-N



3R-16-NGP



N-321-C




N-321-GC

3 1/2" Nail-On 16.0 - 20.5 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
• **3R-16-N**	16.0	Angled nails	POSI-WEDGE® cable clamps ground strap installed	3 1/2 Dia. x 2 1/4 D	50
• **3R-16-NGP**	16.0	Angled nails	POSI-WEDGE® cable clamps	3 1/2 Dia. x 2 1/4 D	50
• **N-321-C**	20.5	Angled side nails	Molded fast clamps	3 1/2 Dia. x 3 1/8 D	50
• **N-321-GC**	20.5	Angled side nails	Molded fast clamps ground strap installed	3 1/2 Dia. x 3 1/8 D	50

• *Listed for fixture support up to 50 lbs.*

NEW!



3R-16-N-RED

3 1/2" Fire Alarm Nail-On 16.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
• **3R-16-N-RED**	16.0	Angled nails	POSI-WEDGE® cable clamps	3 1/2 Dia. x 2 1/4 D	50

• *Red ceiling box for fire alarm applications.*



N-423-C-V



N-423-GC-V

4" 22.5 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
• **N-423-C-V**	22.5	Angled side nails	Molded V-clamps ground strap installed	4 Dia. x 2 1/2 D	50
• **N-423-GC-V**	22.5	Angled side nails	Molded fast clamps	4 Dia. x 2 1/2 D	50

• *Listed for fixture support up to 50 lbs.*

MADE IN U. S. A.



Carlon® PC

Ceiling Boxes – New Work

Ceiling Boxes with Bar Hanger

- Meets NEMA OS-2



3R-16-BH


3R-16-BHGP


N-321-C-94


N-321-GC-94


N-321-C-95



N-321-GC-95

31/2" 20.5 Cu.In

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
• **3R-16-BH**	16.0	Combo Bar 14 5/16" min - 25" max	POSI-WEDGE® cable clamps	3 1/2 Dia. x 2 1/4 D	25
• **3R-16-BHGP**	16.0	Combo Bar 14 5/16" min - 25" max	POSI-WEDGE® cable clamps ground strap installed	3 1/2 Dia. x 2 1/4 D	25
• **N-321-C-94**	20.5	16" bar hanger 12 1/4" min.–19" max.	Molded fast clamps	3 1/2 Dia. x 3 1/8 D	50
• **N-321-GC-94**	20.5	16" bar hanger 12 1/4" min.–19" max.	Molded fast clamps ground strap installed	3 1/2 Dia. x 3 1/8 D	50
• **N-321-C-95**	20.5	Combo Bar 14 5/16" min - 25" max	Molded fast clamps	3 1/2 Dia. x 3 1/8 D	50
• **N-321-GC-95**	20.5	Combo Bar 14 5/16" min - 25" max	Molded fast clamps ground strap installed	3 1/2 Dia. x 3 1/8 D	50

• *Listed for fixture support up to 50 lbs.*


N-423-C-94-V


N-423-GC-94-V


N-423-C-95-V


N-423-GC-95-V

4" 22.5 Cu.In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
• **N-423-C-94-V**	22.5	16" bar hanger 12 1/4" min.–19" max.	Molded fast clamps	4 Dia. x 2 1/2 D	50
• **N-423-GC-94-V**	22.5	16" bar hanger 12 1/4" min.–19" max.	Molded fast clamps ground strap installed	4 Dia. x 2 1/2 D	50
• **N-423-C-95-V**	22.5	Combo Bar 14 5/16" min - 25" max	Molded fast clamps	4 Dia. x 2 1/2 D	50
• **N-423-GC-95-V**	22.5	Combo Bar 14 5/16" min - 25" max	Molded fast clamps ground strap installed	4 Dia. x 2 1/2 D	50

• *Listed for fixture support up to 50 lbs.*

MADE IN U. S. A.

Thomas&Betts
www.tnb.com

United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289



Saddle Type Ceiling Fan/Fixture Boxes



CFB-12




CFB-16

Saddle Type Fan/Fixture 12.0 – 16.0 Cu.In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DEPTH	STD. CTN. QTY.
• **CFB-12**	12.0	Lag screws (supplied)	Non-metallic saddle type ceiling fan/fixture box with v-clamps for non-metallic sheathed cable.	2 3/8	50
• **CFB-16**	16.0	Lag screws (supplied)	Non-metallic saddle type ceiling fan/fixture box with v-clamps for non-metallic sheathed cable and two ½" KOs.	3 5/16	50

• *Listed for fan and fixture support up to 70 lbs.*



Easy press-fit onto the joist. Integrally molded ribs grip the joist and stop the box from falling.



Just one hand is required to mount the box using the pre-located mounting screw.



Integrally molded cable V-clamps provide easy and secure clamping for non-metallic cables.



CFB-16 features 1⁄2" KOs in addition to V-clamps.

Pan Boxes



CFB-612



CFBSO-612



CFB-858



CFBSO-858

6.0 - 8.0 Cu.In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
CFB-612	6.0	Lag screws (supplied)	Shallow ceiling fan box with V clamp, round 7/8" dia KO	4 Dia. x ½ D	50
CFBSO-612	6.0	Lag screws (supplied)	Shallow ceiling fan box with V clamp, round 7/8" dia KO, and snap on feature	4 Dia. x 5/8 D	50
CFB-858	8.0	Lag screws (supplied)	Shallow ceiling fan box with V clamp, round 7/8" dia KO	4 Dia. x ½ D	50
CFBSO-858	8.0	Lag screws (supplied)	Shallow ceiling fan box with V clamp, round 7/8" dia KO, and snap on feature	4 Dia. x 5/8 D	50

MADE IN U. S. A.




Carlon® PH
New Work Boxes


Carlon® Brown Phenolic Boxes

New Fire Rating! Carlon® phenolic boxes can be installed in the same stud cavity of a shared two-hour wall. They may also face opposite directions with only a 3" horizontal separation — ideal for multi-family construction!

- *All Phenolic boxes are listed to UL514C*
- *All Phenolic boxes are listed for masonry walls*
- *All Phenolic boxes are UL Classified for 2 hr. fire wall and/or fire ceiling*
- *All Phenolic boxes meet NEMA OS-2*
- *All Phenolic boxes are permissible for use with 90 degree C conductors*
- *UL File E11461 and R9140*

One-Gang Nail On


2050-UB


2070


2030


1040


1240


2000

One-Gang Nail On 9.0 – 18.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
2050-UB	9.0	Bottom nails	—	3 9/16 L x 2 1/4 W x 1 13/16 D	100
2070	14.0	Bottom nails	—	3 9/16 L x 2 1/4 W x 2 5/8 D	100
2030	16.0	Bottom nails	—	3 9/16 L x 2 15/32 W x 2 13/16 D	100
1040	18.0	Compound angled nails	—	3 9/16 L x 2 1/8 W x 3 1/8 D	100
1240	18.0	Recessed angled nails	—	3 11/16 L x 2 1/4 W x 3 5/16 D	100
2000	18.0	Bottom nails	"Classic"	3 11/16 L x 2 1/4 W x 3 1/8 D	100


1250-UB


1260


1250-UB-S


1050-UB


1260-S

One-Gang Nail On 20.3 – 22.5 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
1250-UB	20.3	Recessed angled nails	—	3 7/8 L x 2 3/8 W x 3 3/8 D	100
1250-UB-S	20.3	Recessed angled tech screws for wood or steel studs	—	3 7/8 L x 2 3/8 W x 3 3/8 D	100
1050-UB	21.0	Compound angled nails	—	3 5/8 L x 2 5/16 W x 3 1/2 D	50
1260	22.5	Recessed angled nails	—	3 7/8 L x 2 3/8 W x 3 21/32 D	50
1260-S	22.5	Recessed angled tech screws for wood or steel studs	—	3 7/8 L x 2 3/8 W x 3 21/32 D	50

MADE IN U. S. A.


Thomas&Betts
www.tnb.com


United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289




One-Gang Brackets


9050-702


2030-502


2030-702


2000-738


1250-112

One-Gang Brackets 5.0 – 20.3 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
9050-702	5.0	¼" offset bracket for wood/steel studs	—	3 9/16 L x 2 1/8 W x 1 D	100
2030-502	16.0	½" offset bracket for wood/steel studs	—	3 5/8 L x 2 1/4 W x 2 3/4 D	100
2030-702	16.0	¼" offset bracket for wood/steel studs	—	3 5/8 L x 2 1/4 W x 2 3/4 D	100
2000-738	18.0	⅜" offset bracket for wood/steel studs	—	3 5/8 L x 2 5/16 W x 3 1/8 D	100
1250-112	20.3	½" offset bracket for wood/steel studs	—	3 7/8 L x 2 3/8 W x 3 3/8 D	50

Two-Gang Nail On



1032-C



1032-UB


1052-C


1052-C-SQ


1052-PC


1052-UB


1072


1072-C


1072-C-SQ


1072-PC

Two-Gang Nail On 27.5 – 40.5 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
1032-C	27.5	Compound angled nails	High clamps	3 5/8 L x 4 1/16 W x 2 11/16 D	50
1032-UB	27.5	Compound angled nails	#36 clamps bulk packed	3 5/8 L x 4 1/16 W x 2 11/16 D	50
1052-C	32.5	Compound angled nails	High clamps	3 5/8 L x 4 1/16 W x 3 1/8 D	50
1052-C-SQ	32.5	Compound angled nails	High clamps with #2 Sq+Ph combo head screw	3 5/8 L x 4 1/16 W x 3 1/8 D	50
1052-PC	32.5	Compound angled nails	Non-metallic clamps	3 5/8 L x 4 1/16 W x 3 1/8 D	50
1052-UB	32.5	Compound angled nails	#36 clamps bulk packed	3 5/8 L x 4 1/16 W x 3 1/8 D	50
1072	40.5	Compound angled nails	#36 clamps bulk packed	3 5/8 L x 4 3/32 W x 3 7/8 D	50
1072-C	40.5	Compound angled nails	High clamps	3 5/8 L x 4 3/32 W x 3 7/8 D	50
1072-C-SQ	40.5	Compound angled nails	High clamps with #2 Sq+Ph combo head screw	3 5/8 L x 4 3/32 W x 3 7/8 D	50
1072-PC	40.5	Compound angled nails	Non-metallic clamps	3 5/8 L x 4 3/32 W x 3 7/8 D	50

MADE IN U. S. A.



Carlon® PH
New Work Boxes

Two-Gang Brackets


7072-2


7072-202


7072-N02


6062-402


6062-4-UB


7002-2


7002-202


2002-738


2002-738-C


2002-R-C

Two-Gang Brackets 24.0 – 34.0 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
7072-2	24.0	#2 bottom bracket and wire support	High clamps	3 5/16 L x 4 W x 2 3/4 D	50
7072-202	24.0	#2 bottom bracket and wire support	#36 clamps bulk packed	3 5/16 L x 4 W x 2 3/4 D	50
7072-N02	24.0	"N" bracket	#36 clamps bulk packed	3 5/16 L x 4 W x 2 3/4 D	50
6062-402	25.0	Ears, #4 swing bracket	#36 clamps bulk packed	3 3/8 L x 4 3/16 W x 2 1/2 D	50
6062-4-UB	25.0	Ears, #4 swing bracket	High clamps	3 3/8 L x 4 3/16 W x 2 1/2 D	50
6062-4-UB-SQ	25.0	Ears, #4 swing bracket	High clamps with #2 Sq+Ph combo head screw	3 3/8 L x 4 3/16 W x 2 1/2 D	50
7002-2	32.5	#2 bottom bracket and wire support	High clamps	3 1/4 L x 4 W x 3 5/8 D	50
7002-202	32.5	#2 bottom bracket and wire support	#36 clamps bulk packed	3 1/4 L x 4 W x 3 5/8 D	50
2002-738	34.0	3/8" offset brackets for wood/steel studs	3/8" Offset wallboard tabs & #36 clamps bulk packet	3 11/16 L x 4 3/16 W x 3 1/4 D	50
2002-738-C	34.0	3/8" offset brackets for wood/steel studs	3/8" Offset wallboard tabs & high clamps	3 11/16 L x 4 3/16 W x 3 1/4 D	50
2002-R-C	34.0	"R" bracket	High clamps	3 11/16 L x 4 3/32 W x 3 1/4 D	50

MADE IN U. S. A.

Thomas&Betts
www.tnb.com

United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289