# MOEN®

# Specifications

### DESCRIPTION

- Reflex<sup>™</sup> pulldown system offers smoother operation, easy movement and secure docking
- PowerBoost<sup>™</sup> technology provides boosted water performance with the push of a button
- Metal Wand
- Duralock<sup>™</sup> quick connect installation
- Metal construction with various finishes identified by suffix
- Pulldown spray with 68" braided hose
- High arc spout provides height and reach to fill or clean large pots while pullout wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Flexible supply lines with 3/8" compression fittings

#### **OPERATION**

- Lever or wheel style handle
- Four function spray wand
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Temperature controlled by 100° arc of handle travel

### FLOW


- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi
- CARTRIDGE
- 1255<sup>™</sup> Duralast<sup>™</sup> cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

### **STANDARDS**

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
  ADA for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

#### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



# Paterson™ Single-Handle High Arc Pulldown Kitchen Faucet

### Models: S72003 series

## **NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

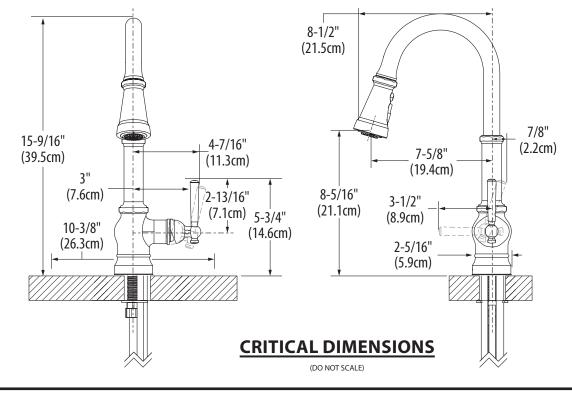

# MOEN®

# Specifications

### DESCRIPTION

- Reflex<sup>™</sup> pulldown system offers smoother operation, easy movement and secure docking
- PowerBoost™ technology provides boosted water performance with the push of a button
- Metal Wand
- Duralock<sup>™</sup> quick connect installation
- · Metal construction with various finishes identified by suffix
- Pulldown spray with 68" braided hose
- High arc spout provides height and reach to fill or clean large pots while pullout wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Flexible supply lines with 3/8" compression fittings

### **OPERATION**

- Lever or wheel style handle
- Four function spray wand
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Temperature controlled by 100° arc of handle travel

### FLOW


- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi
- CARTRIDGE
- 1255<sup>™</sup> Duralast<sup>™</sup> cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

### **STANDARDS**

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
  ADA for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



# Paterson™ Single-Handle High Arc Pulldown Kitchen Faucet

### Models: S72003 series

## **NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

