Tresham®



The Complete Solution[®] two-piece elongated toilet, 1.28 gpf **K-23270**

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height[®] feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- Left-hand Polished Chrome trip lever
- The Complete Solution toilets provide everything you need, including bowl, tank, seat, wax ring, and hardware
- Coordinates with other products in the Tresham collection

Technology

- AquaPiston[®] canister allows water to flow into the bowl from all sides (360°), increasing the power and effectiveness of the flush
- Flush valve's 3:2 ratio harnesses the natural force of gravity and optimizes flush performance
- Durable canister design has 90% less exposed seal material than a 3" flapper for leak-free performance
- Light-touch canister flush requires a lower actuation force than a flapper
- AquaPiston[®] canister flush valve optimizes flush performance and resists warping and deterioration

Installation


- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Supply line sold separately

Recommended Products/Accessories

K-26132-CSP C³®-420 Elongated bidet toilet seat K-5588 Purefresh® Elongated toilet seat K-5420 Low-Profile Bolt Caps K-23726 Drain treatment

Included Components

Additional Components: Bolt cap accessory pack Tank accessory pack Tank cover Trip lever





Catific by IPMO RAT

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC


KOHLER[®] Toilets and Seats Limited Warranty

See website for detailed warranty information.





Tresham® The Complete Solution® two-piece elongated toilet, 1.28 gpf K-23270

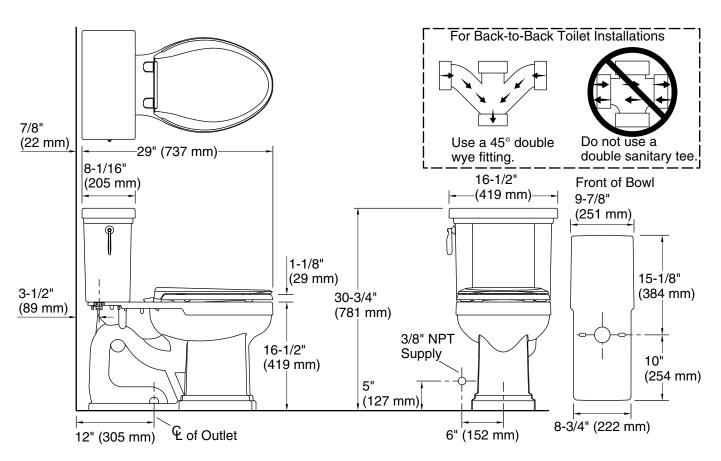

Technical Information

All product dimensions are nominal.

| Toilet type: | Floor-mount |
|-----------------------|--------------------------------|
| Bowl shape: | Elongated |
| Flush type: | AquaPiston |
| Trap passageway: | 2-1/8" (54 mm) |
| Water surface size: | 11-1/2" x 9" (292 mm x 229 mm) |
| Rim to water surface: | 5-3/8" (137 mm) |
| Rough-in: | 12" (305 mm) |
| Seat-mounting holes: | 5-1/2" (140 mm) |

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

