
Instruction Manual of Towel Warmers A203


Thanks for choosing Vjass Towel Warmer, please read this instruction manual carefully before installation, ensure the exact installation and maintenance of the products.

A, Specification

Model No.	A203
Frequency	50 ~ 60Hz
Rated Power	70W
Voltage	220 ~ 240V
Warm Up Time	5 ~ 10 mins
Max Temperature	45 ~ 60 °C
IP Grade	IP X4
Wire Connect Way	Plug in

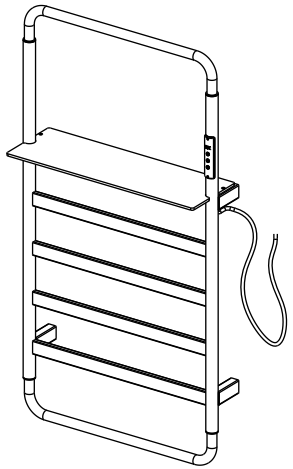

B, Dimension:
(unit: mm)

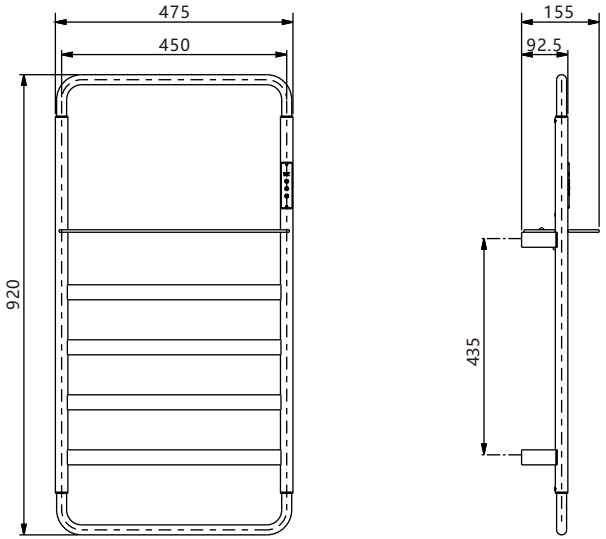

C, Safety Information



Warning:

1, Read the instruction manual carefully before installation, to avoid the hurting of the person and / or products.

2, All wiring must be in accordance with the IEC Standard and should be performed by a licensed professional who is certified to do electrical wiring.

3, Make sure that the electrical circuit breaker is shut off at the main panel before wiring or servicing your towel warmer

4, Yellow/Green Wire is the Earth Cable(PE), the other 2 wires will be connected to the power line(N) and fire wire(L)

5, To ensure the safety operating, the products can be only connected to the electric circuit with leakage circuit breaker

6, The products are designed to be installed and operted indoor

7, The Children, Elderly & Disable People should used the products with the guardian accompanying

8, To avoid the hurt of the children, the products must be installed at least 600mm away from the ground to the lowest point of the products

Maintenance:

1, Please clean the products with the warm water & soft towel


2, Abrasive Powder, detergent, Oil Cleaner, Alkali cleaner MUST NOT be applied

3, Don't hit the surface of the products


4, Disconnect the products when it is not using

5, The products are designed for cleaning fabric which washed in water only. Apply the products for the fabric which washed by liquid or carry with residual liquid other than water may cause the colour fading and scorching, operating the products exactly as the instruction maual, the colour fading the scorching will never be happened.

D, Installation

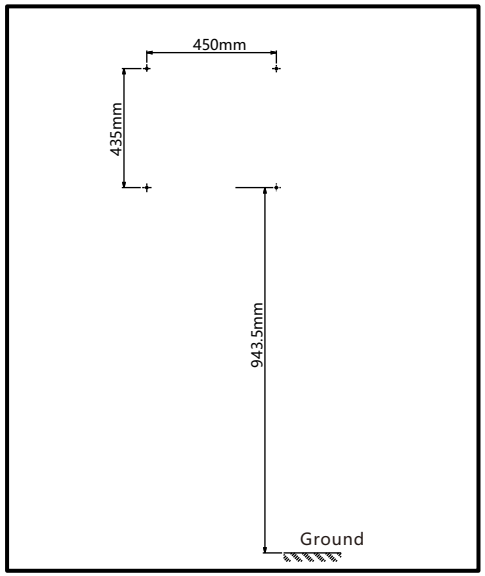



② Drill 6 X8mm holes on the fixed installing



① Find out and mark 6 installing point on the wall with the center of the lower installing point 1322mm above the ground. Then make sure the level of the 4 installing point


② Drill 6 X8mm holes on the fixed installing point on the wall.

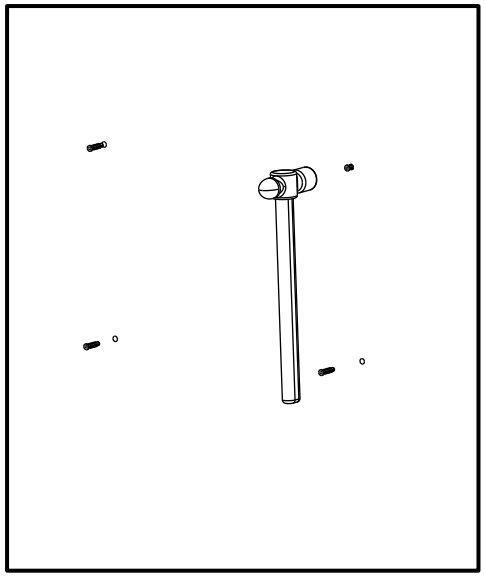


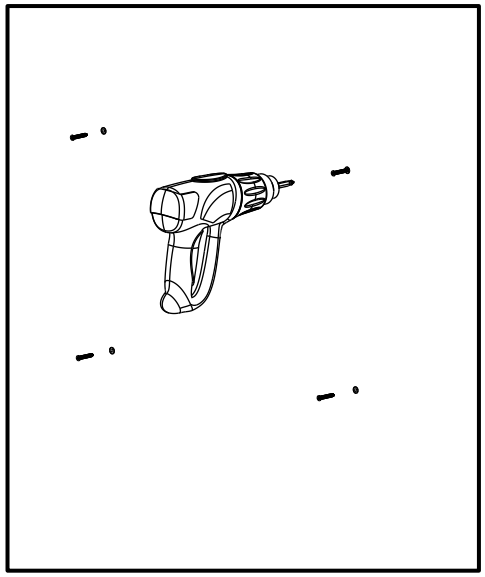

③ Insert the expansion rod into the drilled installing holes (4X8mm)

④ Fixing the tapping screw into the expansion rod, ensure the distance approximate 3mm between the screw head and the wall

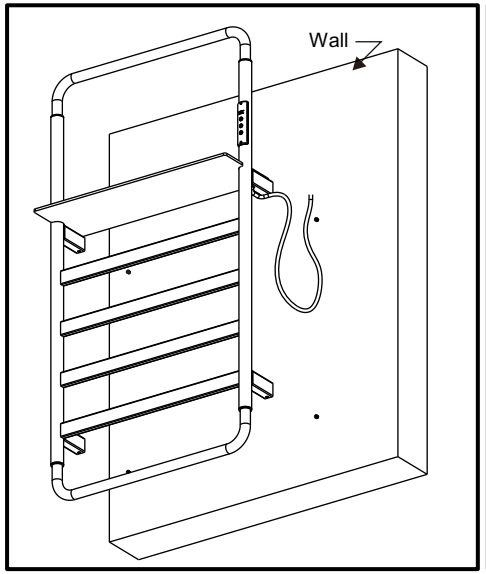

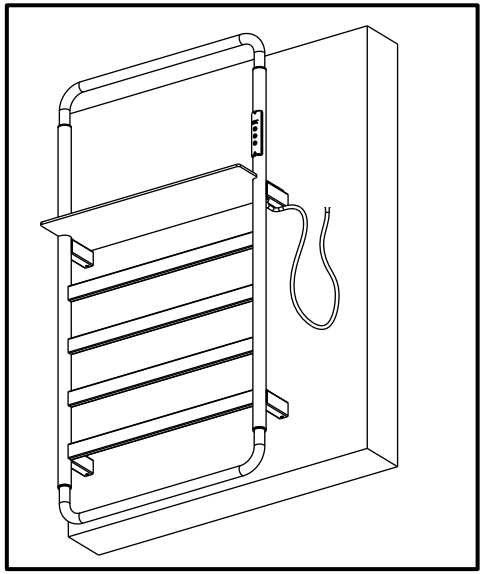

⑤ Hanging up the products onto the wall with the 4 holes on the backside aim at the fixed 4 screws, push the products till the wall, pull down and lock the products

⑥ Installation completed

E, Power-on Test

1, Check and confirm the installation completed exactly as D

2, Plug in, switch on for 15 ~ 30 mins

3, Touch and feel the towel bar, the bar should be warm up

4, Keep the products in this state for 30 ~ 40mins further, touch the towel bar again, the bar should be warm and the temperature remained as 45 ~ 60 °C, make sure no more increasing.

5, Power-on Test finished, disconnect the products. Your product is ready.