




# FPD6236B\*\* 72" Ceiling Fan

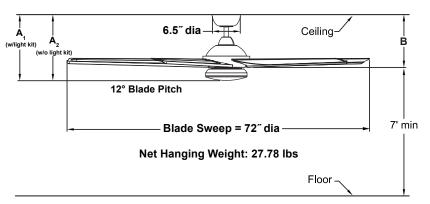

	A <sub>1</sub>	A <sub>2</sub>	В
Fan w/4.5"downrod	14.63″	14.63″	11.90″
Fan w/12" downrod	22.13″	22.13"	19.40″
Fan w/18" downrod	28.13"	28.13"	25.40″
Fan w/24" downrod	34.13″	34.13″	31.40″
Fan w/36" downrod	46.13″	46.13"	43.40″
Fan w/48" downrod	58.13"	58.13"	55.40″
Fan w/60" downrod	70.13″	70.13″	67.40″
Fan w/72" downrod	82.13"	82.13"	79.40″

## **INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

# **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### **MOTOR SPECS:**

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

#### **BLADES:**

A set of five 33" blades in plastic with aluminum trim materials.

# **CONTROL OPTIONS:**

A WiFi receiver and TR205D hand-held remote control are included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW206D wall control is available — sold separately. Instructions are provide with each control.

## **LIGHTING OPTIONS:**

One 18-watt dimmable LED.

## **DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a

Available Finishes			
BN	Brushed Nickel with Bourbon Blade and Opal Frosted Glass / Steel Cap		
DZ	Dark Bronze with Bourbon Blade and Opal Frosted Glass / Steel Cap		
GR	Matte Greige with Weathered Wood Blade and Opal Frosted Glass / Steel Cap		

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	94	5090	140	0.56	36
Med (9 <sup>th</sup> )	64	3297	332	0.16	10
Low (1 <sup>th</sup> )	29	941	399	0.05	2

Energy Guide FTC					
Power (Wave) Total Air Delivery (CFMave)		Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)		
23	3361	6	148		

Light Bulb Information (120V)					
Bulb Type	Watts	tts   QTY   Lumens Amount   Color Ter		Color Temp	CRI
LED	18	1	1500	3000	90%

downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

#### **LOCATION USE:**

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.