

Prismatic Glass LED

Ceiling Stem Hung with Swivel Mounted • Dry Location Listed **PROGRESS LED**

Description:

Prismatic Glass LED Collection One-Light Brushed Nickel Prismatic Glass Coastal Pendant Light

Specifications:

- Prismatic Super White Glass Shade
- Etched Glass Diffuser
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 5.5 in W., 1.375 in ht., 5.5 in depth
- Mounting strap for outlet box included
- 120 in of wire supplied

Performance:


Number of Modules	1
Input Power	9 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	623/69.2 (LM-82)
Lumens/LPW (Delivered)	448/58.9 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Max. Operating Temp	30 °C
Warranty	5-year Limited Warranty
Labels	cCSAus Dry Location Listed

P5143-0930K9



Dimensions:

Diameter: 12-3/4 in
 Height: 10-7/8 in
 Overall Ht. W/Stem And Swivel: 77 in

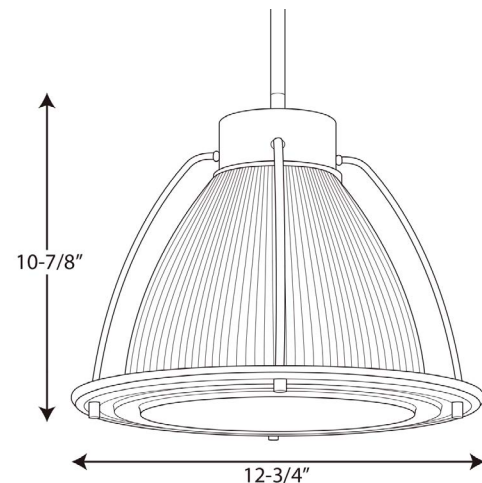

P5143-0930K9

Dimming Notes:

P5143-0930K9 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Nova T NTELV-300

Lutron_Vierti VTELV-600

Lutron_Maestro MAELV-600

Lutron_spacer/system SPSELV-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.