

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers



Wire strippers


HARDWARE INCLUDED

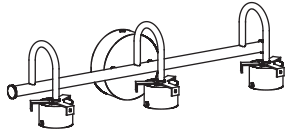

Fixture



Glass



Glass Shade




Decorative Screws



Screws



Screwdriver



Mounting Unit




Mounting Screws



Wire Nuts

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


EXPLODED PARTS

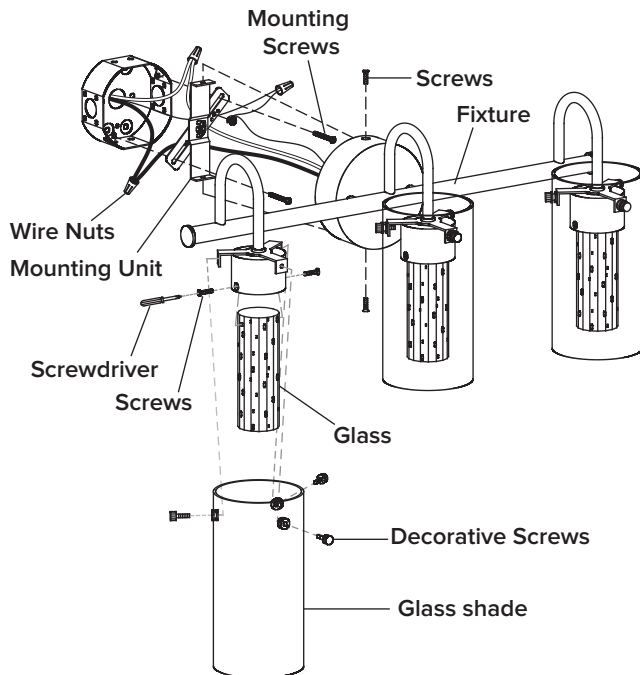

INSTALLATION



STEP 1

Use the **mounting screws** to attach the **mounting unit** to the junction box.

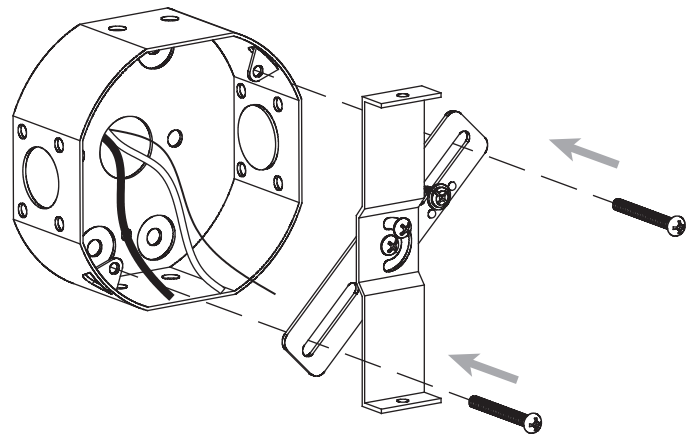

STEP 2


Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

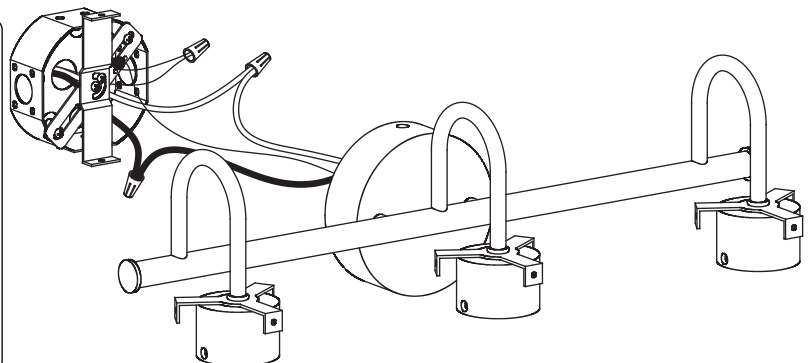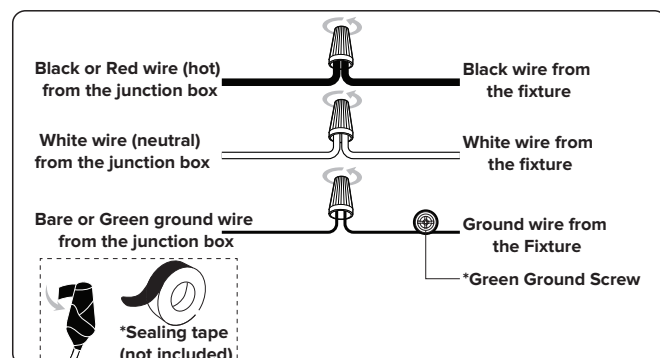

ASSEMBLY INSTRUCTIONS (INSTALLATION)


STEP 3

Attach the **fixture** to the **mounting unit** through screw holes as shown, and secure it with **screws**. Tighten the **screws** with a **screwdriver**.

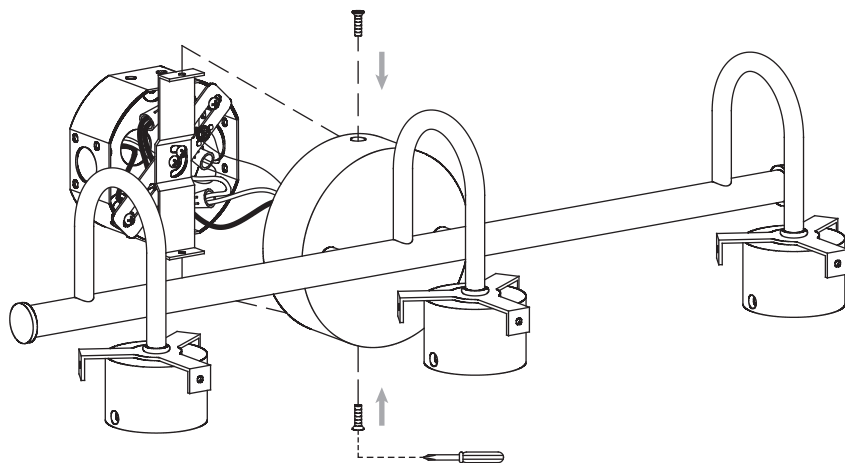

STEP 4

Attach the **glass** into **fixture** using **screws** as show. Tighten the **screws** with a **screwdriver**.

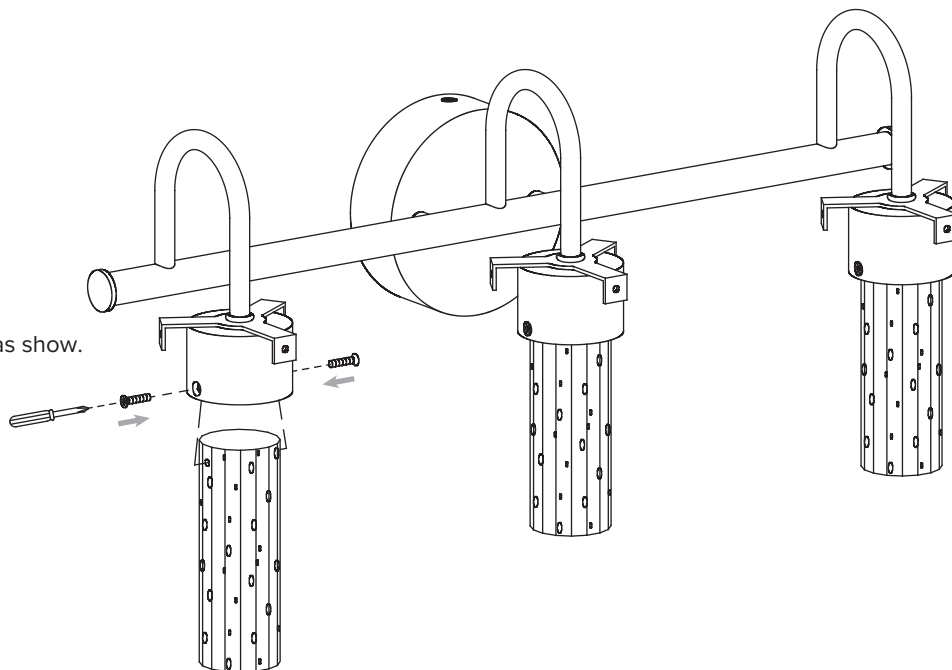

STEP 5

Attach the **glass shade** onto **fixture** using **decorative screws** as show.

