

SERKO®

CR80 SERIES WORKING LAMP

Highpower LED Technology

1600 Lm



Compact and Elegant Design

Thermal Conductive
Polymer Body

Integrated
Connector

2000 Lm

High Illumination
With Optimum
Reflector
Design

IP69K
Waterproof

TECHNICAL DETAILS

Functions	Working Lamp
Operating Voltage	9V - 60V
Light Source Type	High-Power LEDs
Light Output	3 LED 1600Lm ±%10 4 LED 2000Lm ±%10
Color Temperature	6500K ±%10
Working Temperature	-40°C and +80°C (-40°F and +176°F)
Opposite Connector	Delphi 12124817 or Deutsch DT06-2s
Protection Class	IP69K
Type Approval	ECE R10, ISO 7637-2 (Pulse5), ISO 13766, ISO 14982, EN 12895
Weight	~ 300g (~0,66lb)
Dimensions (Ø x H)	Ø80mm x 65 mm (Ø3,15 x 2,55in) with Deutsch Connector Ø80mm x 75 mm (Ø3,15 x 2,95in) with Delphi Connector

All Bolts and Nuts
Stainless Steel Washer



PATENT
PENDING

9V - 60V



RUSTLESS



Quality is never coincidence.

İlhami TÜTEK
Founder 1973



PARTS NO

PARTS NAME

0001.3735.X01

CR80 CP 3 LED WL,DELPHI CONNECTOR CLEAR LENS

0001.3735.X11

CR80 CP 3 LED WL,DELPHI CONNECTOR STRIPED LENS

0001.3735.X00

CR80 CP 3 LED WL,DEUTSCH CONNECTOR CLEAR LENS

0001.3735.X10

CR80 CP 3 LED WL,DEUTSCH CONNECTOR STRIPED LENS

0001.3736.X01

CR80 CP 4 LED WL,DELPHI CONNECTOR CLEAR LENS

0001.3736.X11

CR80 CP 4 LED WL,DELPHI CONNECTOR STRIPED LENS

0001.3736.X00


CR80 CP 4 LED WL,DEUTSCH CONNECTOR CLEAR LENS

0001.3736.X10

CR80 CP 4 LED WL,DEUTSCH CONNECTOR STRIPED LENS



ASSEMBLY TEMPLATE

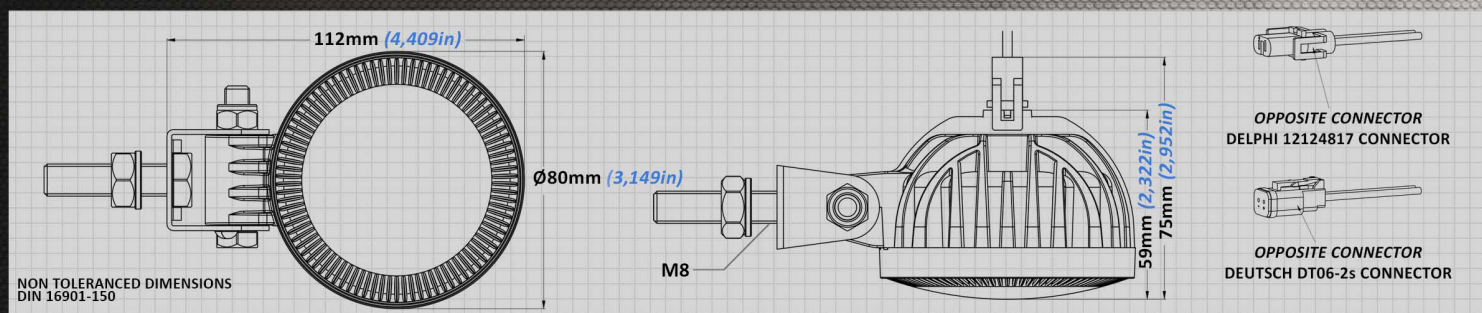

PRODUCT SERIES

SERKO®



SERKO®

SERKO®
Ankara - TÜRKİYE

SERKO
Taunusstein - GERMANY

SERKO
Chicago - ILLINOIS

www.serko.com.tr
www.serkogmbh.com
www.serkouusa.com

3735.2404

