

LG REFRIGERATION

LSXS26336_

Ultra Large Capacity Side-By-Side Refrigerator

26.2 cu.ft.

Fingerprint & Smudge Resistant Finish (Black Stainless Steel & Dark Graphite Only)

SpacePlus® Ice System

10-Year Manufacturer's Limited Warranty on Linear Compressor

Multi-Air Flow Cooling

Premium LED Lighting

LoDecibel™ Quiet Operation

SmartDiagnosis™ System

Available in Dark Graphite, Black Stainless Steel & Stainless Steel



CAPACITY	
Refrigerator	17.00 cu. ft.
Freezer	9.20 cu. ft.
Total	26.2 cu. ft.
FEATURES	
Energy	716 kWh/Year
Ice & Water Dispenser	Yes
Dispenser Type	Integrated Tall Ice & Water
Ice System	SpacePlus®
Daily Ice Production	3.5 lbs / 4.1 lbs (IcePlus)
Ice Storage Capacity	4.5 lbs
Cube & Crushed Ice	Yes
Water Filtration System	LT800P LT1000P (STS Only)
Dispenser Light	Yes
Multi Air Flow Cooling	Yes
Temperature Sensors	5
Display Type	Membrane / Green LED
Temperature Controls	Electronic/Digital
Linear Compressor	Yes
Door Alarm	Yes
Child Lock	Yes
LoDecibel™ Quiet Operation	Yes
Auto Closing Door Hinge	Yes (Cam Hinge Type)
REFRIGERATOR	
No. of Shelves	3
Shelf Construction	Tempered Glass
Crisper Bins	2
Refrigerator Light	Ceiling LED
REFRIGERATOR DOOR	
No. of Shelves/Bin	4 Total
Door Bin Construction	1 Piece (Clear)
Dairy Corner	Yes
FREEZER	
Door Type	Side Swing
No. of Shelves	3

No. of Door Bins / Construction	2 / 1 Piece (Clear)
No. of Drawers	1
Freezer Light	Premium LED
Ice Bin / In Door Ice	Yes
MATERIALS AND FINISHES	
Fingerprint & Smudge Resistant Finish	Black Stainless Steel (D) & Dark Graphite (V)
Contour Door	Yes
Hidden Hinges	Yes
Surface	Smooth
Back	Flush & Metal cover over mechanical parts
Available Colors	Black Stainless Steel (D), Dark Graphite (V), Stainless Steel (S)
Handles	Matching Commercial Handles
DIMENSIONS/CLEARANCES/WEIGHT	
Depth with Handles	36 5/16"
Depth without Handles	34"
Depth without Door	29 1/16"
Depth (Total with Door Open)	51 1/8"
Height to Top of Case	69 3/8"
Height to Top of Door Hinge	70 1/4"
Width	35 7/9"
Width (Door Open 90° with Handle)	44 1/5"
Width (Door Open 90° without Handle)	39 1/4"
Door Edge Clearance with Handle	1 3/8"
Door Edge Clearance without Handle	3/8"
Installation Clearance Sides	Sides 1/8", Top 1", Back 2"
Weight (Unit/Carton)	264 lbs. / 290 lbs.
Carton Dimensions (WxHxD)	38 1/2" x 72 1/4" x 37 31/64"
LIMITED WARRANTY	
1 Year Parts & Labor, 5 Years on Sealed System (Parts & Labor), 5 Years on Compressor (Parts & Labor), 6-10 Years Linear/Inverter Compressor (Parts Only)	
UPC CODES	
LSXS26336V Dark Graphite	048231787512
LSXS26336D Black Stainless Steel	048231787727
LSXS26336S Stainless Steel	048231796361

LG REFRIGERATION

LSXS26336_

Ultra Large Capacity Side-By-Side Refrigerator



QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS/CLEARANCES/WEIGHTS

A Depth without Handles	34"
B Width	35 7/9"
C Height to Top of Case	69 3/8"
D Height to Top of Door Hinge	70 1/4"
E Back Clearance	2"
F Depth without Door	29 1/16"
G Depth (Total with Door Open)	51 1/8"
M Depth with Handles	35 5/16"
Width (Door Open 90° with Handle)	44 1/5"
Width (Door Open 90° without Handle)	39 1/4"
Door Edge Clearance with Handle	1 3/8"
Door Edge Clearance without Handle	3/8"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Carton Dimensions (WxHxD)	38 1/2" x 72 1/4" x 37 31/64"

PRODUCT DIMENSIONS

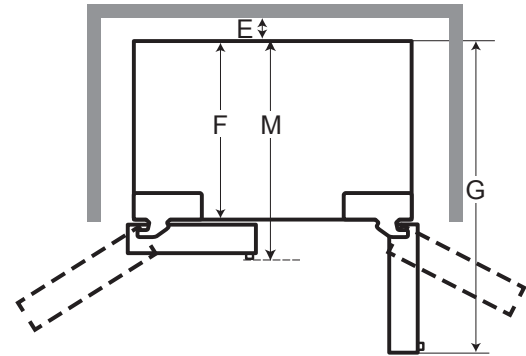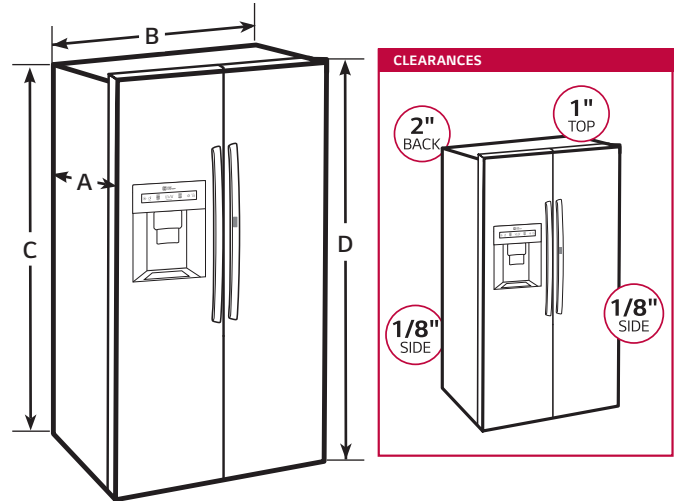

CHOOSING THE PROPER LOCATION

WATER

Select a place where a water supply can be easily connected for the automatic

NOTE

- The water pressure must be 20 – 120 psi or 138 – 827 kPa or 1.4 – 8.4 kgf/cm². If the refrigerator is installed in an area with low water pressure (below 20 psi), you can install a booster pump to compensate for the low pressure.

ELECTRICITY

The refrigerator should always be plugged into its own individual properly grounded electrical outlet rated for 115 Volts, 60 Hz, AC only, and fused at 15 or 20 amperes. This provides the best performance and also prevents overloading house wiring circuits which could cause a fire hazard from overheated wires. It is recommended that a separate circuit serving only this appliance be provided.

WARNING

- To reduce the risk of electric shock, do not install the refrigerator in a wet or damp area.

FLOORING

To avoid noise and vibration, the unit must be leveled and installed on a solidly constructed floor. If required, adjust the leveling legs to compensate for the unevenness of the floor. The front should be slightly higher than the rear to aid in door closing. Leveling legs can be turned easily by tipping the cabinet slightly. Turn the leveling legs to the left to raise the unit or to the right to lower it.

NOTE


- Installing on carpeting, soft tile surfaces, a platform or weakly supported structure is not recommended.

AMBIENT TEMPERATURE

Install this appliance in an area where the temperature is between 55°F (13°C) and 110°F (43°C). If the temperature around the appliance is too low or high, cooling ability may be adversely affected.

CONNECTING POWER AND SECURING SPACE FOR WATER SUPPLY PIPE


- Make sure the location of the water supply pipe is within the marked range.
- Before connecting the power, always make sure to ground the product. (If the product is not grounded, the user may be able to feel the electricity due to the minute leakage current when touching the refrigerator door handle or side corner even when there is no issue with the product.)
- Do not ground the product to gas pipe, plastic water pipe or telephone wire etc. It can cause electric shock and explosion.



Power connection

The location of the 115V 60Hz power connector must be located on the rear side of the product as shown in the picture.

When installing the product, make sure to check whether the cord is hung on the hook on the rear side so that it is not pressed on the refrigerator. Damaged power cord can cause a fire.

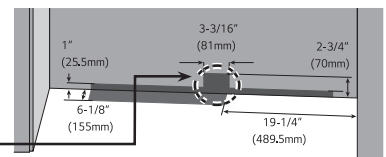

Installation space for water supply pipe

Place the water hose for ice maker and water dispenser as shown in the picture, and prepare hose to come up from the floor. (Copper pipe with diameter of 5/16" (8mm) is recommended for the water hose.) If the water pipe and water hose is located far from the product, bury the water hose on the floor and provide appropriate treatment.

