



Bathroom Shower Enclosure

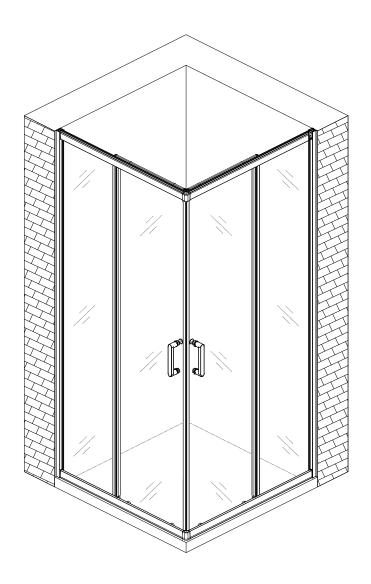

Product Breakdown Diagram

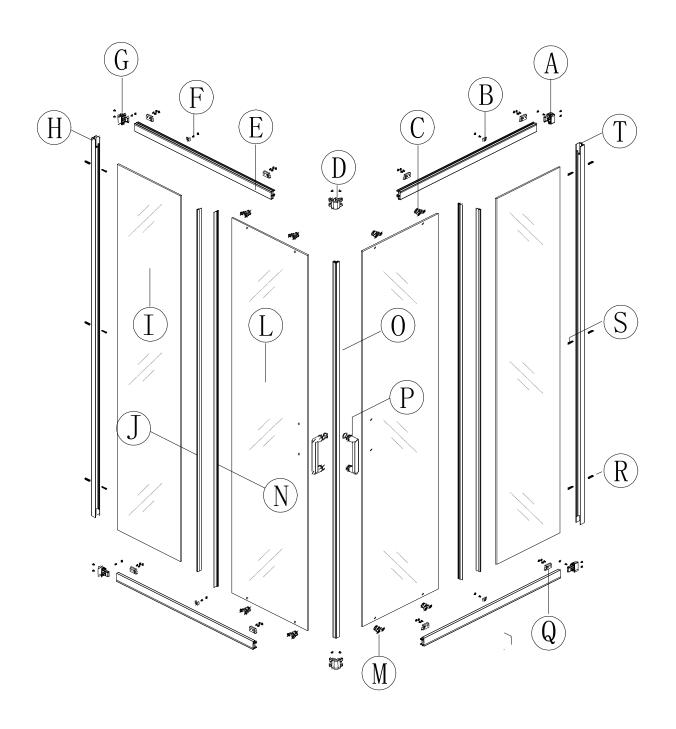

If you have any questions or concerns please contact us:

(+1) 312-626-9466 service@deervalleybath.com

INSTALLATION INSTRUCTIONS

General Information

Please inspect the product immediately upon receipt for any transit damage, missing parts, or manufacturing faults. Damage reported at a later time cannot be accepted. Please handle the product with care, avoiding knocks and shocks to all sides and edges of the glass.

Please read these instructions carefully before starting the installation. Special care should be taken when drilling walls to avoid hidden pipes or electrical cables.

Note: This product is heavy and requires two people for installation.

Cleaning and Maintenance

- 1. For daily cleaning of the shower enclosure, you can use a mild liquid detergent and a soft cloth.
- 2. If there are stains, gently wipe them with a clean, soft towel or a small amount of neutral soap solution or toothpaste.
- 3. To enhance the shine of the glass surface, you can polish it using a glass polish.

Attention

- 1. Avoid using acids, alkalies, or sharp tools when cleaning to protect the gloss of the shower tray, glass, and aluminum fittings.
- 2. Do not use strong detergents containing acetone or ammonia; avoid disinfectants with formic acid and formaldehyde to prevent damage to the product's surface gloss.
- 3. During showering, avoid contact or impact with hard objects against the glass surface to prevent accidents.
- 4. Regularly inspect the condition of the shower enclosure and contact the after-sales service department promptly if any abnormalities are detected.


Tools Details (Not Included)

Tool Name	Illustration
Tape Measure	
Spirit Level	
Marker Pen	
6mm Drill Bit	20
Art Knife	


Tool Name	Illustration
Drill	
Hammer	
Screwdriver	
Allen Wrench	
Silicone Sealant	

INSTALLATION INSTRUCTIONS

Parts List

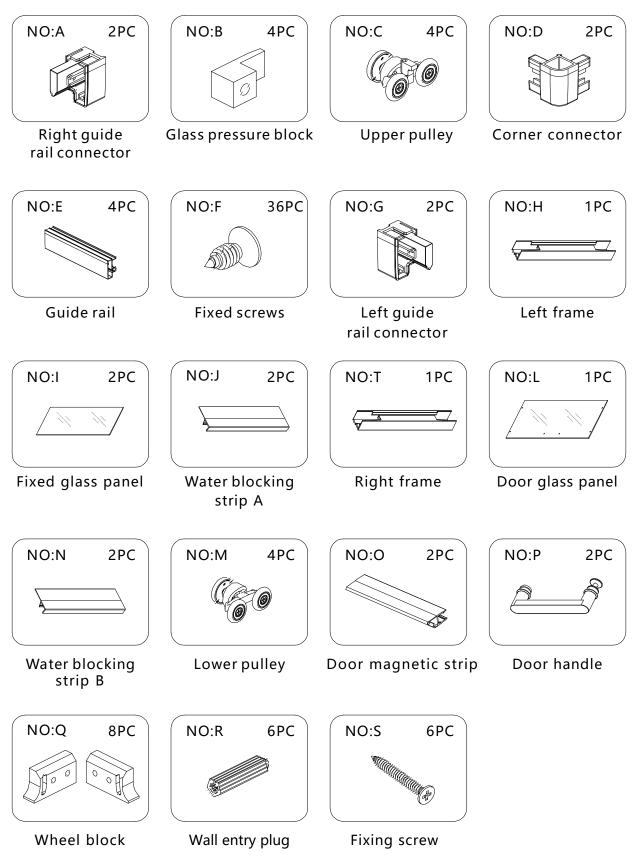


Installation steps

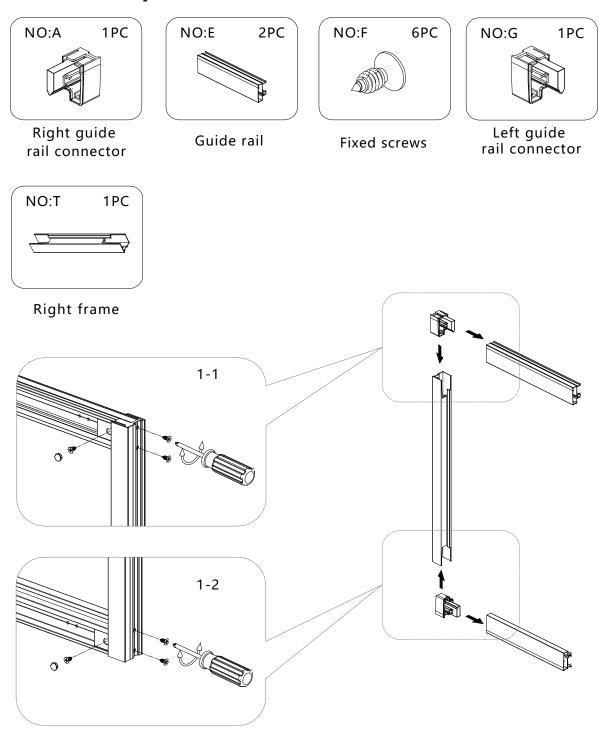

Step 1: Assemble the left frame


- 1-1. Insert the upper guide rail connector into the frame and guide rail respectively, secure it with screws, and cover it with a decorative cap.
- 1-2. Insert the lower guide rail connector into the frame and guide rail respectively, secure it with screws, and cover it with a decorative cap.

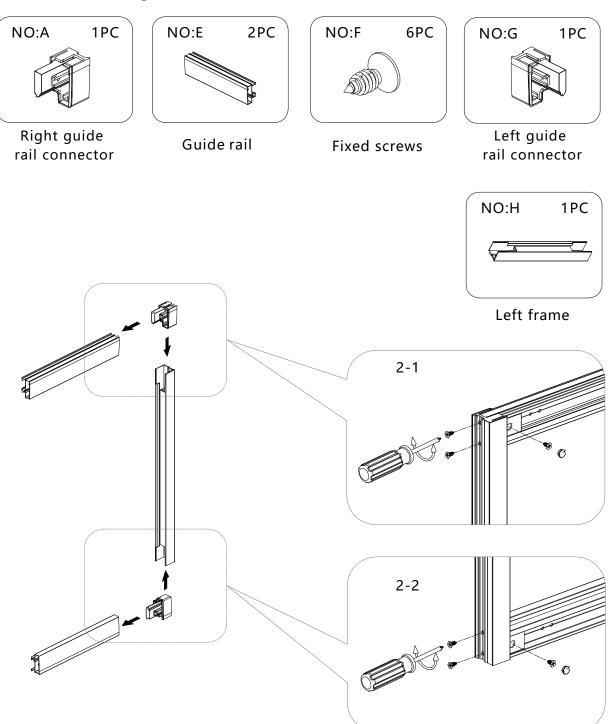


Step 2: Assemble the right frame

- 2-1. Insert the upper guide rail connector into the frame and guide rail respectively, secure it with screws, and cover it with a decorative cap.
- 2-2. Insert the lower guide rail connector into the frame and guide rail respectively, secure it with screws, and cover it with a decorative cap.


Installation steps





Corner connector


Fixed screws

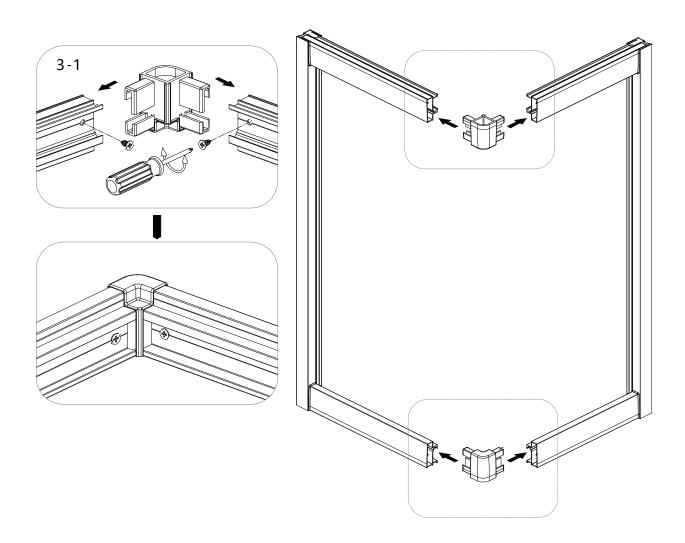


Step 3: Install corner components

3-1. Insert the corner connectors into the upper and lower guide rails respectively (frame in step 2/3), and secure them by tightening the screws for reinforcement.


Installation steps








Wheel block


Fixed screws










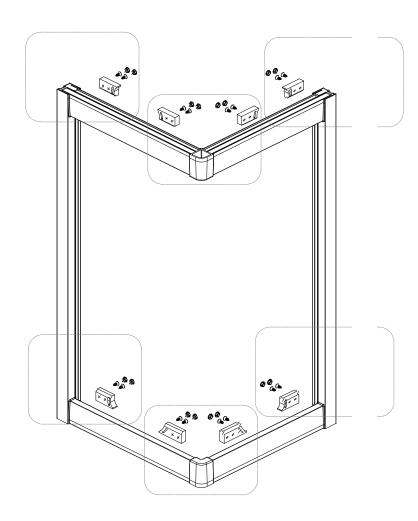



Step 4: Install the wheel block

4-1. When installing, pay attention to the orientation of the wheel block, and ensure proper alignment during installation.




Wheel block diagram








Wall entry plug


Fixing screw












INSTALLATION INSTRUCTIONS

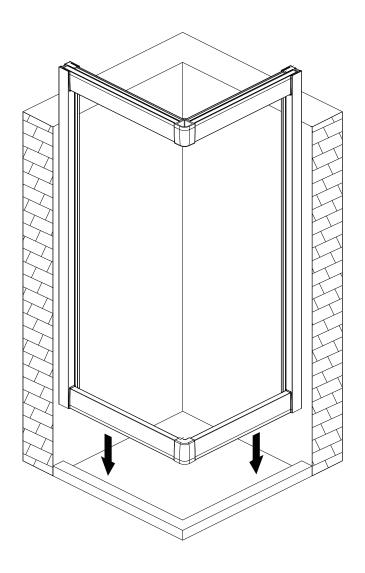


Step 5: Frame positioning

- 5-1. Place the frame on the floor/base and adjust it horizontally.
- 5-2. Mark and locate the wall lock holes.
- 5-3. Drill holes for marked points with a diameter of 6mm.
- 5-4. Insert a wall entry plug into the drilled wall hole until the end is level with the wall surface.
- 5-5. Secure with screws.

INSTALLATION INSTRUCTIONS

Installation steps

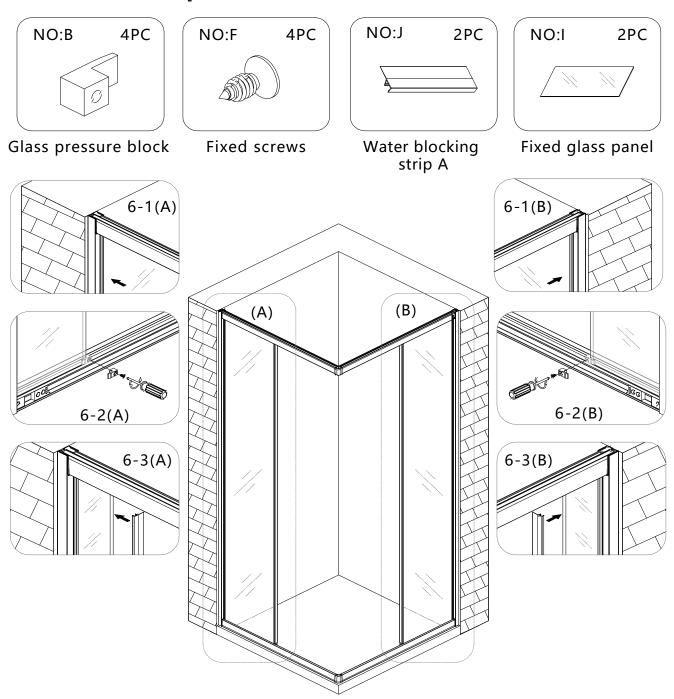


Step 6: Install the Fixed Glass and Water Blocking Strip

6-1 (A/B): Insert the fixed glass into the left and right frame slots respectively.

6-2 (A/B): Secure glass pressure blocks on both ends to prevent the glass from falling off.


6-3 (A/B): Install water blocking strips on both sides of the fixed glass, paying attention to the direction (with the soft edge facing inward).

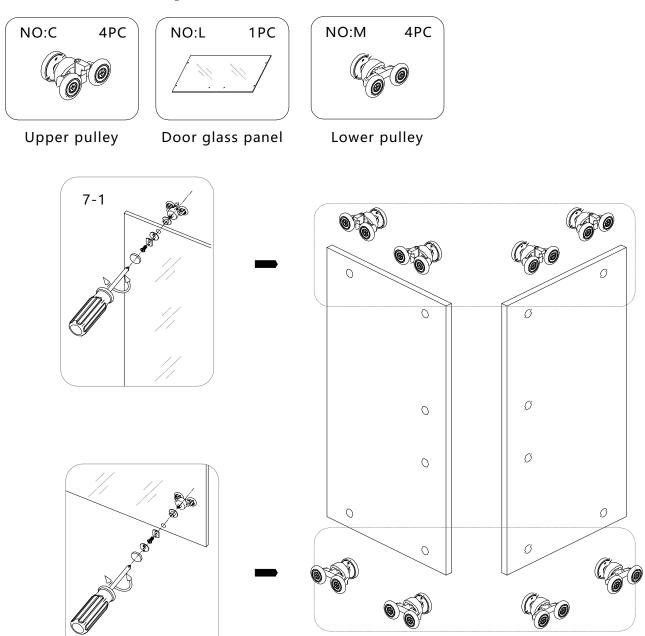

Step 7: Install the Upper and Lower Pulleys


7-2


- 7-1. When installing the upper pulley, please pay attention to the distinction between the upper and lower pulleys (the upper pulley is equipped with a debugging screw).
- 7-2. When installing the lower pulley, please pay attention to the distinction between the upper and lower pulleys (the lower pulley is equipped with a spring).

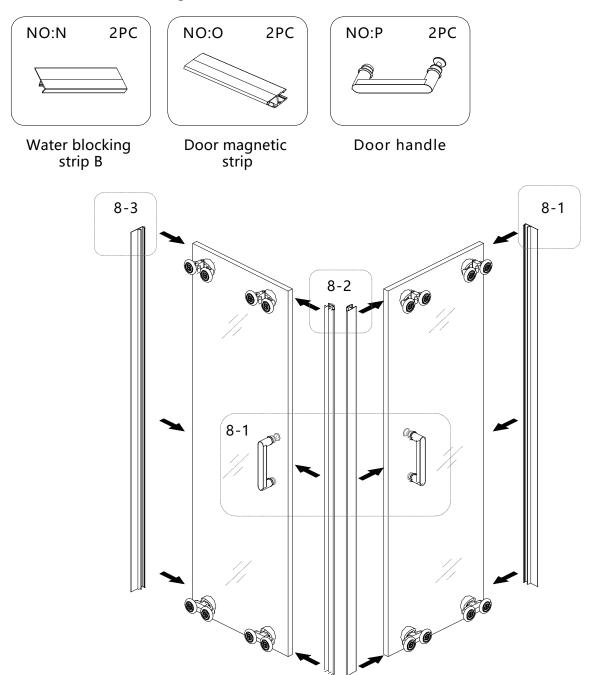



Step 8: Install the Handle / Door Magnet / Water Blocking Rubber Strip B

- 8-1. Install the handle (pay attention to the direction), with the vertical handle facing outward and the circular mushroom head facing inward.
- 8-2. Install the door magnetic strip (pay attention to the direction), with the inclined plane facing inward. After the door magnet is attracted, it should be in a 90-degree state.
- 8-3. Install the water blocking strip B (pay attention to the direction), with the soft edge facing outward.

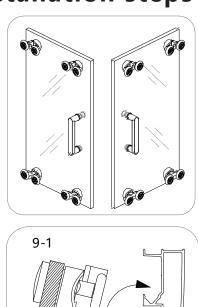




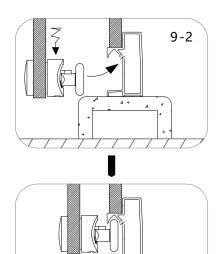

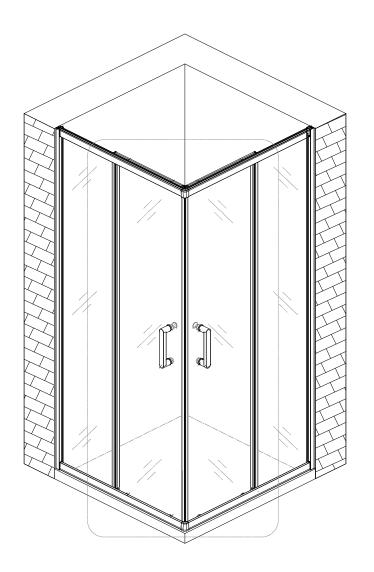


Step 9: Hang the Door Glass


- 9-1. First, hang the pulley on the door glass into the upper guide rail groove (pay attention to distinguishing the left and right sides of the door glass).
- 9-2. Press the lower pulley down and hook it into the groove of the lower guide rail. (Note: The lower pulley is equipped with a spring).

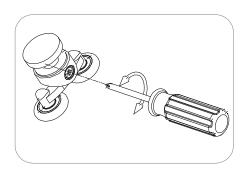

Upper Pulley Debugging Points




Correct State



Error Status





Error Status

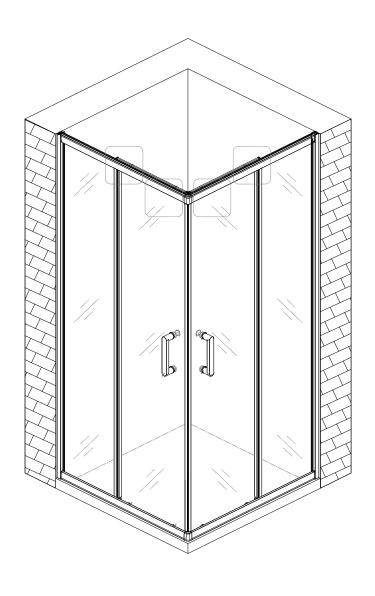


Step 10: Door Glass Debugging Guidelines

10-1. After the installation of the door glass, if there is any phenomenon of non-verticality, shaking, or inability to attract the door magnet, use a cross screwdriver to adjust the upper pulley. Rotate the door glass to the right to raise it and to the left to lower it.

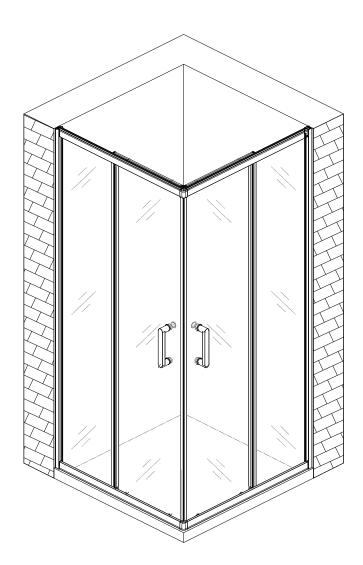



After installation, confirm that there are no abnormalities, and apply sealant for waterproofing

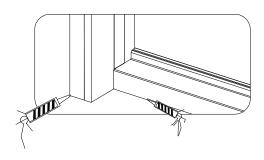

Step 11: Final Inspection After Product Installation

- 11-1. The overall installation has been completed. Check whether the components are loose, whether the screws are locked, and whether the room is in a vertical state.
- 11-2. After the overall inspection is completed, install the decorative caps of each component and apply sealant for waterproofing to the entire structure.
- 11-3. After general cleaning, wait 24 hours before using.





LIMITED WARRANTY COVERAGE

1 YEAR LIMITED WARRANTY

DeerValley products are made with quality materials and excellent craftsmanship to provide the customers a long-lasting product. In the case of any defects in materials or craftsmanship under regular use were inspected in the first one year of delivery, DeerValley will provide replacement parts at no charge, or at its option, replace any product or part of the product that is deemed defective, under normal installation, use, service and maintenance. This warranty applies only to the original purchaser. Proof of purchase will be required in the case of a claim. SCRATCHES ARE NOT COVERED UNDER WARRANTY.

The manufacturer warrants this product to be free of manufacture defects during the above mentioned warranty time. Please keep a copy of the original invoice as proof of purchase.

DeerValley will, as its option, (1) repair or replace the defective part(s) or product(s) at no charge; (2) issue a refund of the original purchase price of the product(s) (Valid within 30 days from the date of delivery); or (3) issue a credit to be applied toward the purchase of a new DeerValley product shipping/delivery charges may apply and are in DeerValley sole discretion.

DeerValley recommends the installations to be made by a licensed, professional plumber. DeerValley will not be held responsible for any damage or product failure due to improper installation, misuse, or failure to use a licensed professional. DeerValley is not responsible for any removal or installation cost.

This limited warranty shall not apply to goods which have been subject to accident, negligence, improper installation, product abuse, product misuse, or use of cleaners containing abrasives, alcohol or other organic solvents, whether performed by a contractor, service company, or yourself, are excluded from this warranty.

DeerValley responsibility under this limited warranty is limited to only to replacement parts and no other costs. DeerValley will not be responsible for labor charges and/or damage incurred by installation, repair or replacement, nor for any indirect incidental or consequential damages, losses, injury or costs of any nature relating to this product Except as provided by law, this limited warranty is in lieu of and excludes all other warranties, conditions, and guarantees, whether expressed or implied, statutory or otherwise, including without restriction those merchantability of fitness for use.

RESPONSIBILITIES OF OTHERS

Inspecting the unit prior to installation is the responsibility of the installer or building contractor who acts on behalf of the user. They are responsible for ensuring the unit is free of defect or damage.

Notices are placed on and in the unit and on the shipping carton advising the installer of this responsibility.

In the event of a problem, the unit must not be installed. DeerValley is not responsible for failures or damage that could have been discovered, repaired, or avoided by proper inspection and testing prior to installation.

Damage occurring in transit is the responsibility of the carrier. The user or installer MUST open the crate and inspect the unit for damage when it is delivered. If damage is discovered, it must be reported immediately to the seller and the carrier in writing, and an inspection requested. Failure of the carrier to respond should be reported to the seller and the carrier. Your freight claims should be filed promptly thereafter.

LIMITATIONS AND EXCLUSIONS

This warranty does not cover instances of negligence, misuse, abuse, improper installation, carelessness, accident, hard water ormineral deposits, exposure to corrosive materials, misapplication, damages caused by improper maintenance, alteration of theproduct, or failure to follow care or installation instructions enclosed with your product. The warranty becomes invalid if the DeerValley product undergoes any alterations or if attempts are made to carry out repairs using unauthorized accessories or parts from DeerValley.

DeerValley will not be liable for loss of use of the DeerValley products, inconvenience, or any other incidental or consequential costs, expense or damages. Please note that some states do not allow the exclusion or limitation of incidental damages.

DISCLAIMER

Except as expressly provided, there shall be no warranty or obligation, express or implied, oral or statutory. No dealer or other person has the authority to make any warranties or representations concerning DeerValley or its products. In no event shall DeerValley be held respon sible for any such warranties or representations.

WARRANTY SERVICE

NOTE: When requesting warranty, be sure to have the following:

- Copy of original invoice
- Date of installation
- •Description and pictures of defect
- •Model number or description of model

To obtain warranty service and replacement part, please contact DeerValley Customer Service. DeerValley will determine whether to repair or replace your product, issue a refund, or issue a credit.