
INSTALLATION INSTRUCTIONS

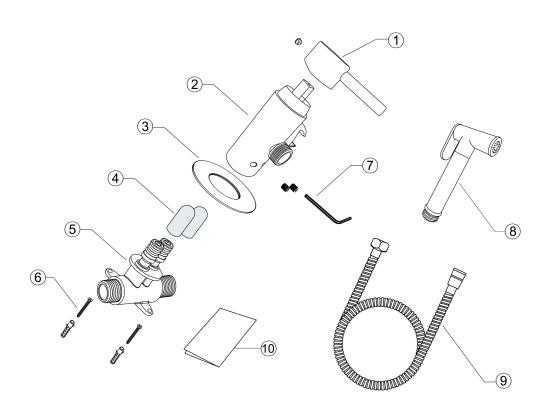


Parts list


NO	NAME	QTY	NO	NAME	QTY
1	Handle	1	6	Screw bag	1
2	Mixer body	1	7	Allen key	2
3	Decorated cover	1	8	Bidet sprayer	1
4	Protected cover	2	9	Bidet hose	1
(5)	3 Ways body	1	10	Manual	1

Instructions for use

1. Turn on the faucet as picture 1 shows. The greater the handle angle, the greater the water flow; Conversely, the smaller the handle angle, the smaller the water flow, until it is closed.



2. Turn on the faucet. Adjust handle to left to get more hot water; Adjust handle to right to get more cold water. Showed as picture 2.



Cautions:

- 1.Before installation, all water lines must be flushed at least 60 seconds to remove any foreign material so that the foreign material will not damage the cartridge.
- 2. After installation, please check if all connections were well installed, and make sure there are no leakage.
- 3. Use water and soft cloth to clean the faucet.
- 4. Use a mild liquid detergent for cleaning, do not use abrasive detergent that may scratch or dull the surface.



/\ Warning:

You can seal the wall only when there are no any leakage after installing the 3 ways body and water pipe.


INSTALLATION INSTRUCTIONS

For cold water pipe


1.Use special tools to chisel holes on wall for installing 3 ways body, hot and cold water pipe. Note: Recommended depth for installing 3 ways body before tiling tiles: 35-40mm (or 1.38"-1.57").

For hot water pipe


2. Loose screws with allen key then take off the 3 ways body.




3.Put the plastic protected cover on the thread side of 3 ways body; Connect water pipes to 3 ways body as picture shows, then fix the 3 ways body with screws.




4. Prepare tiles. Note: Tile opening should be bigger than decorated cover opening at least 15 mm (or 0.59").




5.Switch on/off the cartridge, check all connectors without any leakage. Then seal the wall with tiles.



6.Put decorated cover on the mixer body; fix handle with allen key as picture show



7.Connect mixer body to the 3 ways body then fix it with screws.



8.Connect bidet hose to mixer body and bidet sprayer then put bidet sprayer to holder.

