

Schluter®-KERDI-LINE-VARIO

Variable length linear drain for tiled showers



10 in. to 8 ft.
25 cm to 244 cm

Now in Nine **TRENDLINE** Colors!





Versatile.
Vogue.
VARIO.

Schluter®-KERDI-LINE-VARIO

Offers the ultimate in flexibility and style

Cutting Edge

Traditional linear drains come in fixed sizes, making it hard to find the right fit during project planning. KERDI-LINE-VARIO solves this by offering two lengths—4 feet and 8 feet—that can be easily cut on-site to the required size. End caps are included to provide a clean, finished look on the cut edges.

Flexible, Innovative Design


Unlike traditional linear drains, the channel is part of the grate assembly, not the drain body. This allows both the channel and grate to be cut on either end, giving you more flexibility in positioning the flange based on the drain outlet location.

Function Meets Style

Linear drains are known for their sleek, modern appearance. KERDI-LINE-VARIO features a slim design and is available in four grate styles and nine TRENDLINE finishes, along with brushed stainless steel, to complement the latest tile trends. Pair it with large-format tile for a seamless, unified bathroom floor with minimal grout lines.

A Complete System


Part of the Schluter®-Shower System, KERDI-LINE-VARIO is designed for use in waterproofing applications and is easy to install with Schluter®-KERDI-SHOWER-LT/-LTS trays or in mortar bed setups. It works for both wall-adjacent and center drain installations.

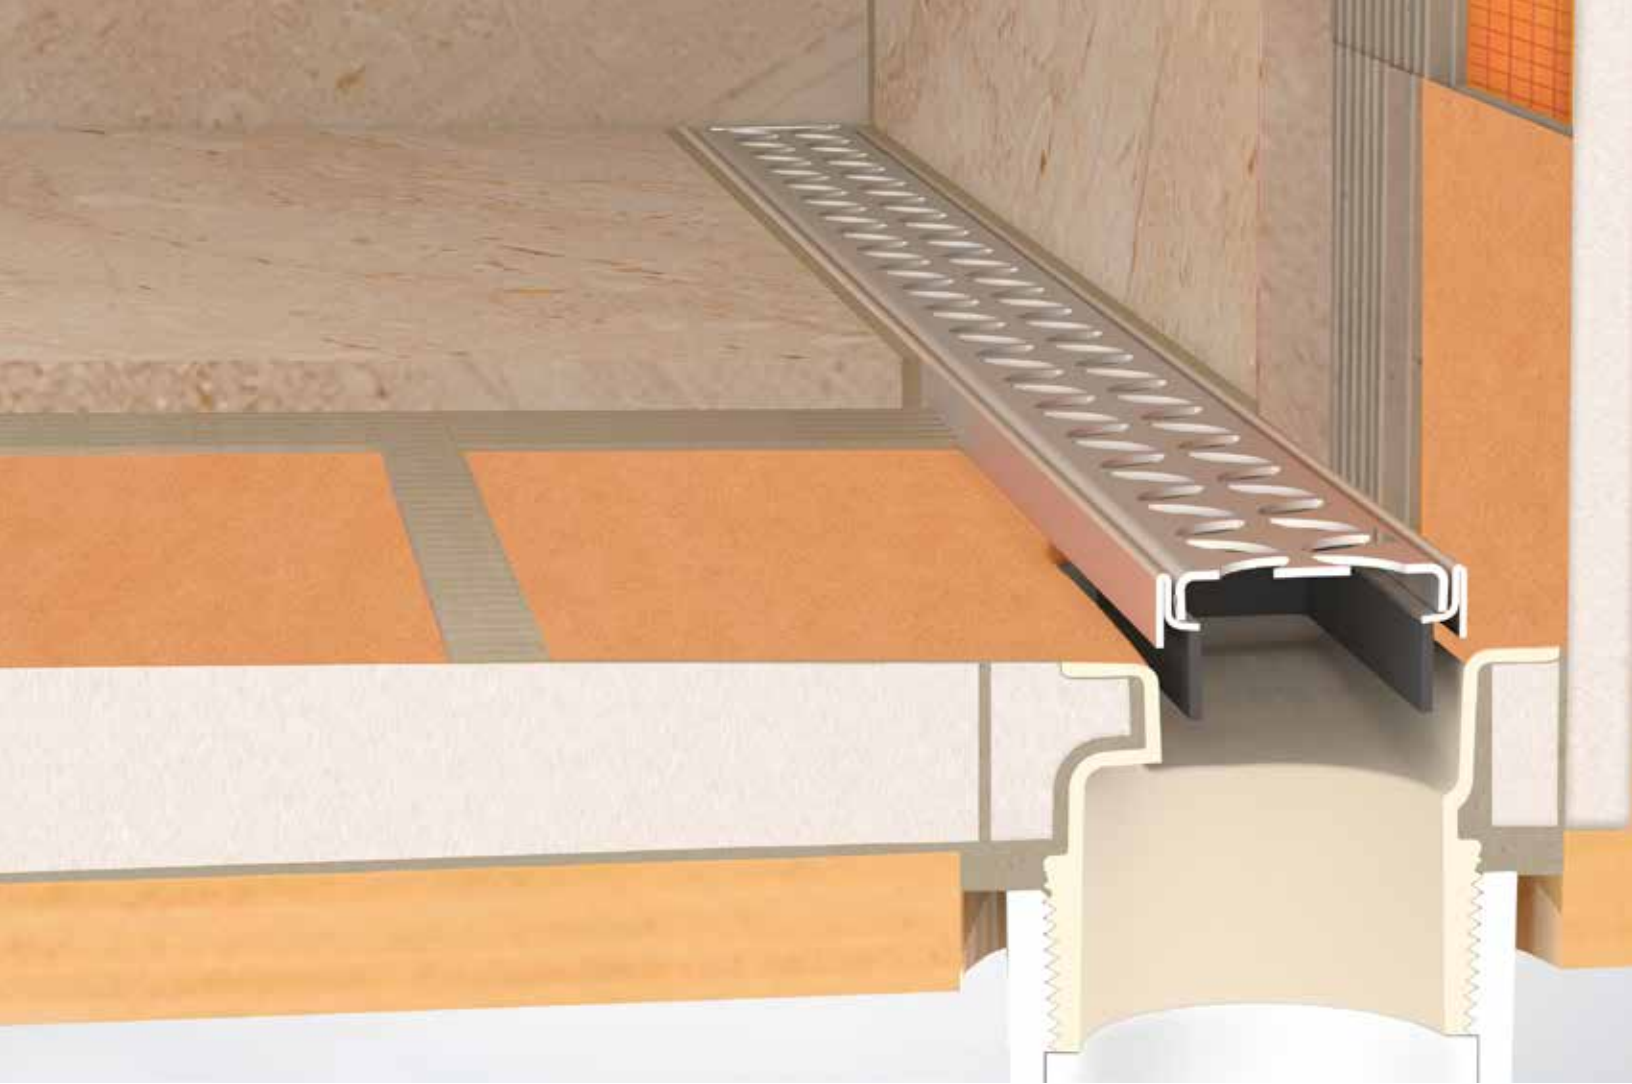

KERDI-LINE-VARIO

The Flange

The KERDI-LINE-VARIO flange is made of a polypropylene drain body with a standard 2" (50 mm) NPT outlet, which easily connects to the drainpipe using a threaded coupling. The flange has an integrated KERDI collar around the perimeter, ensuring a secure waterproof connection to the floor and adjacent walls. It works with KERDI-SHOWER-LT/-LTS prefabricated shower trays and mortar bed installations.

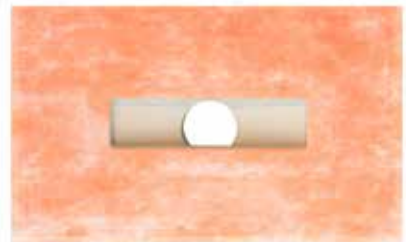

- Compatible with all KERDI-LINE-VARIO grate sizes
- Integrated KERDI collar for a secure, waterproof connection
- Includes both ABS and PVC couplings

• Certifications:  

Flange Kit Components

Construction cover



Downspout



Polypropylene flange with integrated KERDI collar



ABS and PVC coupling



Flange support





Waterproofing corners
(4 inside, 2 outside)



Pipe seal – 3/4" (20 mm)
Mixing valve seal – 4-1/2" (114 mm)



Cleaning brush and
grate removal tool

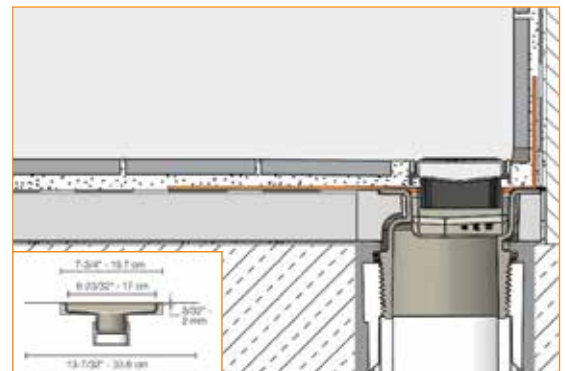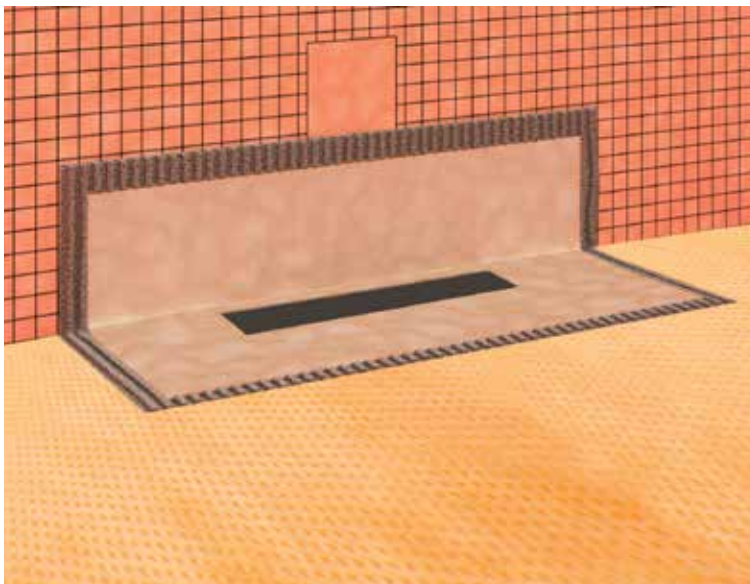

Flange Kit

Item No.

KL VR 2 FLK



KERDI-LINE-VARIO

The Grate and Channel

The KERDI-LINE-VARIO grate and channel are made of stainless steel and can be trimmed to fit custom shower sizes. The channel has a central drainage opening that can be positioned anywhere along its length to avoid obstacles like floor joists, offering flexibility in flange placement.


The grate fits into the channel with minimal visible edge after installation. End caps are included for a clean finish once trimmed. KERDI-LINE-VARIO is available in 4-foot (122 cm) and 8-foot (244 cm) lengths, with four grate designs: SQUARE, FLORAL, HERRINGBONE, and SLANT.

- Slim design: only 1-11/16" (43 mm) wide
- Easy to customize to just the right length
- 9 textured, color-coated stainless steel TRENDLINE finishes, and brushed stainless steel


- Certifications:  



Grate and Channel Components

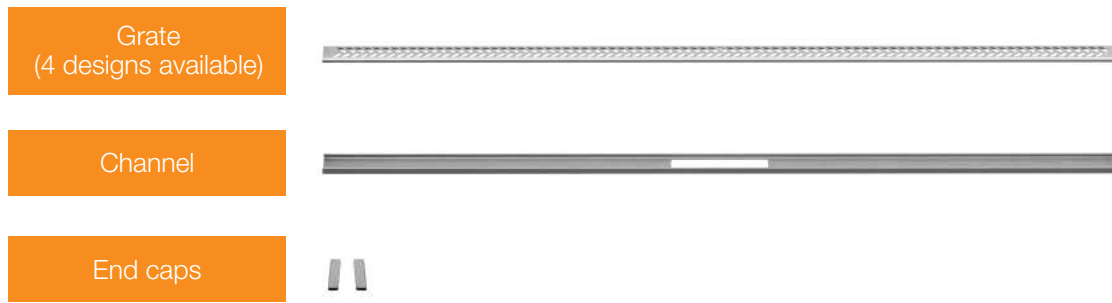

Grate Designs

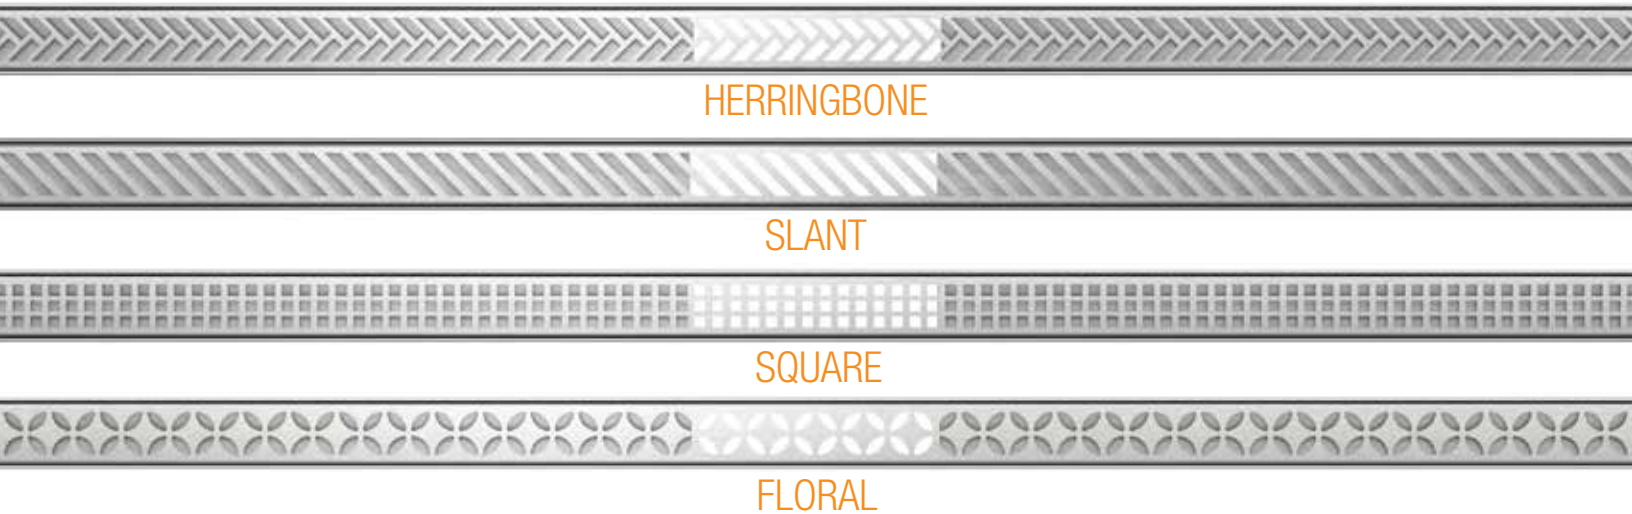


Brushed stainless steel

Grate and Channel Kit – Brushed stainless steel				
Length	HERRINGBONE	SLANT	FLORAL	SQUARE
	Item No.	Item No.	Item No.	Item No.
48" (122 cm)	KL VRI D13 EB 122	KL VRI D14 EB 122	KL VRI D5 EB 122	KL VRI D3 EB 122
96" (244 cm)	KL VRI D13 EB 244	KL VRI D14 EB 244	KL VRI D5 EB 244	KL VRI D3 EB 244

Schluter®-TRENDLINE textured color-coated stainless steel

Grate and Channel Kit – Textured color-coated stainless steel				
* To complete the item number, add the color code (e.g., KL VRI D3 TSI 122).				
Length	HERRINGBONE	SLANT	FLORAL	SQUARE
	Item No.	Item No.	Item No.	Item No.
48" (122 cm)	KL VRI D13 + color* 122	KL VRI D14 + color* 122	KL VRI D5 + color* 122	KL VRI D3 + color* 122
96" (244 cm)	KL VRI D13 + color* 244	KL VRI D14 + color* 244	KL VRI D5 + color* 244	KL VRI D3 + color* 244

*Color Codes:



Notes:

- The shortest allowable length to cut the channel and grate is 10" (25.4 cm)
- The minimum recommended tile thickness to use with the KERDI-LINE-VARIO channel is 3/8" (10 mm)

KERDI-LINE-VARIO or KERDI-LINE

Which Linear Drain is Right for Me?

Planning your shower design and unsure which drain to choose? We've put together some guidelines to help you select the right linear drain.

Where will you place your drain?

KERDI-LINE-VARIO

KERDI-LINE-VARIO can be placed along the wall or in the center of the shower. For placement at the shower entrance, use KERDI-LINE.

KERDI-LINE

For drain placement at the shower entrance, choose the original KERDI-LINE with the SOLID, PURE, or tileable grate.



Have a grate length in mind?

KERDI-LINE-VARIO

Available in 4-foot and 8-foot lengths, this drain can be easily cut on-site for a custom fit. KERDI-LINE-VARIO is ideal for wall-to-wall installations (but not required), lengths over 70 inches, or when standard KERDI-LINE sizes don't fit.

KERDI-LINE


KERDI-LINE comes in fixed lengths ranging from 19-11/16" to 70-13/16" in 4-inch increments. The largest size that fits the space is recommended. Unlike KERDI-LINE-VARIO, KERDI-LINE cannot be cut to size.



Where is the waste line located?

KERDI-LINE-VARIO

The KERDI-LINE-VARIO channel and grate can be cut to size on either end to fit almost any drain location. This is especially useful when the drain isn't centered or can't be moved because of obstacles like floor joists.

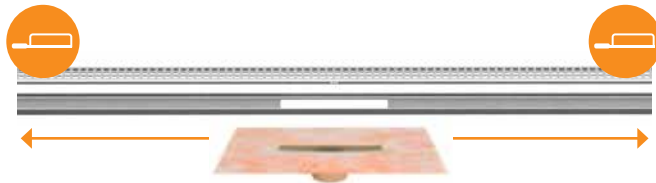

KERDI-LINE

KERDI-LINE offers two outlet options: center or off-set. The off-set outlet is 8" from the edge of the channel. Ensure the waste line position matches the chosen outlet.



How much water will run through your shower?



KERDI-LINE-VARIO

KERDI-LINE-VARIO features a sleek, low-profile design, making it an excellent choice for showers with a standard water flow of 2.5 gallons per minute (*9.5 liters per minute*) from a single shower head. Its streamlined design ensures a stylish and efficient drainage solution for most residential shower setups.



KERDI-LINE

For showers with more than one water outlet—such as dual heads, body sprays, or rain showers—KERDI-LINE is the ideal choice. Its deeper, wider profile is built to manage higher water volumes, ensuring consistent drainage when flow rates exceed 2.5 gallons per minute (*9.5 liters per minute*).

Integrates with the Schluter®-Shower System

The Schluter®-Shower System is an integrated family of products that together form a fully bonded, watertight assembly for tiled showers. The Schluter-Shower System eliminates the risk of failures due to water and vapor penetration and dramatically reduces total installation time. From drains to shower benches to waterproofing pipe seals, Schluter offers everything you need to ensure a dependable and watertight installation.



Typical Shower Application

- | | |
|---|---|
| 1 KERDI-BOARD
Waterproof building panels | 6 KERDI-LINE-VARIO
Linear drain |
| 2 KERDI
Waterproofing membrane | 7 KERDI-SHOWER-LT/-LTS
Prefabricated shower tray |
| 3 KERDI-BAND
Waterproofing strip | 8 KERDI-BOARD-SC
Prefabricated shower curb |
| 4 KERDI-KERECK-F
Waterproofing corners | 9 KERDI-BOARD-SN
Prefabricated shower niche |
| 5 KERDI-SEAL
Pipe and mixing valve seals | 10 SHELF
Shower shelf |



Schluter® Thin-set Mortar
Made by Schluter, for Schluter products

**Applicable when used as a Thin-set System.
For full warranty details, please visit
[schluter.com/warranty](https://www.schluter.com/warranty)*





Learn More!

- Get product details
- Watch the installation video

