



Catalog Number: UAB111-100

Features and Ratings




- Ringless Meter Cover
- 1 Phase, 3 Wire, 240 VAC
- Painted G90 Steel
- 100A Breaker Factory Installed
- Meter Socket Rating: 100A Continuous
- 4 Jaw Meter Socket, Ringless Type Meter Cover
- 10,000 AIC Max. Rated (See Wiring Diagram for Details)
- For Overhead or Underground Service
- RX Type (Small) Hub Provision with Closure Plate Installed

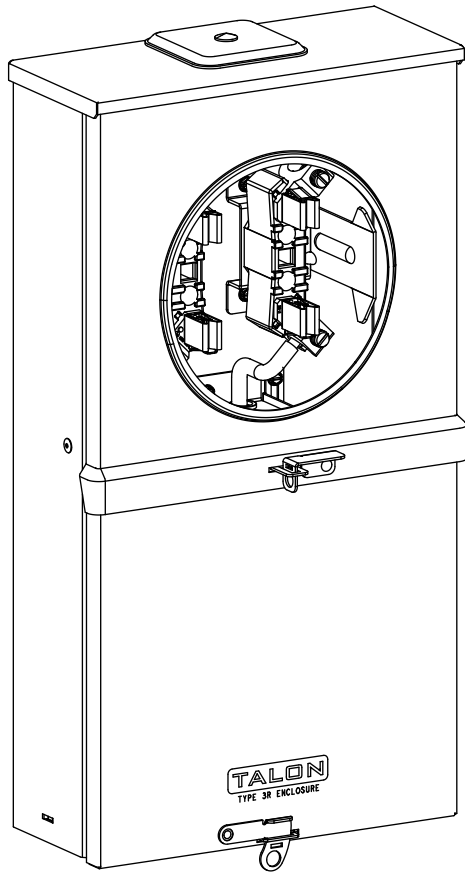

View Shown with Covers and DeadFront Removed

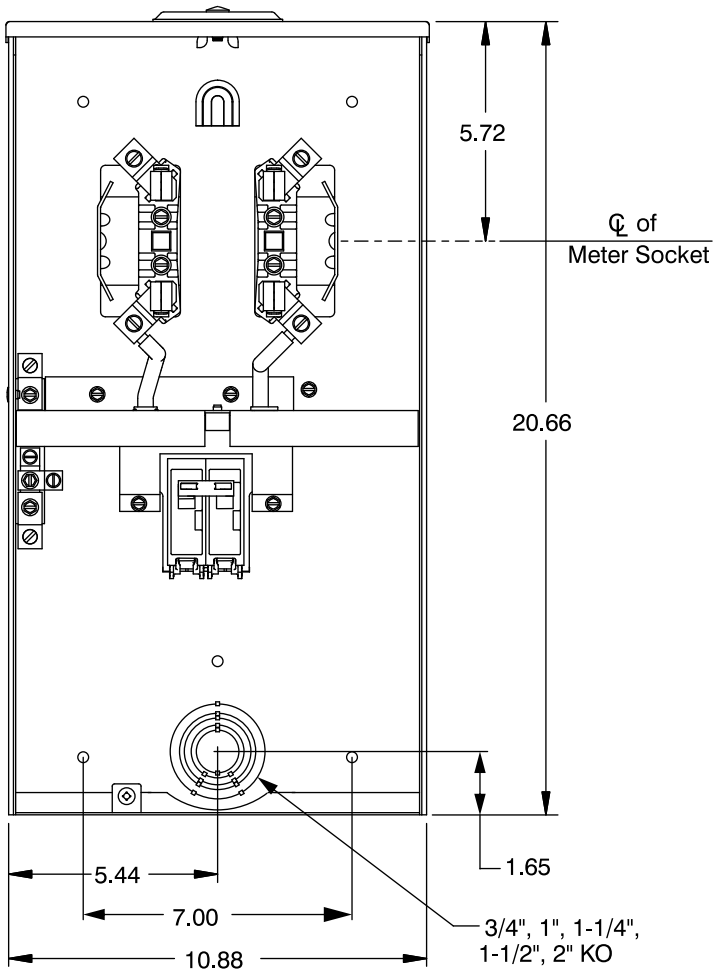

View Shown with Lower Cover Removed

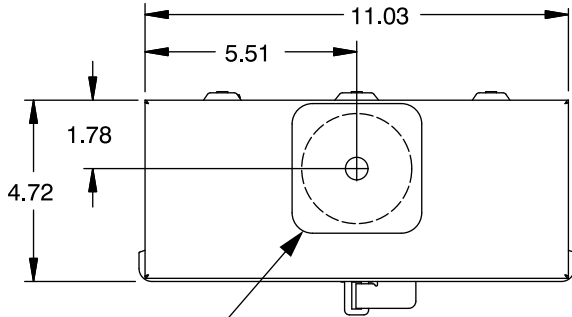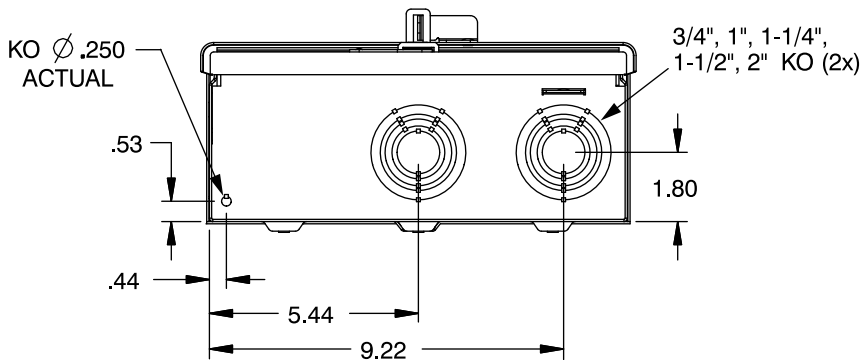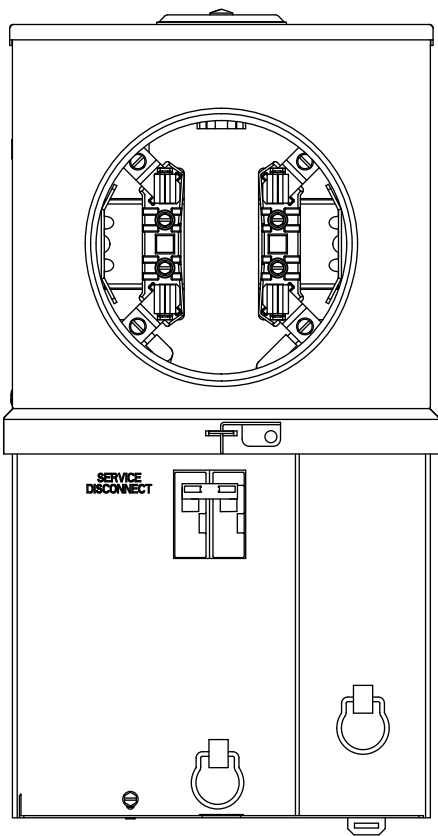


TYPE RX (SMALL) HUB PROVISION
CLOSURE PLATE INSTALLED

Accessories

TYPE RX HUBS	
Trade size (in)	Catalog number
1 1/4"	EC38597 or H38597-2
1 1/2"	EC38598 or H38598-2
2"	EC38599 or H38599-2
2 1/2"	EC38600 or H38600-2
Closure plate . . .	EC38595 or H38595-1

5th Jaw: Catalog No. EC5J2

Schematic

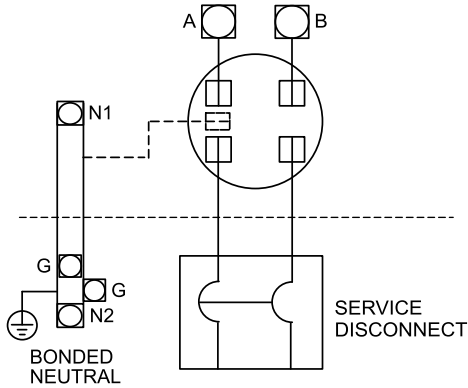

Torques and Wire Sizes

Terminal	Wire Size	Torque
A, B	#14-2/0 AWG	50 lb-in
N1, N2	#14-2/0 AWG	50 lb-in
G	#14-2 AWG	50 lb-in

© 2019 Copyright Siemens Industry, Inc.

TALON

Meter/Breaker Combination

Description: 100A Breaker, 100A Cont, 4 Jaw, 600V AC, Ringless, Painted G90 Steel

KAM 8/23/19 DO NOT SCALE DRAWING Dwg No: UAB111-100