
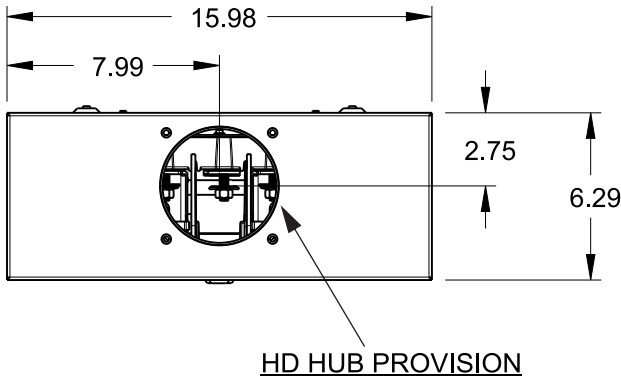


Catalog Number: 41105-02FL

Features and Ratings

- Ringless Type Meter Socket
- 320A Continuous, 400A Max.
- Outdoor Enclosure (NEMA Type 3R)
- 1 Phase, 3 Wire, 600V AC
- 5 Jaw, 9 O'clock 5th Jaw
- HQ Clamp Jaw Lever Bypass Meter Socket
- For Overhead or Underground Service
- HD ub Opening With Coverplate Installed
- Aluminum enclosure
- Stainless steel latch and hasp



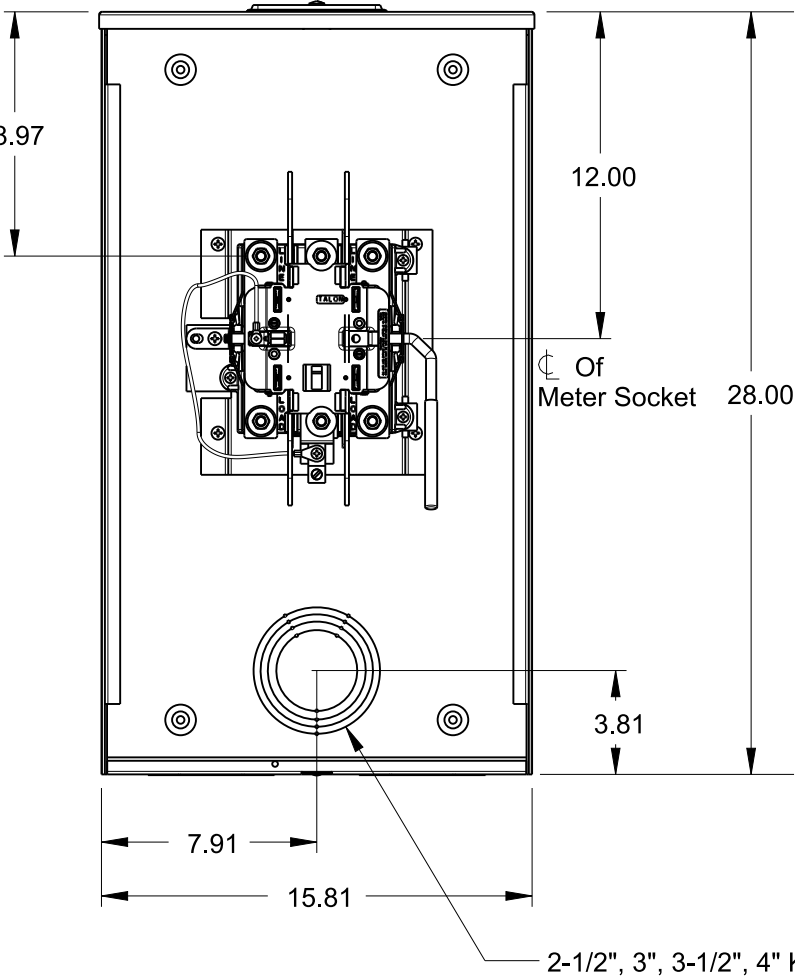


Accessories

Meter Opening Cover Plate
Cat No: H39968
HD HUB KITS
Cat No: H56856-2 (3.00")
Cat No: H56857-2 (3.50")
Cat No: H56858-2 (4.00")
HD HUB KITS
Cat No: EC56856 (3.00")
Cat No: EC56857 (3.50")
Cat No: EC56858 (4.00")
HUB COVER PLATE
Cat No: H56933-3

Lugs,
Wire Sizes and Torques

LOCATION	PART NO.	HEX DRIVE SIZE	LUG SIZE	TORQUE
LINE	H60162	9/16	#4-600Kcmil	500 LB-IN
LINE, LOAD	H56732-2	9/16	#4-350Kcmil	275 LB-IN
NEUTRAL	H56732-2	9/16	#4-350Kcmil	275 LB-IN
GROUND	H67554	7/16	#14-2/0	50 LB-IN

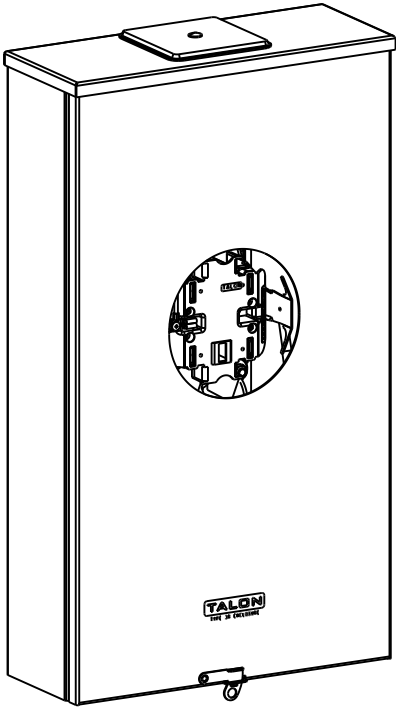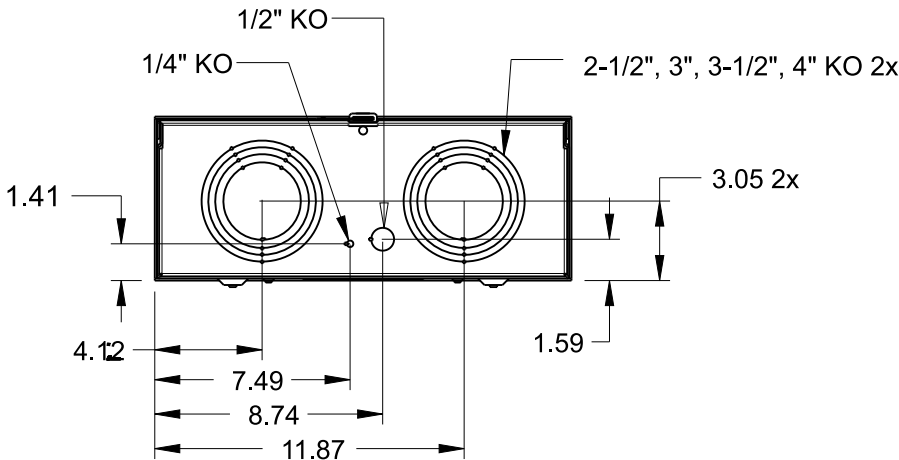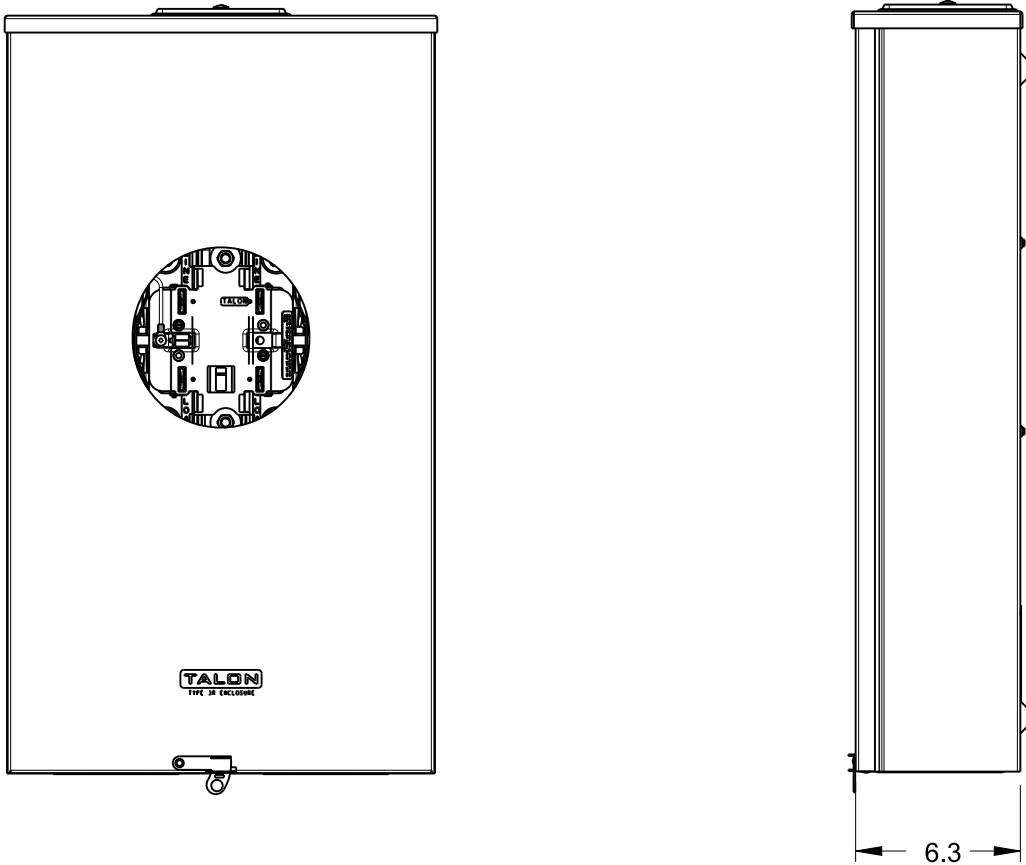

TALON
Meter Socket

Description:
**320A Cont, 5 Jaw, HQ-5S, 600V AC
Aluminum Enclosure**