

## P2839 Linear Vanity

Wall mounted • Dry location listed 

### Description:

A tubular design pairs with a geometric back plate and mesh accents to create Truss – a fixture than can be mounted horizontally or vertically. Circular etched opal glass contains an integrated LED source to provide a variety of energy and cost savings benefits for the homeowner. Modern style and continuous illumination are ideal for a variety of bath and vanity settings. LED source features 3000K and 90+ CRI benefits, as well as a lifespan of more than 40,000 hours.

### Specifications:

- Brushed Nickel (-09) (Plated)
- Steel construction
- Etched White glass diffuser
- Tubular design pairs with a geometric back plate and mesh accents.
- Can be mounted horizontally or vertically.
- Circular etched opal glass contains an integrated LED source.
- Dimmable to 10% with many ELV dimmers
- 1,276 lumens 73 lumens/watt
- 3000K color temperature, 90+ CRI
- Dimmable to 10% brightness (See Dimming Notes)back plate covers a standard 4" octagonal recessed outlet box
- Mounting bracket for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- 

### Performance:

Number of Modules	1
Input Power	35w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	1226/35 (LM-79)
CCT	3000 K
CRI	93
Life (hours)	42,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cETLus Dry location listed

## P2839-0930K9

### Images:




### Dimensions:

Width: 22-1/2"

Depth: 3-7/8"

Height: 4-3/4"

H/CTR: 2-3/8"

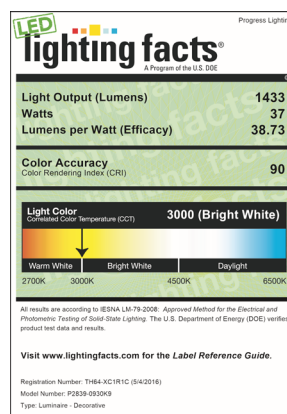

## P2839-0930K9

### Dimming Notes:

---

P2839 is designed to be compatible with many Electronic Low Voltage (ELV/Reverse Phase) controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

Lutron Maestro MAELV-600

Lutron Spacer system SPSELV-600

Lutron Renoir II AWRMG-EAW

Leviton SureSlide 6615-P

Lutron Maestro MAELV-600

Lutron Spacer system SPSELV-600

Lutron Renoir II AWRMG-EAW

Leviton SureSlide 6615-P

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.