

# MINI PENDANT

## Assembly Instructions



### CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

### TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers

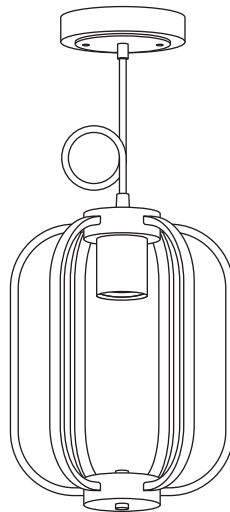


Fixture



Mounting Unit



Mounting Screw



Wire Nut



Cap Nut


**\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

## MINI PENDANT

### Assembly Instructions

#### STEP 1

Use the **mounting screws** to attach the **mounting unit** to the junction box

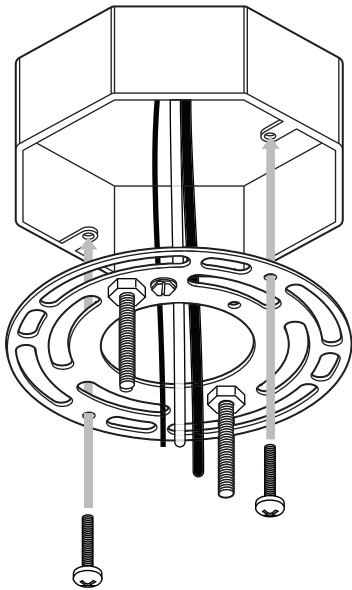

#### STEP 2



Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black \*Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

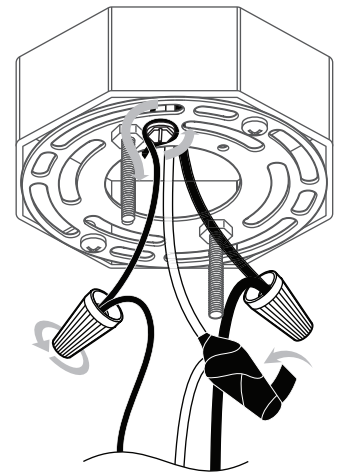

#### STEP 3

Place the **canopy** over the **mounting unit** and secure the **fixture** with the **cap nuts**.

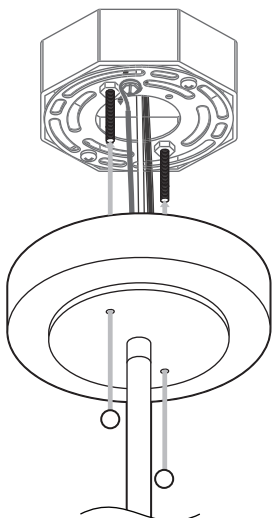

#### STEP 4

Install bulb (not included)

