





USE AND CARE MANUAL

1 LIGHT OUTDOOR POST LIGHT

Model number: 21619

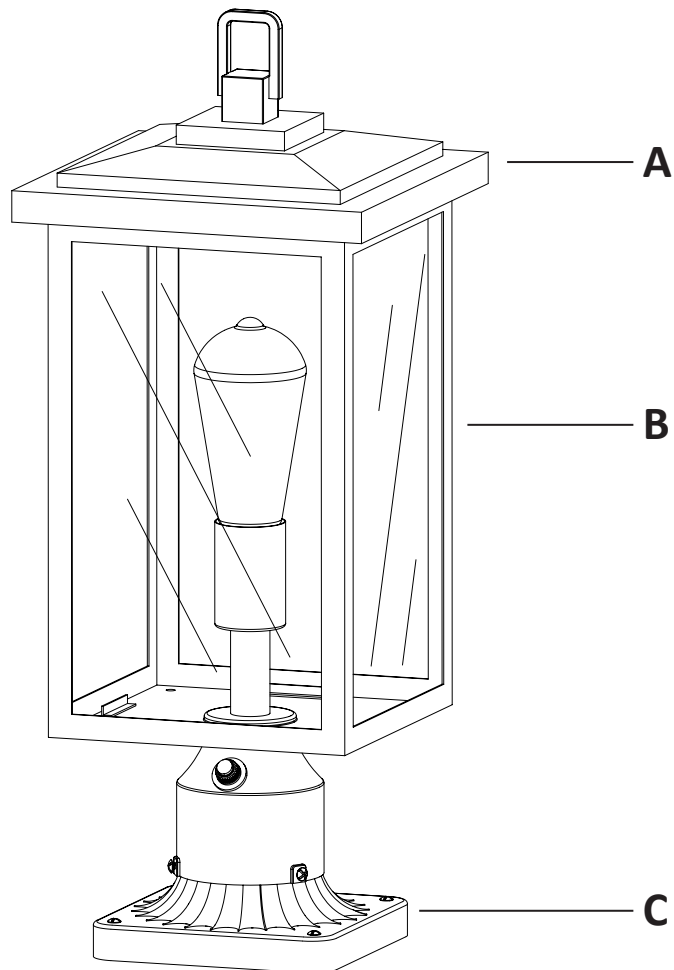

Hardware (Parts are not to scale)

H1 Support screw (Pre-assembled to fixture body and square cap) 7 pcs 	H2 Wire connector 3 pcs 	H3 Plastic anchor 4 pcs 
H4 Wood screw 4 pcs 	H5 Template 1 pc 	

THIS MANUAL CONTAINS IMPORTANT SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.

IMPORTANT SAFETY INFORMATION

- Please read and understand this entire manual before attempting to assemble, operate or install the product.
 - Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
 - Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
 - All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections. If you do not have electrical wiring experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.
 - Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
 - Do not exceed the recommended wattage. Refer to the re-lamping label on the light socket for maximum wattage.
 - Do not replace a bulb when electrical outlet switch is turned to the “ON” position.
 - Do not immerse your lamp in water; doing so will damage the wire.
 - Keep materials that burn easily away from lighted bulbs.
 - This outdoor lantern has been permanently installed a photocell switch, photocell turns lantern ON at dusk and automatically turns OFF at dawn. **Note:** don't cover the photocell switch at anytime.
-


PREPARATION

- Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.
 - Tools required for assembly (not included): flathead screwdriver, phillips screwdriver, pliers, electrical tape, wire cutters, safety glasses, ladder, wire stripper, pencil, drill, hammer, caulk.
-

INSTALLATION


1 Installing the plastic anchors

- Place the template (H5) in the desired position, and then mark the location on the four holes with a pencil (not provided).
- Drill pilot holes at each marked location and push the plastic anchors (H3) into the holes using a hammer.

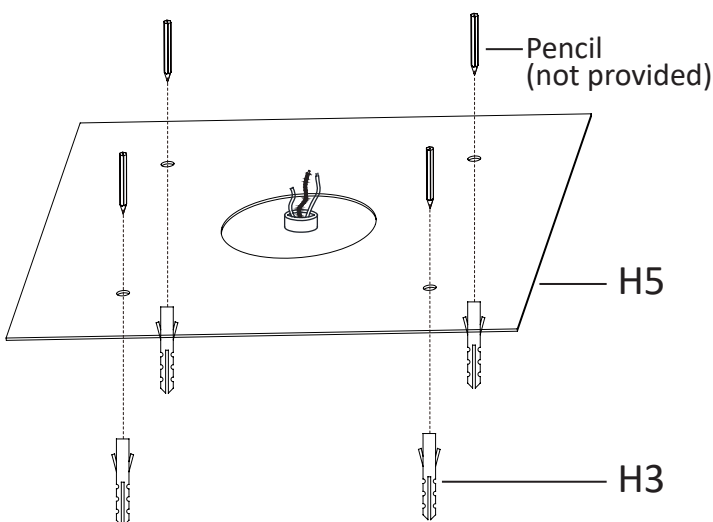

2 Installing the base


- Align the holes of the base with the plastic anchors (H3), and secure the base (C) with the four wood screws (H4).

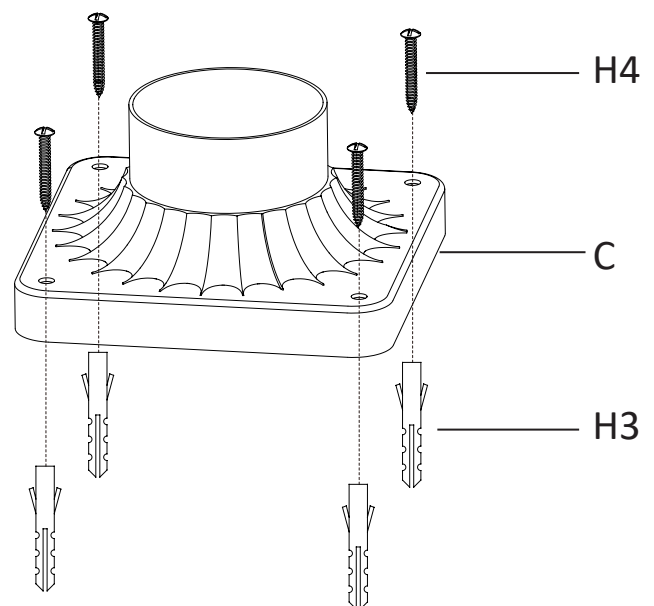

INSTALLATION (continued)


3 Making the electrical connections

- Strip 3/4 in. of insulation from the wire ends.
- Connect the black wire from the fixture to the black wire from the desired position, then connect the white wire from the fixture to the white wire from the desired position.
- Connect the bare copper wire from the fixture to the bare copper wire from the base (C) and the ground wire from the desired position.
- Cover the wires with wire connectors (H2). Tape the wire connectors (H2) and wires together, and carefully position all wires inside the base (C).

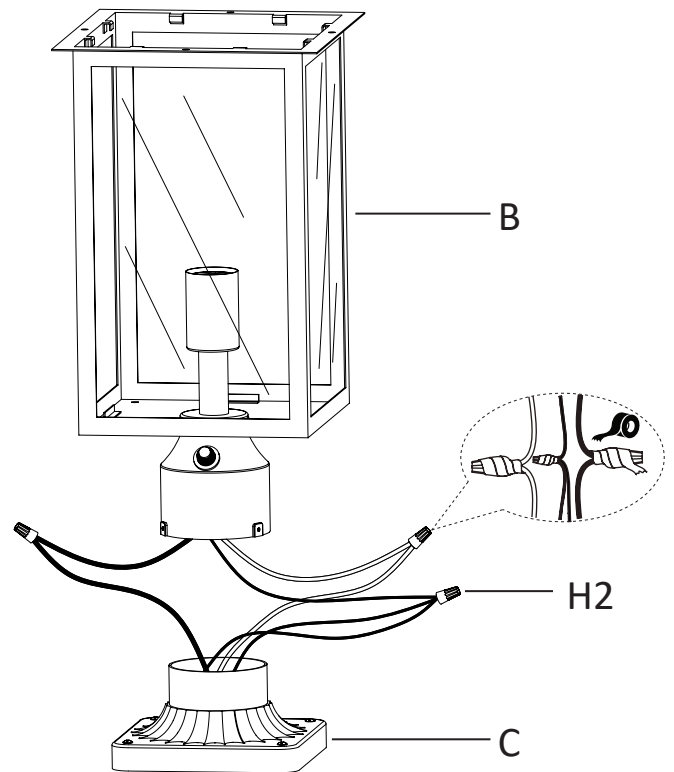

4 Installing the fixture body to base


- Unscrew the three support screws (H1) from the base cap of the fixture body (B).
- Place the base cap of the fixture body (B) over the base (C), and ensure the photocell is facing forward, then secure with the three support screws (H1).

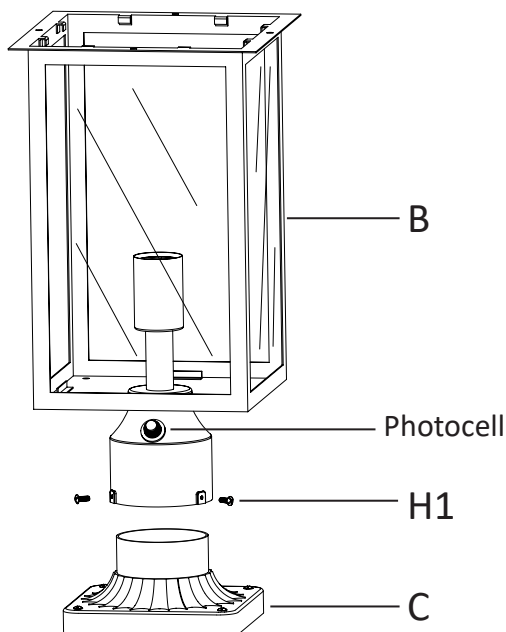

5 Installing the light bulb

- Install the light bulb (not provided) into the socket. Use one **MAX 100 W medium base (E26) type "ST64"** bulb (recommended).


NOTE: You can also use one **MAX 100 W medium base (E26) type "A"** bulb or **MAX 16W medium base (E26) self-ballasted LED** bulb. Do not exceed the recommended wattage.

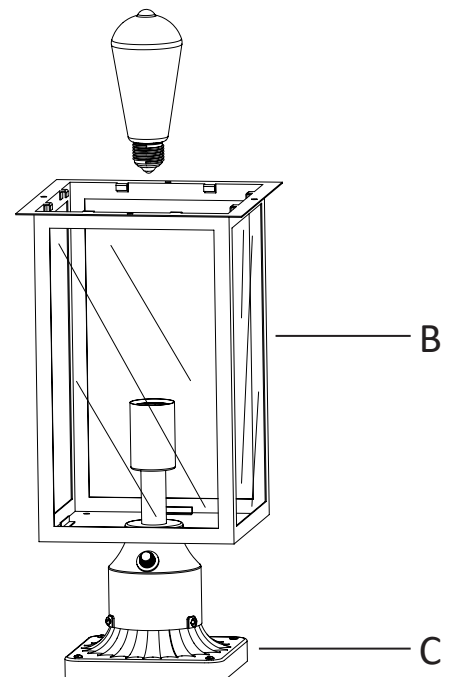

INSTALLATION (continued)


6 Assembling the square cap

- Unscrew the four screws (H1) from the square cap (A).
- Place the square cap (A) over the fixture body (B), and secure with the four screws (H1).

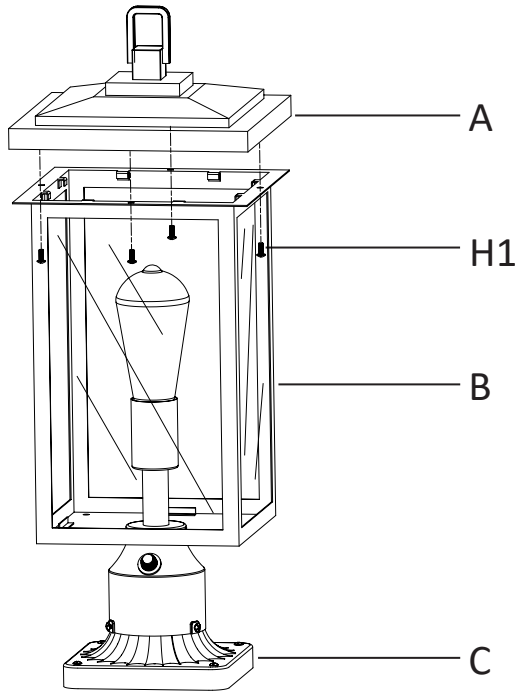


7 Applying the caulk

- Use weather-resistant caulk (not included) to seal around the base (C).

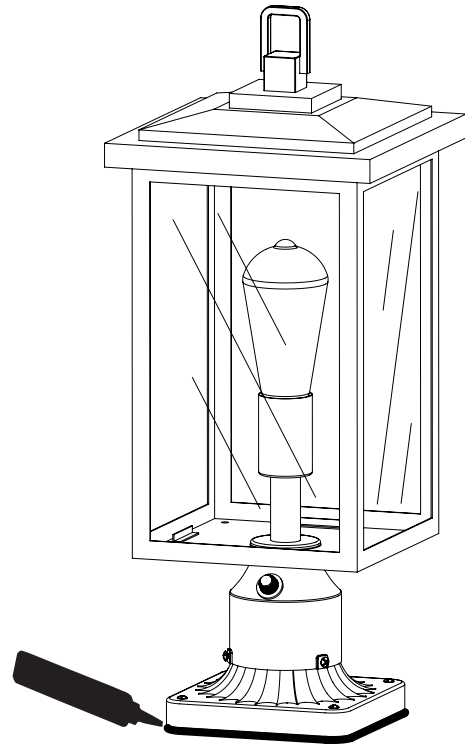

8 Installing the fixture on a post

- This lamp can be installed on commercially available post (not provided).
- Repeat steps 3-6 for installation.

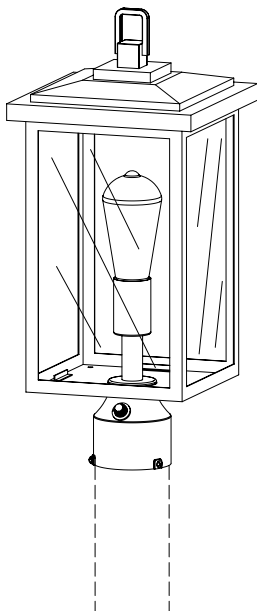

CLEANING

- Do not use any cleaners with chemicals, solvents, or harsh abrasives. Use only a dry, soft cloth to dust or wipe carefully.
- To clean the fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Use a dry or slightly dampened, clean cloth to wipe the exterior surface of the fixture.

TROUBLESHOOTING

- The light does not come on at all:
 - a) Check whether the bulbs were burned out.
 - b) Make sure the wall switch is on.
 - c) Make sure the wiring is correct.
 - d) Make sure the circuit breaker is set in the "ON" position.
- Fuse blows or circuit trips when light is turned on.
 - a) Check for crossed wires, ensure wiring is correct.