




SPEC SHEET

KoolMore 17 in. Slim Commercial Merchandiser Refrigerator 7 Cu. Ft. in Black, ETL Listed


Model: KM-MDR-17S

FEATURES

- 7 Cu. Ft. Storage: Spacious with five adjustable wire shelves (33 lbs. each) for optimal organization and airflow.
- Precise Temperature Control: 35.6°F to 50°F range with mechanical thermostat and LED display for easy monitoring.
- Double-Paneled Glass Door: Tempered glass insulates efficiently, reduces fogging, and ensures clear visibility.
- Energy Efficient: Uses 343.8 kWh/year, cost-effective for continuous operation.
- Automatic Defrost: Prevents ice buildup, reduces maintenance, and enhances performance.
- Quiet Operation: 55 dB, ideal for noise-sensitive areas like cafes or offices.
- Bright LED Lighting: Top-mounted LEDs provide efficient illumination with minimal heat.
- Durable Construction: Glass, plastic, and painted steel exterior; scratch-resistant steel interior; sleek black finish.
- Compact Design: 78.2" H x 19.25" W x 18.62" D, needs only 2" clearance for ventilation.
- Flexible Mobility: Four casters (two with brakes) and two adjustable feet for easy movement and stability.
- ETL Certified: Meets safety standards with a 1-year warranty for parts and labor.



CLOSE UP IMAGES



TECHNICAL SPECS

Dimensions

Length	16.93
Height	78.2
Width	19.25
Interior Depth	15.1
Interior Width	14.25
Interior Height	61.81
Shelf Width	13.58
Shelf Depth	12.91
Depth Excluding Handles	18.62
Depth Including Handles	20.28
Depth Less Door	16.73
Depth With Door Open 90 Degrees	34.45
Power Cord Length	94.5
Minimum Back Air Clearance In	2 in.
Minimum Side Air Clearance In	2 in.

Capacity

Gross Cubic Feet	7.77
Net Cubic Feet	7.03
Individual Shelf Capacity	33 lbs.


Features & Materials

Door Style	Swing
Number Of Doors	1
Number Of Shelves	5
Defrost Type	Automatic
Refrigerant Type	R-290
Temperature Control Type	Fahrenheit
Temperature Range	35.6-50 F
Ambient Temperature Range	95 F
Casters	4
Interior Material	Painted Steel
Exterior Material	Glass, Plastic and Painted Steel
Shelf Material Type	Wire
Noise	55 dB

Electric & Certification

Amps	2.6
Phase	1
Voltage	110
Wattage	230
Hertz	60
Plug Type	NEMA 5-15P
Certifications	ETL For Safety & Sanitation

Plan View

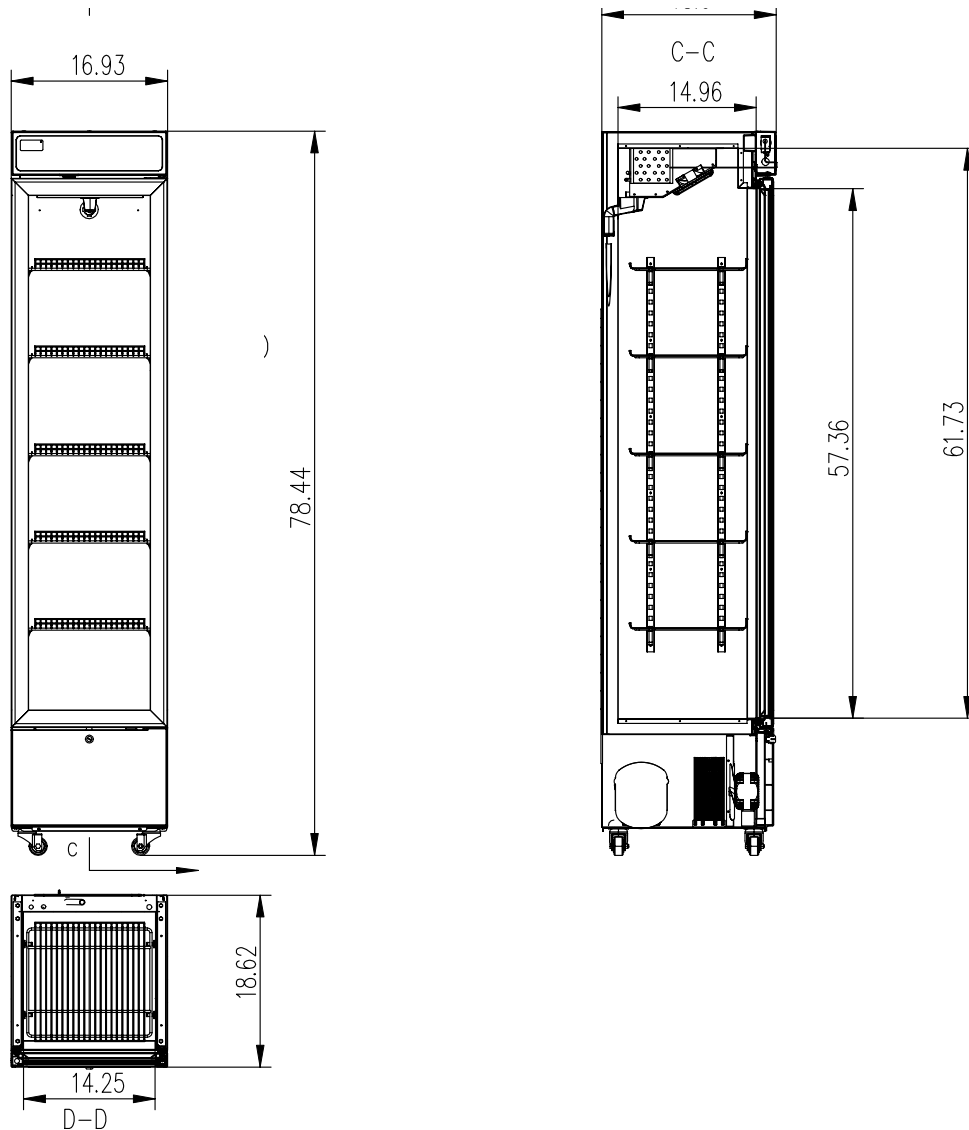

CERTIFICATIONS



706 Eastern Parkway STE 1G, Brooklyn NY 11213
718-576-6342
info@koolmore.com