

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, outdoor covered areas, stairways and much more.

CONSTRUCTION

This contemporary shaped fixture features a matte white acrylic diffuser on the round versions, a polycarbonate diffuser on the square versions, and a robust aluminum housing. Wet location models are equipped with protective gasketing.

OPTICS

Produces the following lumens at 50,000 hours life (WH finish):

Round versions

1768 lumens (13")

3000 K: 1898 lumens (13")

4000 K: 2000 lumens (13")

ELECTRICAL

Fixture operates at 120 volts, 60 Hz. 13" Round standard input = 28 watts, 71 lumens per watt.

Works with most standard incandescent dimmers (see list of suggested dimmers on page 2).

INSTALLATION

All mounting hardware included. Suitable for use within closet storage spaces when installed per NEC requirements.

LISTINGS

CSA certified for sale in the USA and Canada. The 13" round size is UL listed for sale in the USA and Canada. Also certified for Damp Location. For Wet Location the WL OPTION must be added to model number (only available with FMML).

Round Versi U.S. Patent No. D691,763. Square Versi U.S. Patent No. D832,487.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type

Decorative Indoor

Versi Lite™

LED Flush Mount



13"

HIGH-PERFORMANCE LED




Round Specifications

13" Height: 2-1/2 (6.4)

13" Width: 13 (33.0)

13" Weight: 3.2 lbs (1.45 kg)

All dimensions are inches (centimeters) unless otherwise indicated.



ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: FMML 13 830 WL

FMML					
Series	Size	CRI	Color temperature	Fixture finish	Option
FMML LED Round Versi Lite flush mount	13 13" diameter	8 >80	27 2700 K 30 3000 K 35 3500 K 40 4000 K	(blank) Textured white DDBT Textured bronze DNA Natural aluminum ¹	WL Wet location ²

Notes

¹ 4000K (40) with DNA not available with WL (wet location) option.

² WL (wet location) not available in combination with 4000K (40) and DNA finish.



FMML Versi Flush Mount

Suggested Dimmers

The FMML is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part Number (s)	Manufacturer	Part Number (s)
Leviton	6633P	Lutron	NTELV 300
Leviton	IPL06	Lutron	NLV 600
Leviton	6674P	Synergy	ISD 600/120
Leviton	IPE04	Pass & Seymour	HCL 453PTCCCV6 (13" only)
Lutron	DVELV 300P		

LIGHTING FACTS

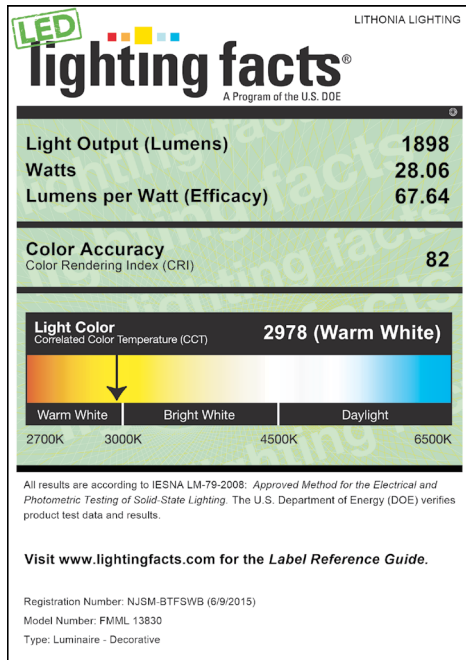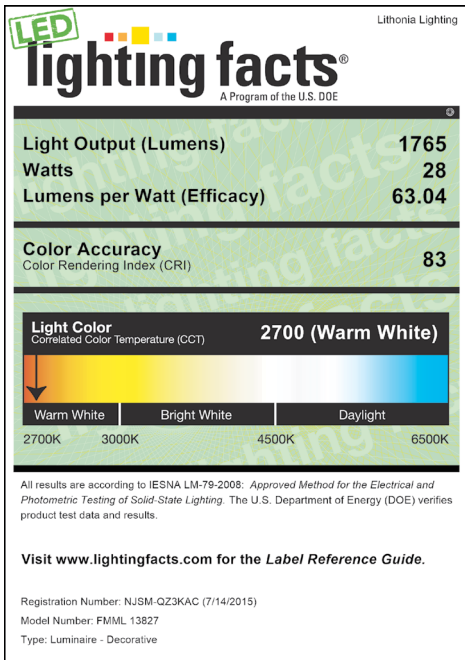

LIGHTING FACTS

